

# **VG35S2S240X0M1 wireless module**

## **Hardware specification**

**V1.0**

## Table of contents

I. Overview.....	1
2. Main technical parameters.....	3
3. Pin location diagram.....	4
4. Pin description.....	5
5. Hardware design guidance and precautions.....	6
5.1. Hardware connection diagram.....	6
5.2. Power supply design and related precautions.....	6
5.3. Antenna design and guidance.....	7
5.4. Module placement and layout.....	10
6. Precautions for programming development.....	11
7. Reflow soldering curve.....	12
8. Static electricity damage warning.....	12
9. Packaging information.....	13
Mechanical dimensions (unit: mm).....	13
10. Version update instructions.....	14
11. Procurement selection table.....	14
12. Statement.....	14
13. Contact us.....	15

## I. Overview

VG35S2S240X0M1 series of wireless modules, which are based on Si24R1. The wireless transceiver chip is designed to be compact, high-power, and high-speed. 2.4G Two-way wireless transceiver module. The module integrates a power amplifier (PA) and a low-noise amplifier (LNA), and its maximum RF transmit power can reach 20dBm, compared to normal Pass 2.4G wireless module, its greater transmit power and higher receiving sensitivity give it better communication link budget capabilities.

Si24R1 is a chip operating at 2.4GHz ISM band, designed specifically for high-rate data transmission wireless applications, integrated embedded ARQ base band protocol engine wireless transceiver chip. The operating frequency range is 2400MHz-2525MHz, with a total of 126MHz bandwidth channel. Si24R1 adopts GFSK/FSK number Modulation and demodulation technology. Data transfer rate and PA output power can be adjusted, supports three data rates: 2Mbps, 1Mbps, and 250Kbps.

The module integrates all radio frequency related functions and devices. Users can use this module to easily develop products without having an in-depth understanding of radio frequency circuit design.

Wireless solutions and wireless IoT devices with stable performance and high reliability.

### Product main features:

- . Works at 2.4GHz ISM frequency band
- . Modulation: GFSK/FSK
- . Data rate: 2Mbps/1Mbps/250Kbps
- . Ultra-low shutdown power consumption: <2uA
- . Ultra-low standby power consumption: 15uA
- . Internally integrated high PSRR LDO
- . Power supply voltage range: 3.0-3.6V
- . Receiving sensitivity: -102dBm @250Kbps
- . Maximum transmit power: 20dBm


**application:**

1. Wireless remote control and somatosensory equipment
2. Active RFID, NFC
3. Smart grid, smart home
4. wireless audio
5. Wireless data transmission
6. Ad hoc wireless sensor network

## 2. Main technical parameters

Technical index	parameter	Remark
voltage range	3.0 ~ 3.6V	generally 3.3V
Frequency Range	2.4GHz	2400MHz-2525MHz
Maximum output power	20dBm	Programmable configuration
Wireless speed	250Kbps/1Mbps/2Mbps	Programmable configuration
Modulation	GFSK/FSK	
Receive sensitivity	-102dBm	@250Kbps
channel spacing	1MHz	2MPbs at least 2MHz when
Emission current	120mA	Transmit power= 20dBm
receive current	23mA	@250Kbps
Sleep current	<2uA	shutdown mode
Driver interface	SPI	standard 4Wire SPI, SPI Clock: <=10MHz
Antenna impedance	50ohm	
Antenna connection method	IPEX-1 Seat or stamp half hole or plate mount PCB antenna	Default onboard PCB Antenna, if needed IPEX-1 seat or Stamp half hole, need to modify the selected resistor
storage temperature	-40°C ~ +125°C	
Operating temperature	-40°C ~ +85°C	Industrial grade
Size	16.0x 24.0mm	

### 3. Pin location diagram

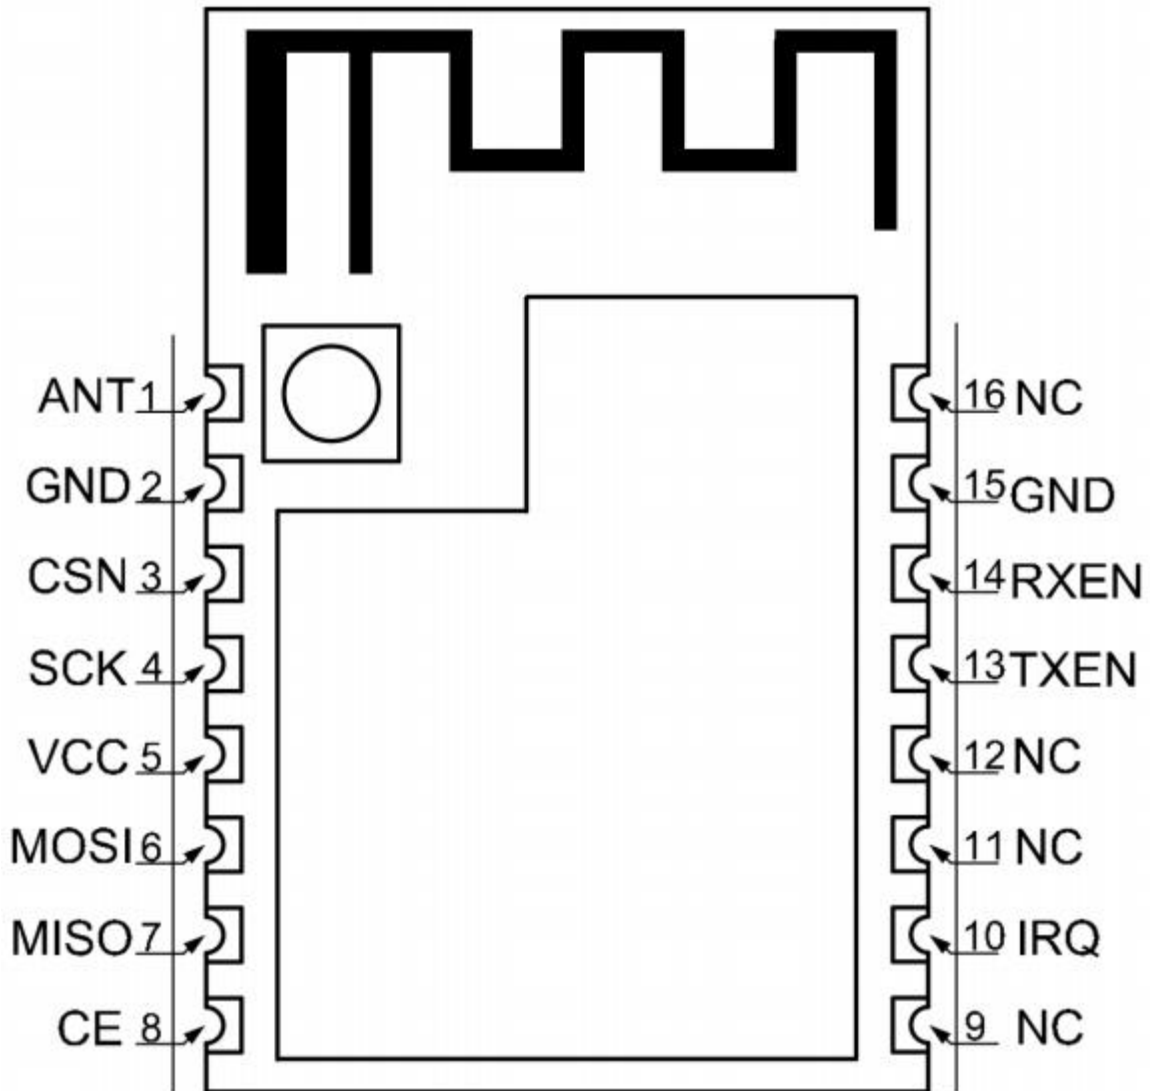


picture 3-1 top view

## 4. Pin description


number	pin	type	describe
1	ANT	I/O	Antenna external interface, matching 50 Ω, need to adjust the internal jump selection resistor of the module
2	GND	power supply	land
3	CSN	I	SPI interface SPI Chip Select
4	SCK	I	SPI Interface clock input
5	VCC	power supply	Positive pole of power supply
6	MOSI	I	SPI interface MOSI data input
7	MISO	O	SPI interface MISO data output
8	CE	I	Chip start signal, Activate RX or Tx model
9	NC	---	internal floating
10	IRQ	O	interrupt signal, Active low
11	NC	---	internal floating
12	NC	---	internal floating
13	TXEN	I	module PA Control foot, when firing TXEN=1; RXEN=0, in sleep mode TXEN= 0;RXEN=0
14	RXEN	I	module LNA Control pin, when receiving TXEN=0;RXEN=1, when sleeping T XEN=0;RXEN=0
15	GND	power supply	land
16	NC	---	internal floating

## 5. Hardware design guidance and precautions

### 5.1. Hardware connection diagram

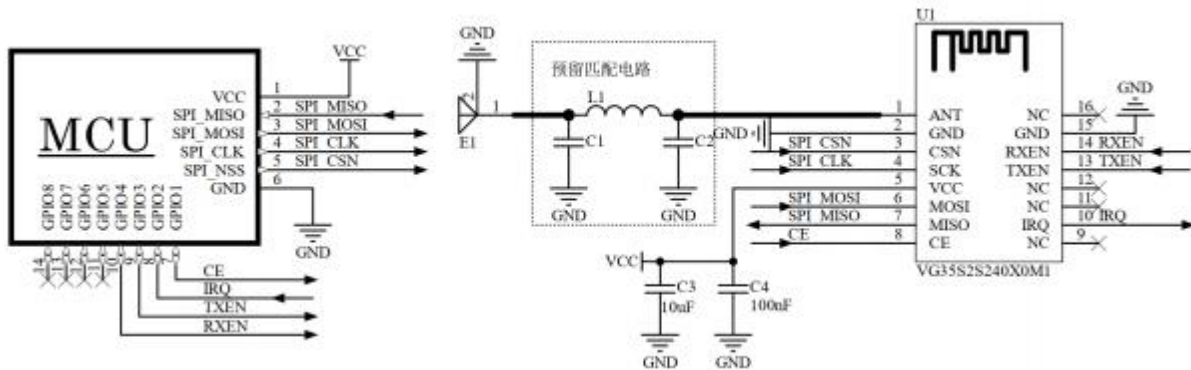

picture 5-1 Programming and development of hardware connections (stamp hole external antenna)

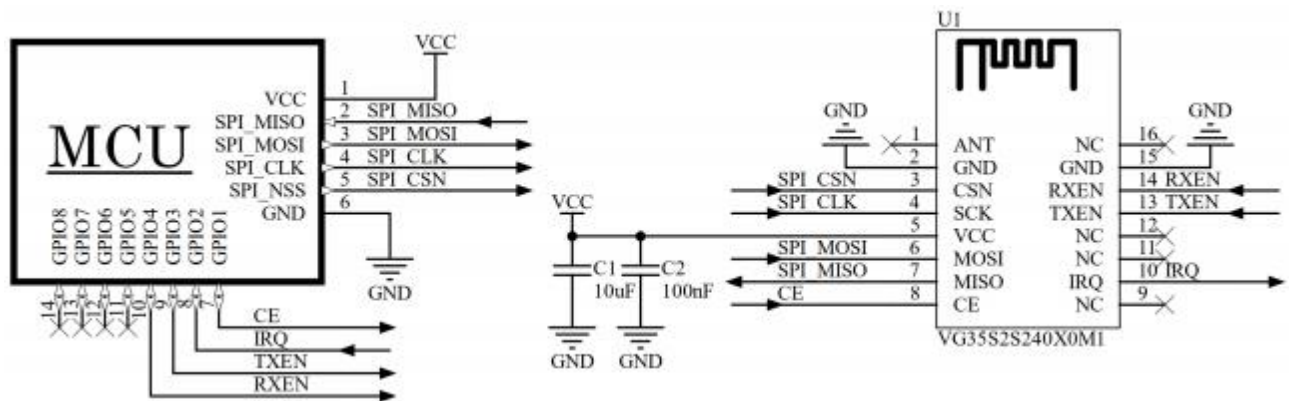

picture 5-2 Programming development hardware connection (onboard PCB antenna)

### 5.2. Power supply design and related precautions

1. Please pay attention to the correct connection of the positive and negative poles of the power supply, and ensure that the power supply voltage is within the recommended supply voltage range. If it exceeds the maximum allowable power supply range of the module, it will cause Otherwise the module will be permanently damaged; the filter capacitor of the module power pin should be as close as possible to the module power pin.

2. In the module power supply system, Excessive ripple may be coupled to lines susceptible to interference through wires or ground planes. such as antennas, feeders, clock slines and other sensitive signal lines, It is easy to cause the RF performance of the module to deteriorate, so we recommend using LDO as the power supply for the wireless module.
3. Select LDO When installing a voltage stabilizing chip, you need to pay attention to the heat dissipation of the power supply and LDO Stable output current driving capability; considering the long-term stable operation of the whole machine, it is recommended Recommended reservation More than 50% current output margin.
4. It is best to use one module separately LDO Stabilized power supply; if using DC-DC power supply chip, be sure to add one at the end LDO As isolation of the module power supply, Prevent the noise of the switching power supply chip from interfering with the working performance of the radio frequency.
5. MCU If the communication line between the module and the module is used 5V level, must be connected in series 1K -5.1K Resistor (not recommended, still risk of damage).
6. Keep the RF module as far away from high-voltage devices as possible, because the electromagnetic waves of high-voltage devices will also have a certain impact on RF signals.
7. High-frequency digital traces, high-frequency analog traces, and high-current power traces should be kept away from the bottom of the module. If they have to pass under the module, they need to be routed. Put the module PCB Another layer of the bottom board, and ensure that the copper underneath the module is well grounded.

## 5.3. Antenna design and guidance

### 5.3.1. External antenna and PCB Antenna selection

The factory default of the module is to select onboard PCB antenna path, If you need to use an external antenna, you need to jump the transfer resistor to the external antenna path, as shown in the figure below.

Shown:

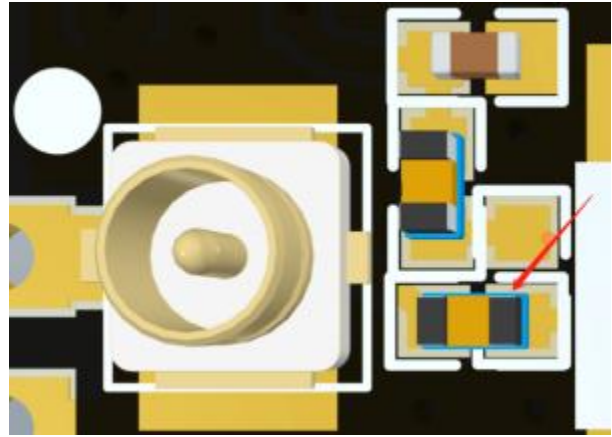
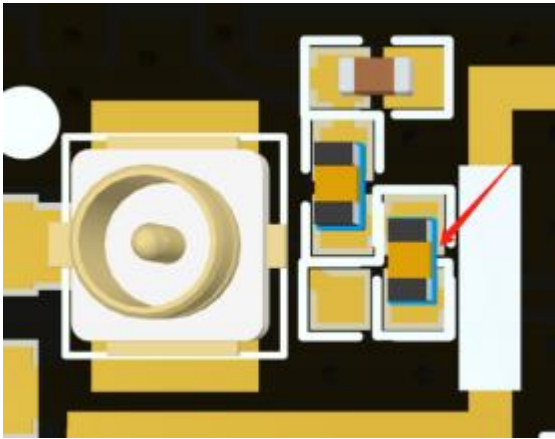


Figure 5-3 Onboard PCB antenna jump resistor connection

Figure 5-4 IPEX-1 seat or stamp half hole jump resistor connection

### 5.3.2. Stamp hole interface RF design

When selecting the module RF output interface in the form of a stamp hole, use a 50ohm characteristic impedance trace to connect to the base plate during design. Antenna on PCB. need Pay attention to the bottom platePCBRF traces need to be as short as possible, 2.4GSignals are more sensitive to trace length. It is recommended that the longest trace length does not exceed 10mm, and the trace width requires Maintain continuity; when you need to turn, try not to take sharp or right angles. It is recommended to take arcs.

<p>The first recommended way to turn RF cabling</p>	
<p>The second recommended RF wiring turning method</p>	
<p>A poor way to turn RF cables, not recommended</p>	

In order to ensure that the RF wiring on the backplane is 50Ohm can be adjusted according to the following parameters according to different plate thicknesses. The following simulation values, for reference only.

RF wiring adopts 20mil Line width	The plate thickness is 1.0mm hour, The spacing between ground copper and traces is 5.3mil
	The plate thickness is 1.2mm hour, The spacing between ground copper and traces is 5.1mil
	The plate thickness is 1.6mm hour, The spacing between ground copper and traces is 5mil
RF wiring adopts 25mil Line width	The plate thickness is 1.0mm hour, The spacing between ground copper and traces is 6.3mil
	The plate thickness is 1.2mm hour, The spacing between ground copper and traces is 6mil
	The plate thickness is 1.6mm hour, The spacing between ground copper and traces is 5.7mil
RF wiring adopts 30mil Line width	The plate thickness is 1.0mm hour, The spacing between ground copper and traces is 7.6mil
	The plate thickness is 1.2mm hour, The spacing between ground copper and traces is 7.1mil
	The plate thickness is 1.6mm hour, The spacing between ground copper and traces is 6.6mil

### 5.3.3 external antenna

External antenna refers to the antenna that the module installs outside the product shell through IPEX extension cable, SMA and other standard radio frequency interfaces, including rod antenna, suction cup antenna, fiberglass antenna, etc. External antennas are basically standard products. In order to better choose an antenna suitable for the module, the following should be paid attention to when selecting the parameters of the antenna during the antenna selection process:


1. The working frequency of the antenna and the working frequency of the corresponding module should be consistent.
2. The input characteristic impedance of the antenna should be 50ohm.
3. The size of the antenna interface should match the size of the antenna interface of the module.

4. The standing wave ratio ( VSWR ) of the antenna is recommended to be less than 2, and the antenna should have a suitable frequency bandwidth (covering the frequencies used in the actual application of specific products).

### 5.4. Module placement and layout

The radiation and reception of radio frequency signals are achieved through antennas. The grounded copper has a strong absorption effect on radio frequencies, so PCBThe onboard antenna cannot be

The copper sheet on the base plate covers and surrounds it, It cannot be covered or surrounded by batteries or other metal devices, otherwise the communication distance will be greatly reduced.

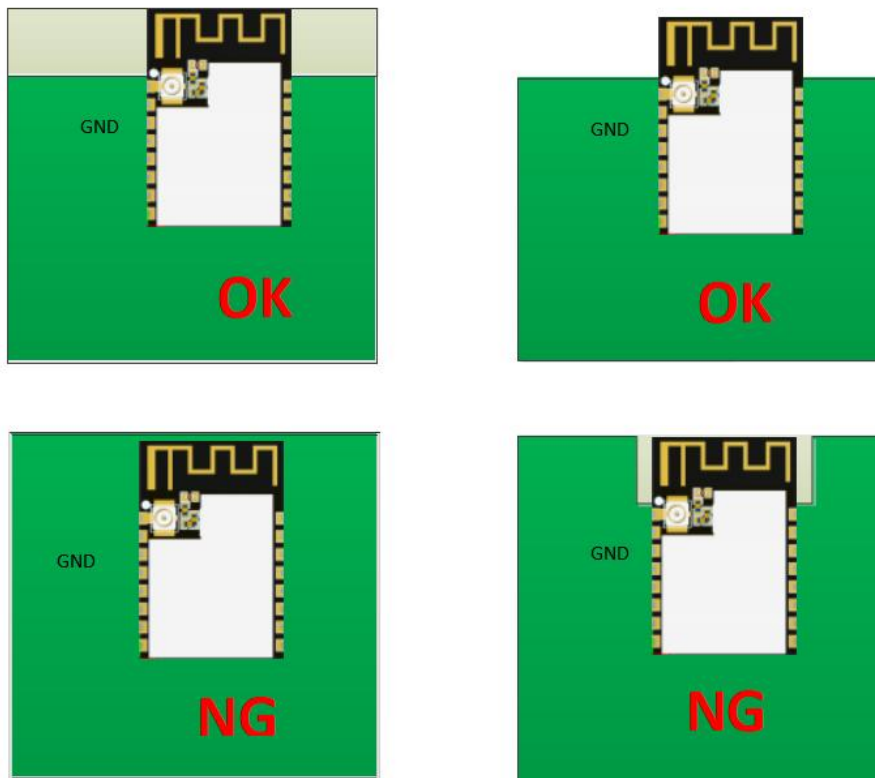

picture5-5 Suggestions on module placement and layout


## 6. Precautions for programming development

The module has been integrated PA&LNA power amplifier device, so the chip output power is set to 0dBm. That's it, the maximum setting value should not exceed 5dBm, otherwise, it is easy to damage the inside of the module. PA device.

The TXEN pin and RXEN pin of the module are the logic control pins for controlling the PA&LNA device inside the module. Please pay attention to the control levels of the module TXEN and RXEN pin when using it. The control logic is listed below:

model	TXEN	RXEN
<b>emission</b>	1	0
<b>take over</b>	0	1
<b>hibernate</b>	0	0

## 7. Reflow soldering curve

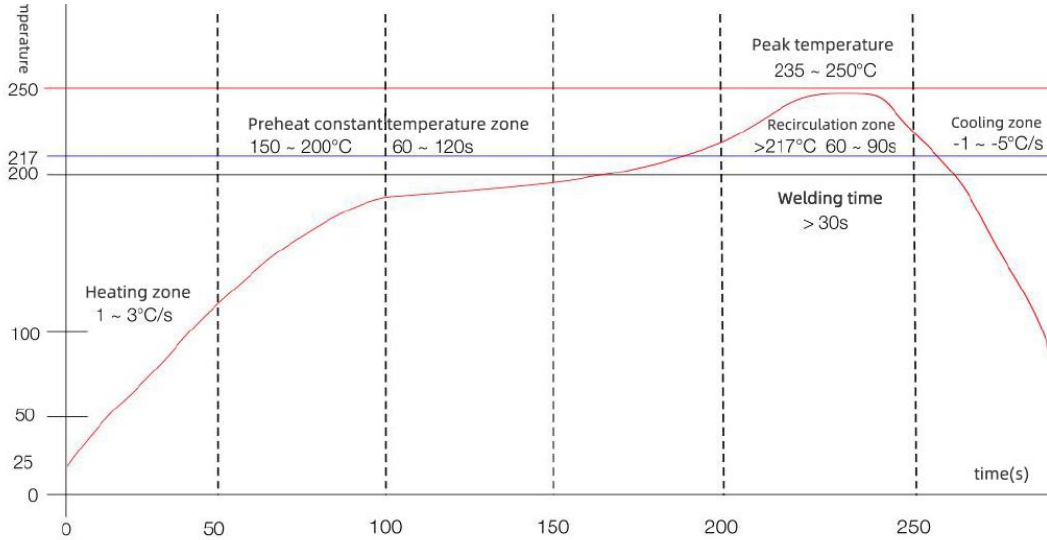

Heating zone-temperature: 25-150°C time: 60-90s Ramp rate: 1-3°C/s  
 Preheat constant temperature zone-temperature: 150-200°C time: 60-120s  
 Reflow soldering area-temperature >217°C time: 60-90s; Peak temperature: 235-250°C time: 30-70s  
 Cooling zone-temperature:Peak temperature -25-150°C Cooling slope -1--5°C/s  
 Solder-tin-silver-copper alloy lead-free solder(SAC305)

## 8. Static electricity damage warning


The RF module is a high-voltage electrostatic sensitive device. In order to prevent static electricity from damaging the module

- 1, Anti-static measures are strictly followed, and bare hands are prohibited from touching the module during the production process .
- 2, Modules should be placed in a placement area that prevents static electricity.
3. The anti-static protection circuit at the high-voltage input should be considered during product design.



## 9. Packaging information

### Mechanical dimensions (unit: mm)

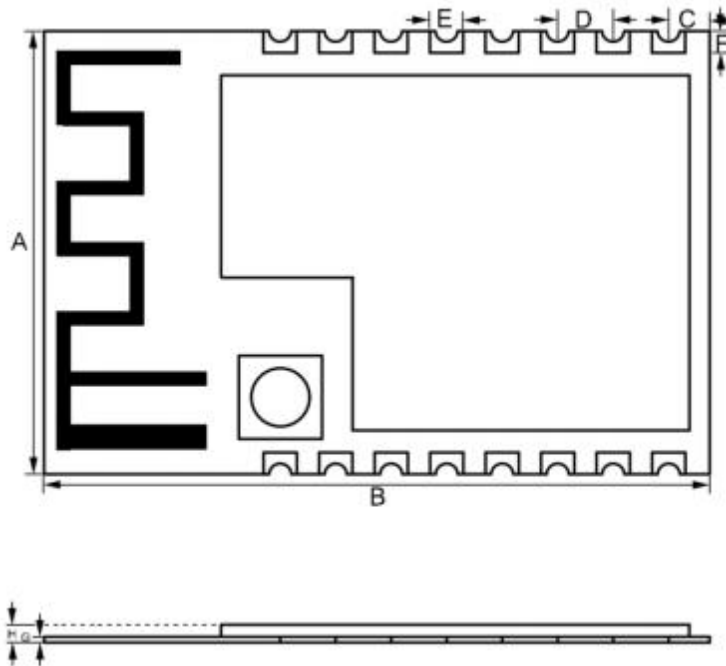

serial number	Dimensions (mm)	Error (mm)
A	16.0	$\pm 0.5$
B	24.0	$\pm 0.5$
C	1.46	$\pm 0.1$
D	2.0	$\pm 0.1$
E	1.2	$\pm 0.1$
F	0.6	$\pm 0.1$
G	1.0	$\pm 0.1$
H	2.6	$\pm 0.2$

## 10. Version update instructions

Version	update content	Updated	Maintenance man
V1.0	initial version	2021Year2moon6th	Dying

## 11. Procurement selection table

number	model	illustrate
1	VG35S2S240X0M1	Tape packaging\pallet packaging Factory default PCB Onboard antenna version

## 12. Statement

1. Due to product version upgrades or other reasons, the content of this document will be updated from time to time . Unless otherwise agreed, this document is only used as a guide.All statements, information and recommendations in do not constitute any express or implied warranty.
2. The company reserves the right of final interpretation and modification of all information provided, and any changes will be made without prior notice.

## 13. Contact us

**Company:** Shenzhen Wojin Technology Co., Ltd.

**Address:** Sanhe Road, Gaofeng Community, Dalang Street, Longhua District, Shenzhen City 1 Wisdom Cloud Valley Cbuilding 205-208

**Telephone:** 0755-23040053

**Fax:** 0755-21031236

**Official website:** [www.vollgo.com](http://www.vollgo.com)

**Business Cooperation:** [sales@vollgo.com](mailto:sales@vollgo.com)

