
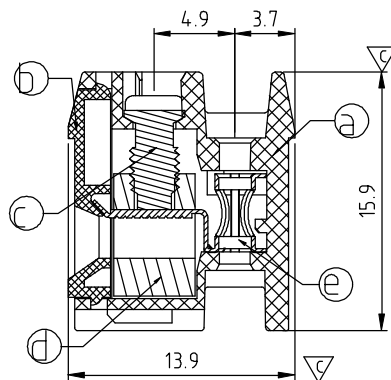
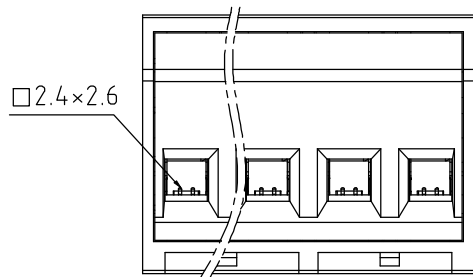
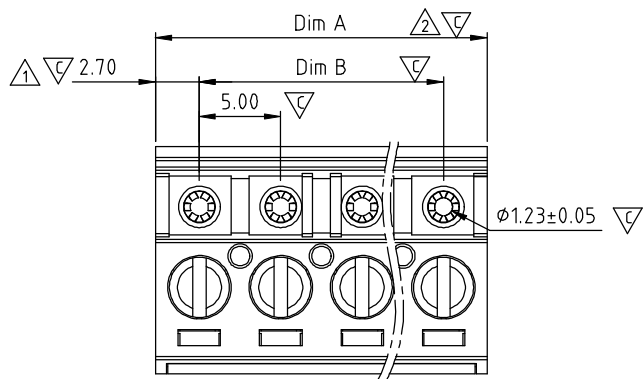


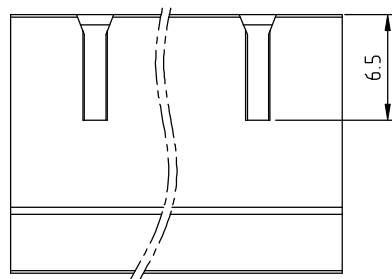

N = Number of poles
△ Dim A = N × 5.0 + 0.40
Dim B = (N - 1) × 5.0

	Dim A	Dim B
2P	±0.10	±0.10
3-6p	±0.15	±0.15
7-12p	±0.20	±0.20
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

SIGN	DATE	DESCRIPTION	APPROVER
△	09/16`13	change the dimension from 2.50 to 2.70	Chen Bo
△	09/16`13	change the dim A from N×5.0 to N×5.0+0.40	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item a Terminal housing: Thermoplastic (UL94V-0)
- Item b Terminal cover: Thermoplastic (UL94V-0)
- Item c Terminal screw: Steel Zinc plating M3
- Item d Clamp: Brass, Ni plated
- Item e Female contact: PhBz, Tin plated

Electrical

- Voltage rating: 300V
- Current rating: 15A
- Wire range:
- Solid wire (AWG): 12-28
- Stranded wire (AWG): 12-28
- Torque: 4.5 Lb-In
- Screw: M3
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: us
- The standard of withdrawal force is 200gf~550gf/pole.
It is plugged with the EX Pin of Ø1.4mm.
- Critical dimension: ∇

EO xx 01 x 2 Axxx G

Solid Block
02 2 CONTACTS
03 3 CONTACTS
...
24 24 CONTACTS

G RoHS compliant
(lead < 4%)
In copper Alloy
A000 Standard @ Logo
A00A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange (RAL2011/P)
4 Yellow (RAL1018/A)
5 Green (RAL6018/T)
6 Blue (RAL5015/A)
8 Grey (RAL7035/D)
9 White (RAL1102)
C Green (RAL6018/U)

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		EO 5.0 series 2P-24P (High type Ø1.90mm)			
PART NO.	EOxx01x2AxxxG			DWG NO.	8EO0101
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Chen Bo 09/16`13	Chen Bo 09/16`13		Tolerance
				UNIT: mm	X. ±0.50
				SCALE: NONE	X.X ±0.30
				SHEET: 01/01	X.XX ±0.10
				REV.: C	X° ±1°