

10-BIT, 8-CHANNEL, 50 KSPS to 200 KSPS, LOW POWER ANALOG-TO-DIGITAL CONVERTER

FEATURES

- Eight Input Channels
- Specified for V_A of 2.70 V to 5.25 V
- Specified Over a Range of Sample Rates
- Throughput Rate: 50 - 200 KSPS
- Zero Latency
- $\pm 0.5\text{LSB INL}, \pm 0.5\text{LSB DNL}$
- SPI/DSP/MICROWIRE/QSPI-
Compatible Serial Interface
- Low Power (typical):
 - 2.15mW (2.7V, 200KSPS)
 - 3.60mW (3.3V, 200KSPS)
- Packaged in 16-Lead TSSOP

APPLICATIONS

- Automotive Navigation
- Portable Systems
- Medical Instruments
- Mobile Communications
- Instrumentation and Control
Systems

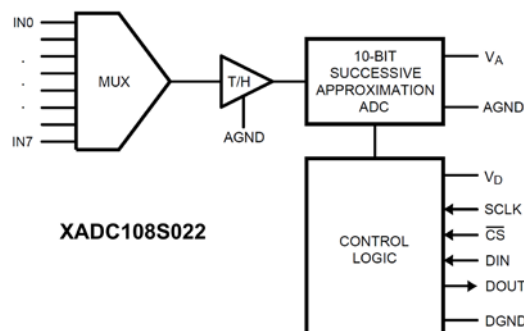


Figure 1. Functional Block Diagram

DESCRIPTION

The XADC108S022 is a low power, 8-channel 10-bit analog-to-digital converter with a high speed serial interface. Unlike the conventional practice of specifying performance at a single sample rate only, the XADC108S022 is fully specified over a sample rate range of 50 KSPS to 200 KSPS. The converter is based upon a successive-approximation register architecture with an internal track-and-hold circuit. The XADC108S022 contains eight single-ended analog inputs, IN0 through IN7. The analog input on each of these channels is from 0 to V_A .

The XADC108S022 is available in a 16-lead TSSOP package and has an operating temperature range of -40°C to 105°C .

The XADC108S022 is a drop-in replacement for the ADC108S022.

SPECIFICATIONS

At -40°C to 105°C, the following specifications apply for AGND = DGND = 0 V, $f_{\text{SAMPLE}} = 200$ KSPS and $f_{\text{SCLK}} = 3.2$ MHz, $2.70 \text{ V} \leq V_A \leq 5.25 \text{ V}$, $V_A = V_D$, unless otherwise noted.

XADC108S022

PARAMETER	TEST CONDITIONS		MIN	TYP	MAX	UNITS
SYSTEM PERFORMANCE						
Resolution				10		Bits
No missing codes				10		Bits
Integral linearity			-0.5	±0.4	0.5	LSB
Differential linearity			-0.5	±0.4	0.5	LSB
fSAMPLE Throughput rate	fSCLK = 1.6 MHz, fSCLK = 3.2 MHz 2.70 V ≤ VA ≤ 5.25 V		50		200	KSPS
SNR	fIN = 40 kHz			61		dB
THD	fIN = 40 kHz			-86		dB
IA Supply current, normal operation	CS low	fSAMPLE = 100 KSPS, fSCLK = 3.2 MHz, VA = 2.7 V	0.65		1.30	mA
		fSAMPLE =200 KSPS, fSCLK = 3.2 MHz, VA = 2.7 V	0.80		1.50	
		fSAMPLE = 100 KSPS, fSCLK = 3.2 MHz, VA = 3.3 V	1.00		2.30	
		fSAMPLE =200 KSPS, fSCLK = 3.2 MHz, VA = 3.3 V	1.10		2.50	
POWER DISSIPATION						
Normal operation	fSAMPLE = 200 KSPS, fSCLK = 3.2 MHz, VA = 2.7 V		2.15		4.10	mW
	fSAMPLE = 200 KSPS, fSCLK = 3.2 MHz, VA = 3.3 V		3.60		8.20	mW

PIN CONFIGURATION AND FUNCTION DESCRIPTIONS




Figure 2. Pin Configuration

TERMINAL		DESCRIPTION
NAME	NO.	
$\overline{CS}$	1	Chip select. On the falling edge of $\overline{CS}$, a conversion process begins.
V_A	2	Power supply pin. This voltage is also used as the reference voltage. The V_A range is from 2.70 V to 5.25 V.
AGND	3	Ground reference point for all circuitry on the XADC108S022. Both of these pins should connect to the GND plane of a system.
IN0 - IN7	4-11	Analog Input 1 through Analog Input 8. Eight single-ended analog input channels that are multiplexed into the on-chip track/hold. The analog input channel to be converted is selected by using the ADD0 through ADD2 bits of the Control Register. The input range for all input channels is 0 to V_A . Any unused input channels should be connected to GND to avoid noise pickup.
DGND	12	Ground reference point for all circuitry on the XADC108S022. Both of these pins should connect to the GND plane of a system.
V_D	13	Digital power supply. Internally connected to analog power supply V_A , analog power supply V_A = digital power supply V_D .
DIN	14	Digital data input. The XADC108S022's Control Register is loaded through this pin on rising edges of the SCLK pin.
DOUT	15	Digital data output. The output samples are clocked out of this pin on the falling edges of the SCLK pin.
SCLK	16	Digital clock input. SCLK provides the serial clock for accessing data from the part and writing serial data to the Control Register. This clock input is also used as the clock source for the XADC108S022's conversion process.

TYPICAL CONNECTION

Figure 3 shows a typical connection diagram for the XADC108S022. The 3.3 V supply should come from a stable power supply such as an LDO. The supply to XADC108S022 should be decoupled to the ground. A 1- μ F and a 0.1- μ F decoupling capacitor are required between the V_A and GND pins of the converter. This capacitor should be placed as close as possible to the pins of the device.

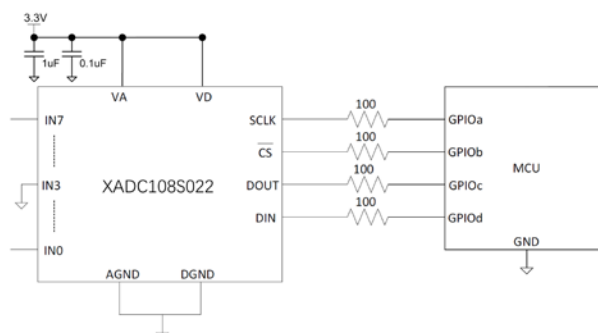


Figure 3. Typical Circuit Configuration

CONTROL REGISTER

The Control Register on the XADC108S022 is an 8-bit, write-only register. Data is loaded from the DIN pin of the XADC108S022 on the rising edge of SCLK. The data is transferred on the DIN line at the same time as the conversion result is read from the part. This requires 16 serial clocks for every data transfer. Only the information provided on the first 8 rising clock edges (after $\overline{CS}$ falling edge) is loaded to the Control Register. MSB denotes the first bit in the data stream. The bit functions are outlined in Table 1 and Table 2. The default contents of the Control Register on power-up is all zeros.

Table 1. Control Register Bits

Bit7(MSB)	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
DONTC	ZERO	ADD2	ADD1	ADD0	ONE	ZERO	ZERO

Table 2. Control Register Bit Descriptions

Bit	Mnemonic	Comment
7	DONTC	Don't care. The values of these bits do not affect the device.
6	ZERO	A zero must be written to this bit to ensure correct operation of the XADC108S022.
5	ADD2	These three bits determine which input channel is sampled and converted at the next conversion cycle.
4	ADD1	
3	ADD0	
2	ONE	A one must be written to this bit to ensure correct operation of the XADC108S022.
1, 0	ZERO	A zero must be written to this bit to ensure correct operation of the XADC108S022.

INPUT CHANNEL SELECTION

On power-up, the default selection is IN0. When returning to normal operation from tri-state, the IN selected will be the same one that was selected prior to tri-state being initiated. Table 3 below shows the multiplexer address corresponding to each analog input from IN0 to IN7 for the XADC108S022.

Table 3. Input Channel Selection

ADD2	ADD1	ADD0	Input Channel
0	0	0	IN0(Default)
0	0	1	IN1
0	1	0	IN2
0	1	1	IN3
1	0	0	IN4
1	0	1	IN5
1	1	0	IN6
1	1	1	IN7

TIMING DIAGRAM


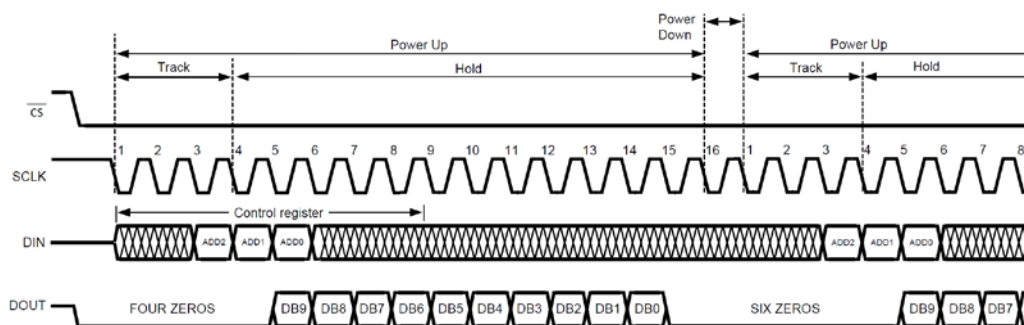


Figure 4. Timing Diagram

The conversion is initiated on the falling edge of $\overline{CS}$. The device outputs data while the conversion is in progress, and it requires 16 serial clock cycles to complete the conversion and access the full results. The XADC108S022 data word contains 4 leading zeros, followed by 10-bit data and 2 trailing zeros in MSB first format.

Once a data transfer is complete, DOUT will return to the tri-state mode, and another conversion can be initiated after the quiet time has elapsed by again bringing $\overline{CS}$ low.

OUTLINE DIMENSIONS

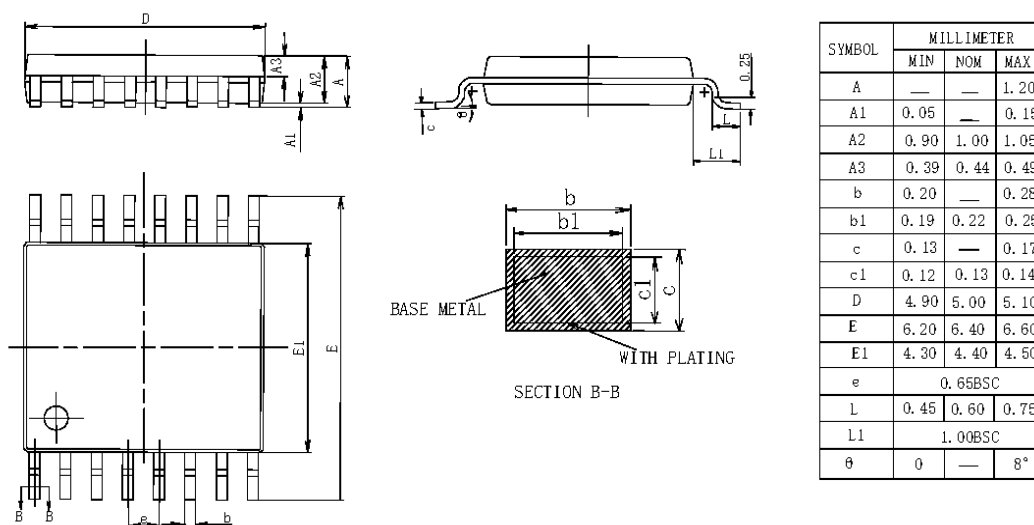

NOTES

1. Unpacked ICs, tube-mounted ICs, etc. must be stored in a drying cabinet, and the humidity in the drying cabinet < 20% R.H.
2. After access, the components are stored in an electrostatic packaging protective bag.
3. Anti-static damage: the device is an electrostatic sensitive device, and sufficient anti-static measures should be taken during transmission, assembly and testing.
4. The user should conduct a visual inspection before use, and the bottom, side and surrounding of the circuit can be welded only if it is bright. If oxidation occurs, the circuit can be processed by means of oxidation, and the circuit must be soldered within 12 hours after processing.