
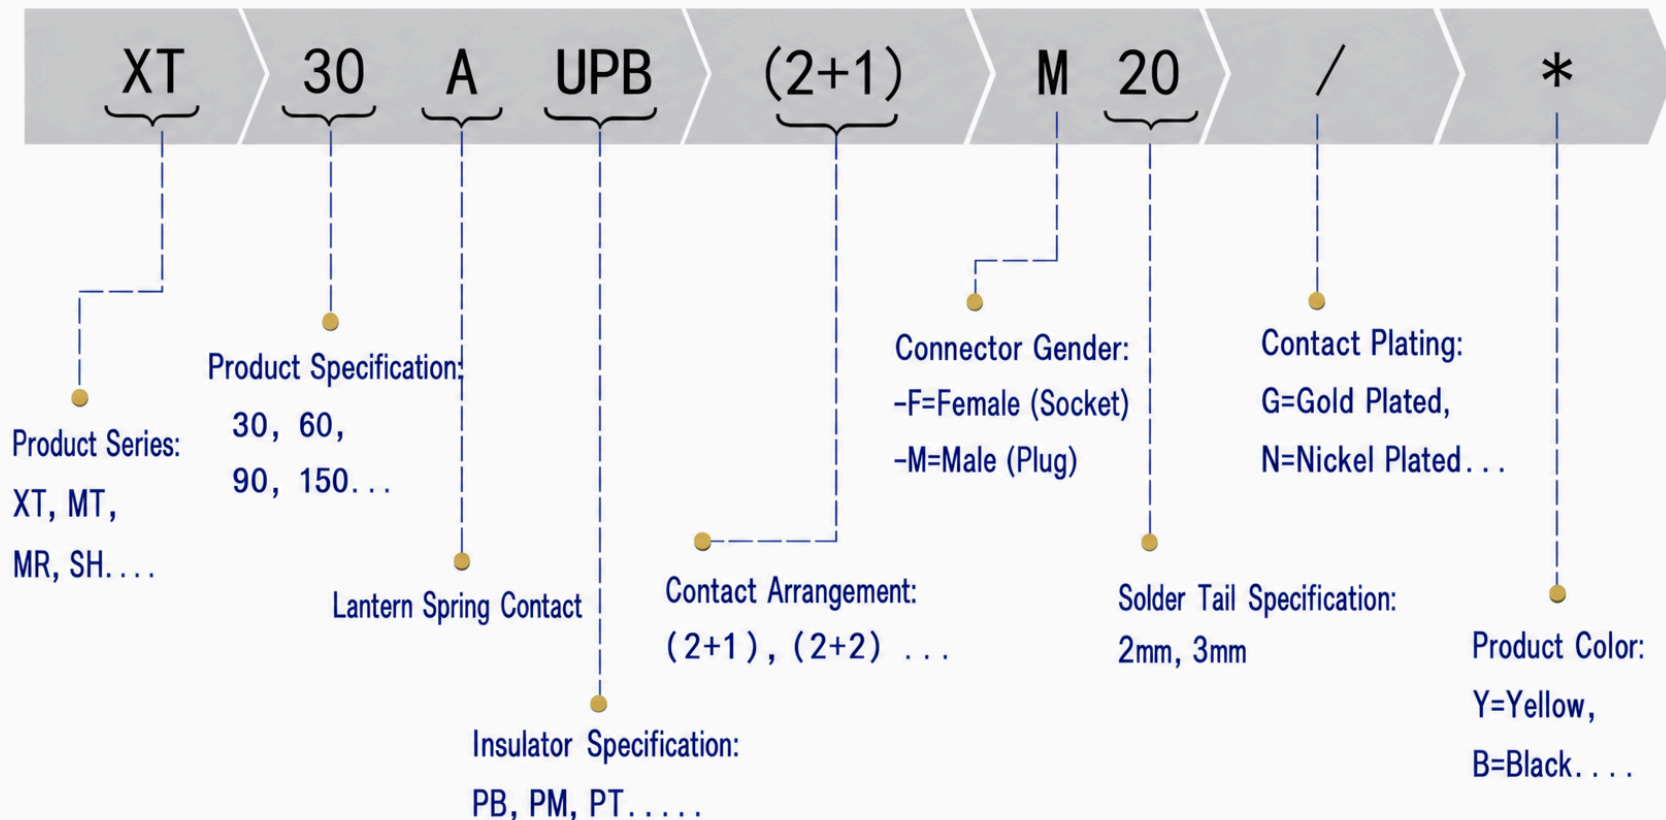
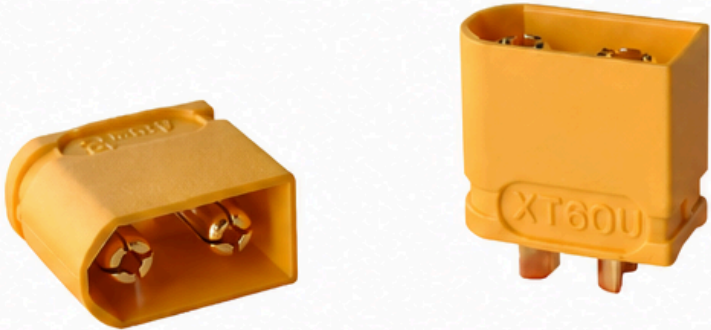


# Model Description of Amass Products

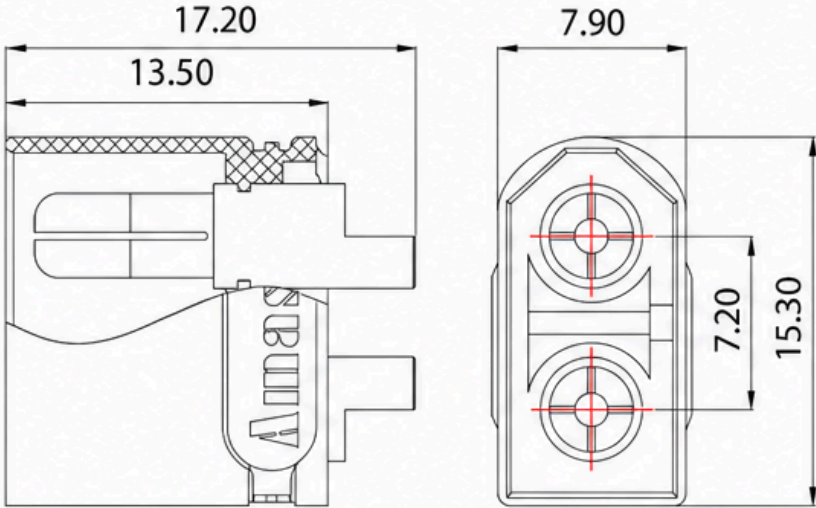

| Item No. XT60U-M                                                                    |  | Material & Parameter  |                   |                       |              |
|-------------------------------------------------------------------------------------|--|-----------------------|-------------------|-----------------------|--------------|
|    |  | Item No.              | XT60U-M           | Contact Resistance    | 0.45mΩ       |
|                                                                                     |  | Color                 | 2 3               | Rated Voltage         | DC 500V      |
|                                                                                     |  | Metal Material        | Brass Gold Plated | Rated Current         | 30A          |
| Patent No. 201530451153.3                                                           |  | Plastic Material      | PA                | Instantaneous Current | 60A          |
| Customer Drawing                                                                    |  | Flame Retardant Level | UL94 V0           | Recommended Use Times | 1000 TIMES   |
|  |  | Recommend Use         | CONTROLLER        | Wire Spec.            | 12AWG        |
|                                                                                     |  | Certification         | CE/UL             | Operating Temperature | -20℃ to 120℃ |