


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012


HRS DRAWING FOR REFERENCE

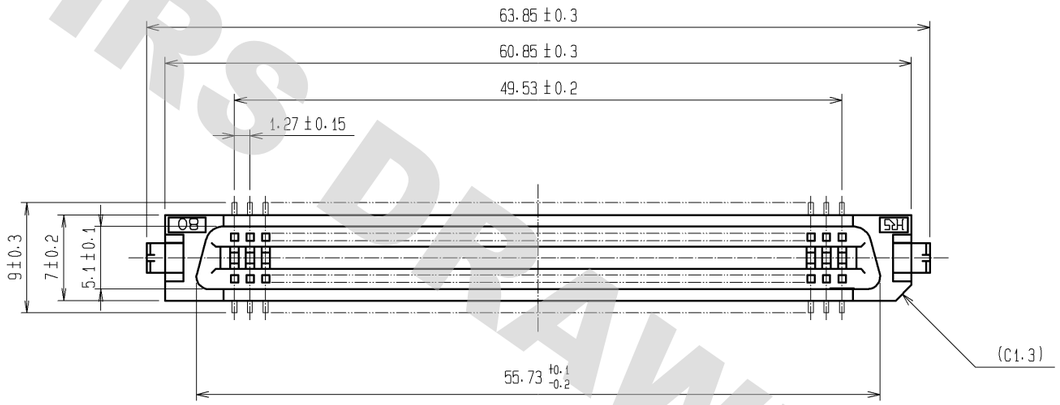


RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS:0.2mm)

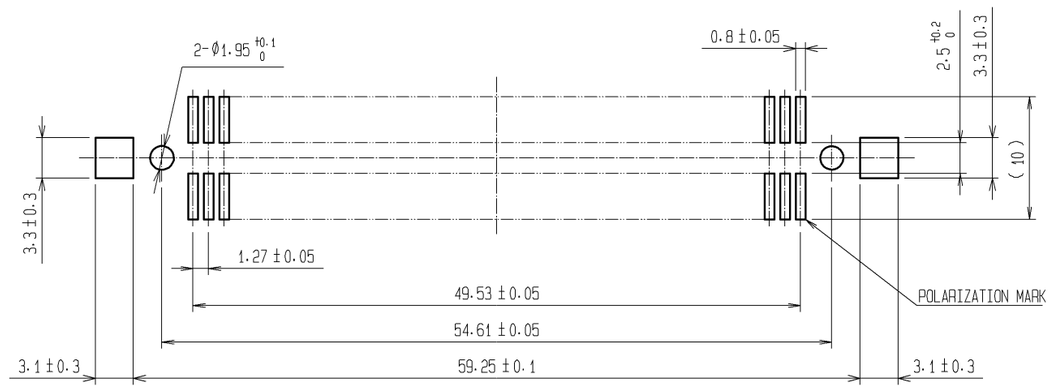

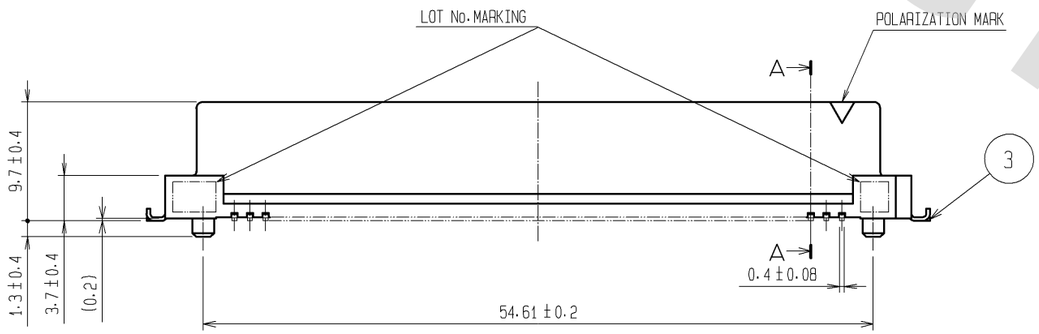




A−A



NOTE 1 LEAD CO-PLANARITY SHALL BE 0.15mm MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 TRAY PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.
4 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.

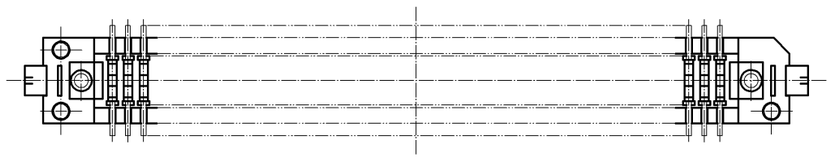

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.2μm min. LEAD AREA:TIN-PLATING 2μm min. UNDER PLATING:NICKEL 1.5μm min.	5	POLYIMIDE	(TAPE FOR VACUUM PICK-UP)
			4	PS	TRAY
1	PPS	LIGHT BROWN (UL94V-0)	3	BRASS	TIN-PLATING

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1					


HIROSE ELECTRIC CO., LTD.

APPROVED	HS. OKAWA	09.12.21
CHECKED	HT. YAMAGUCHI	09.12.21
DESIGNED	SY. KAMIGA	09.12.21
DRAWN	HK. SUNADORI	09.12.19


DRAWING NO.	EDC3-082423-02
PART NO.	FX2-80S-1.27SVL(98)
CODE NO.	CL572-2157-8-98

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

DRAWING FOR PACKING(1:2)

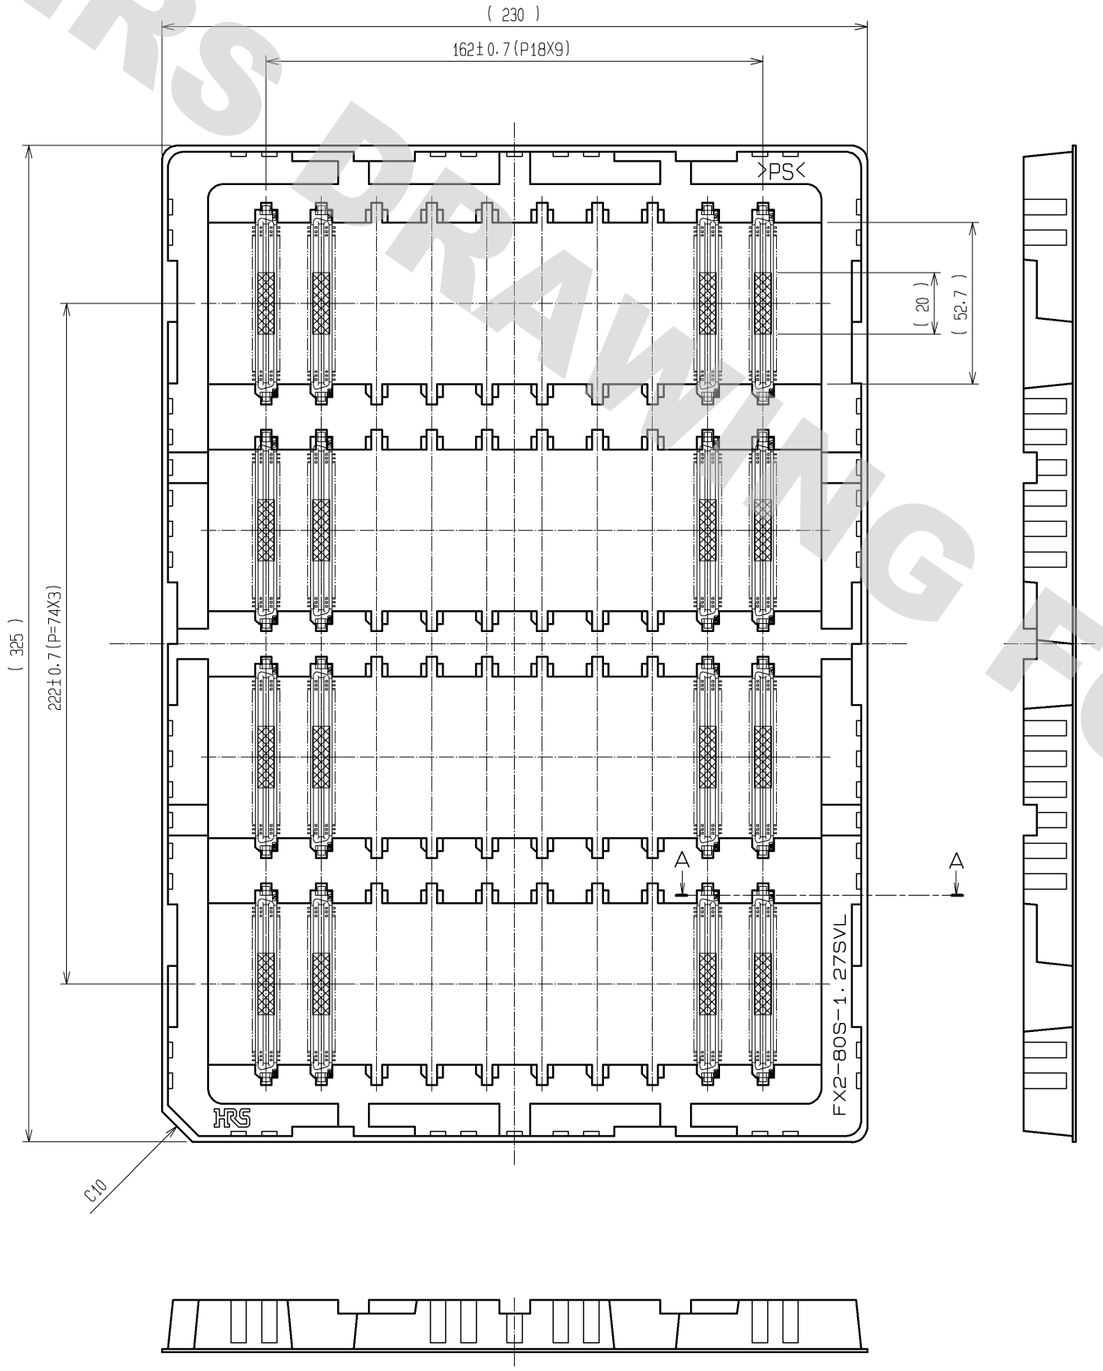

A-A(2:1)

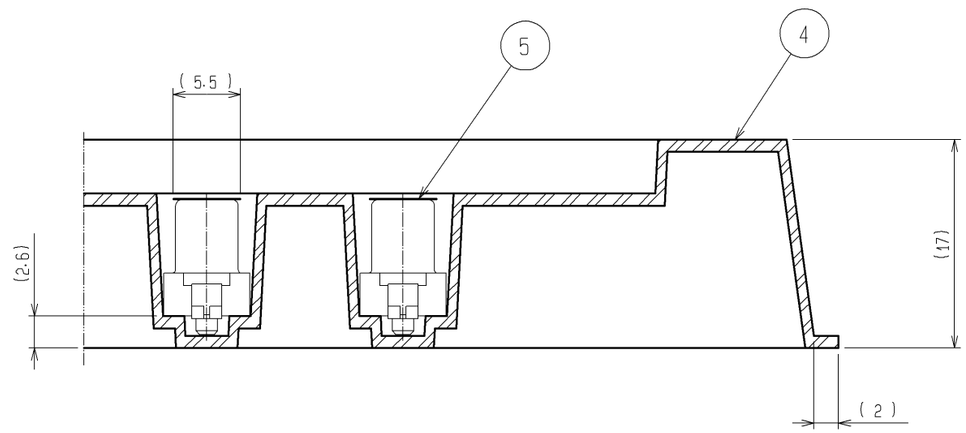

NOTE 1 1 TRAY:40 CONNECTORS
2 SETTING POSITION OF CONNECTORS IN THE TRAY SHALL BE ARRANGED IN ACCORDANCE WITH DRAWING.
3 REMOVE THE VACUUM PICK-UP TAPE AFTER MOUNTING THE CONNECTOR.
4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

HRS DRAWING FOR REFERENCE

DRAWING NO.	EDC3-082423-02
PART NO.	FX2-80S-1.27SVL(98)
CODE NO.	CL572-2157-8-98 △ 2/2