


PAGE **1/3**	ISSUE **1438C**	SERIES **SMP**	PART NUMBER **R222302702**

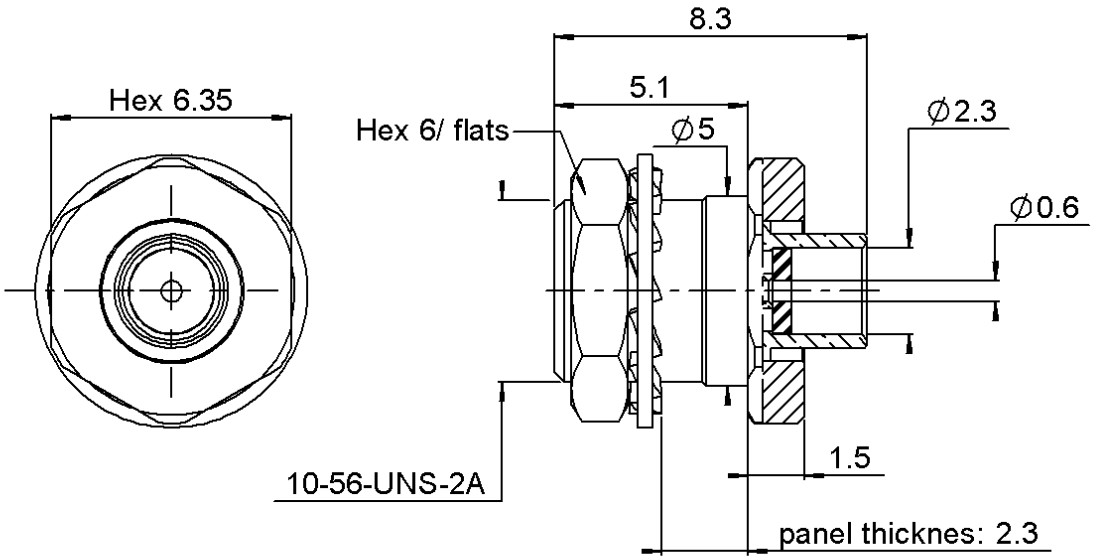





All dimensions are in mm.

PANEL CUT OUT



	mm	
	Maxi	**mini**
A	**5.30**	**5.20**





COMPONENTS	MATERIALS	PLATING (µm)
Body	**STAINLESS STEEL + BRASS**	**PASSIVATED+GOLD1.3 OVER NICKEL2**
Center contact	**BERYLLIUM COPPER**	**GOLD 1.27 OVER NICKEL 1.27**
Outer contact	**-**	**-**
Insulator	**PTFE**	
Gasket	**-**	
Others parts	**BRASS**	**NICKEL 2**
-	-	-
-	-	-

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

PACKAGING

Standard	Unit	Other
100	**Contact us**	**Contact us**

ELECTRICAL CHARACTERISTICS

Impedance		**50**	Ω
Frequency		**0-40**	GHz
VSWR	**1.50** +	**0,0000**	x F(GHz) Maxi
Insertion loss		**0.12**	√F(GHz) dB Maxi
RF leakage	- (		- F(GHz)) dB Maxi
Voltage rating		**335**	Veff Maxi
Dielectric withstanding voltage		**500**	Veff mini
Insulation resistance		**5000**	MΩ mini

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating End	**NA**	N mini
Axial force – Opposite end	**NA**	N mini
Torque	**NA**	N.cm mini
Recommended torque		
Mating	**NA**	N.cm
Panel nut	**60**	N.cm
Clamp nut	**NA**	N.cm
A/F clamp nut	**0,0000**	mm

Mating life	**1000**	Cycles mini
Weight	**1,1300**	g

ENVIRONMENTAL

Operating temperature	**-65/+165**	℃
Hermetic seal	**NA**	Atm.cm3/s
Panel leakage	**NA**	

SPECIFICATION

CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	**1,3**	**0**	**0**	**0**	**0**	**0**

Assembly instruction**:**

Recommended cable(s)

RG 405
KS 1

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	**200**	N mini
- torque	**NA**	N.cm

TOOLING


Part Number	Description	Hexagon
R282051000	STRIPPING TOOL	
R282062010	POINTER GAUGE	
R282743100	POSITIONER FOR SOLDERING SMP	
R282744254	POSITIONER FOR SOLDERING SMP	
R282862120	SOLDER GAUGE THCK 1.83	
R282740000	SOLDERING MOUNTING	

OTHER CHARACTERISTICS


RF leakage-80dB DC-3GHz
-65dB 3-26.5 GHz
Compliant with MIL-STD-348

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

COMPONENTS

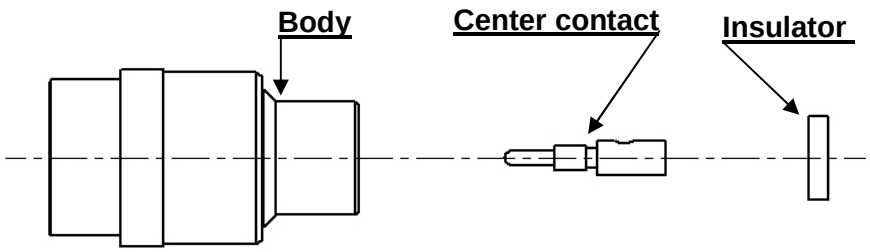


STRIPPING CABLES



We recommend a thermal preconditionning cable


1

Strip the dielectric of the cable .
Clean the cable .
Soldering 180℃
Temperature stoking do not exceded 250℃




2

Screw the positioner onto the soldering jig.
Slide the center contact onto the cable inner conductor against insulator.
Fit the cable assembly onto the soldering jig.
Insert the soldering gauge
Tighten.
Take off the soldering gauge.
and solder the contact.

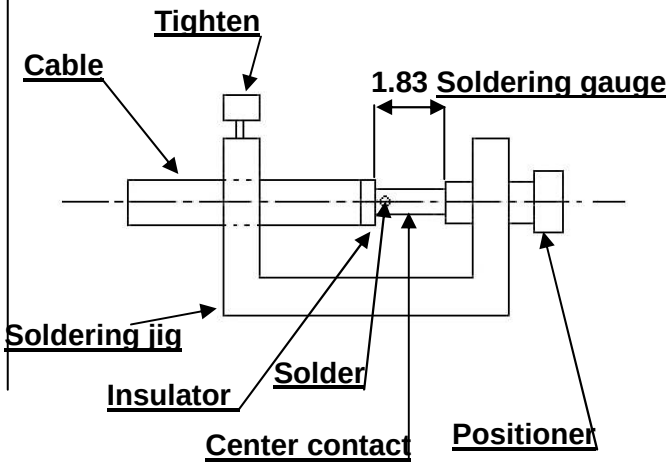

3

After cooling remove cable assembly from the jig.
Insert cable+centre contact in the connector.
Slide the positioner in the connector interface.
Slide cable into the connector body until it bottoms against.
Slide positioner into the assembly.
Tighten.
Solder the body onto the cable.
After cooling remove cable assembly from the jig.

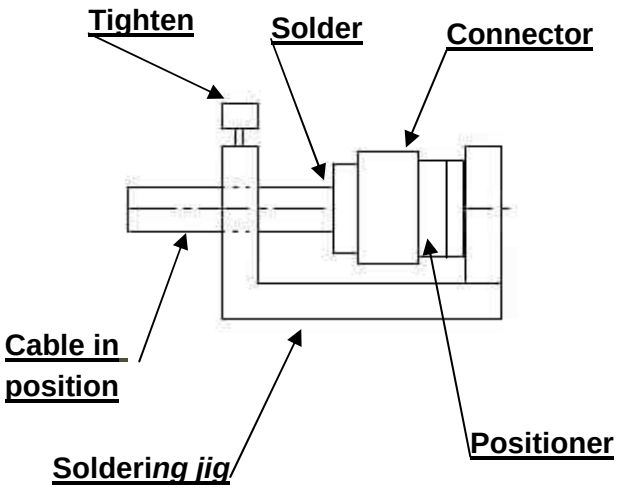

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.