FUJITSU SEMICONDUCTOR
DATA SHEET

DS07-13730-3E

16-bit Proprietary Microcontroller

CMOS

F²MC-16LX MB90340 Series

MB90F342A(S), MB90F342CA(S), MB90F343A(S), MB90F343CA(S), MB90F345A(S), MB90F345CA(S), MB90F346A(S), MB90F346CA(S), MB90F347A(S), MB90F347CA(S), MB90F349A(S), MB90F349CA(S), MB90341A(S), MB90341CA(S), MB90342A(S), MB90342CA(S), MB90346A(S), MB90346CA(S), MB90347A(S), MB90347CA(S), MB90348A(S), MB90348CA(S), MB90349A(S), MB90349CA(S), MB90V340A-101/102

■ DESCRIPTION

The MB90340-series with up to 2 FULL-CAN* interfaces and FLASH ROM is especially designed for automotive and other industrial applications. Its main feature are the on-board CAN Interfaces, which conform to V2.0 Part A and Part B, while supporting a very flexible message buffer scheme and so offering more functions than a normal full CAN approach. With the new 0.35 µm CMOS technology, Fujitsu now offers on-chip FLASH-ROM program memory up to 512 Kbytes.

The power supply (3 V) is supplied to the internal MCU core from an internal regulator circuit. This creates a major advantage in terms of EMI and power consumption.

The internal PLL clock frequency multiplier provides an internal 42 ns instruction cycle time from an external 4 MHz clock.


The unit features an 8 channel Output Compare Unit and 8 channel Input Capture Unit with 2 separate 16-bit free running timers. 4 UARTs constitute additional functionality for communication purposes.

* : Controller Area Network (CAN) - License of Robert Bosch GmbH

Note : F²MC stands for FUJITSU Flexible Microcontroller, a registered trademark of FUJITSU LIMITED.


■ PACKAGES

100-pin Plastic QFP

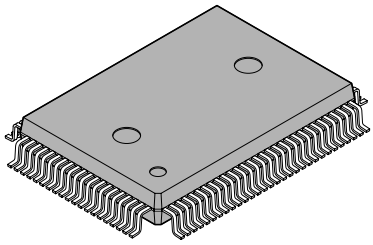

(FPT-100P-M06)

100-pin Plastic LQFP

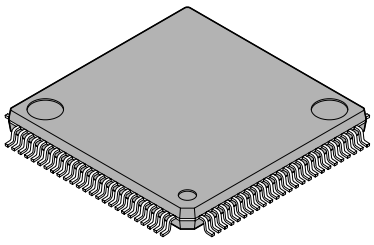

(FPT-100P-M05)

FUJITSU

■ FEATURES

- **Clock**
  - Built-in PLL clock frequency multiplication circuit
  - Selection of machine clocks (PLL clocks) is allowed among frequency division by two on oscillation clock, and multiplication of 1 to 6 times of oscillation clock (for 4 MHz oscillation clock, 4 MHz to 24 MHz).
  - Operation by sub-clock (up to 50 kHz : 100 kHz oscillation clock divided two) is allowed. (devices without S-suffix only)
  - Minimum execution time of instruction : 42 ns (when operating with 4-MHz oscillation clock, and 6-time multiplied PLL clock).
  - Built-in Clock Modulation circuit
- **16 Mbyte CPU memory space**
  - 24-bit internal addressing
- **Instruction system best suited to controller**
  - Wide choice of data types (bit, byte, word, and long word)
  - Wide choice of addressing modes(23 types)
  - Enhanced multiply-divide instructions and RETI instructions
  - Enhanced high-precision computing with 32-bit accumulator
- **Instruction system compatible with high-level language (C language) and multitask**
  - Employing system stack pointer
  - Enhanced various pointer indirect instructions
  - Barrel shift instructions
- **Increased processing speed**
  - 4-byte instruction queue
- **Powerful interrupt function**
  - Powerful 8-level, 34-condition interrupt feature
  - Up to 16 external interrupts are supported
- **Automatic data transfer function independent of CPU**
  - Expanded intelligent I/O service function (EI^{2}OS) : up to 16 channels
  - DMA : up to 16 channels
- **Low power consumption (standby) mode**
  - Sleep mode (a mode that halts CPU operating clock)
  - Main timer mode (time-base timer mode that is transfered from main clock mode)
  - PLL timer mode (time-base timer mode that is transfered from PLL clock mode)
  - Watch mode (a mode that operates sub clock and clock timer only)
  - Stop mode (a mode that stops oscillation clock and sub clock)
  - CPU blocking operation mode
- **Process**
  - CMOS technology
- **I/O port**
  - General-purpose input/output port (CMOS output)
    - 80 ports (devices without S-suffix)
    - 82 ports (devices with S-suffix)

(Continued)

(Continued)

- **Timer**
  - Time-base timer, clock timer, watchdog timer : 1 channel
  - 8/16-bit PPG timer : 8-bit X 16 channels, or 16-bit X 8 channels
  - 16-bit reload timer : 4 channels
  - 16- bit input/output timer
    - 16-bit free run timer : 2 channel (FRT0 : ICU 0/1/2/3, OCU 0/1/2/3, FRT1 : ICU 4/5/6/7, OCU 4/5/6/7)
    - 16- bit input capture: (ICU) : 8 channels
    - 16-bit output compare : (OCU) : 8 channels
- **Full-CAN interface : up to 2 channels**
  - Compliant with Ver2.0A and Ver2.0B CAN specifications
  - Flexible message buffering (mailbox and FIFO buffering can be mixed)
  - CAN wake-up function
- **UART (LIN/SCI) : up to 4 channels**
  - Equipped with full-duplex double buffer
  - Clock-asynchronous or clock-synchronous serial transmission is available
- **I^2C interface* : up to 2 channels (devices with C-suffix only)**
  - Up to 400 Kbits/s transfer rate
- **DTP/External interrupt : up to 16 channels, CAN wakeup : up to 2 channels**
  - Module for activation of expanded intelligent I/O service (EI^2OS), DMA, and generation of external interrupt.
- **Delay interrupt generator module**
  - Generates interrupt request for task switching.
- **8/10-bit A/D converter : 16/24 channels**
  - Resolution is selectable between 8-bit and 10-bit.
  - Activation by external trigger input is allowed.
  - Conversion time : 3 μs (at 24-MHz machine clock, including sampling time)
- **Program patch function**
  - Address matching detection for 6 address pointers.
- **Internal voltage regulator**
  - Supports 3 V MCU core, offering low EMI and low power consumption figures
- **Programmable input levels**
  - Automotive/CMOS-Schmitt (initial level is Automotive in Single chip mode)
  - TTL level (initial level for External bus mode)
- **FLASH memory security function**
  - Protects the content of FLASH memory (FLASH memory device only)
- **External bus interface**
- **Clock monitor function**

* : I^2C license :
Purchase of Fujitsu I^2C components conveys a license under the Philips I^2C Patent Rights to use, these components in an I^2C system provided that the system conforms to the I^2C Standard Specification as defined by Philips.

■ PRODUCT LINEUP

Part Number / Parameter	MB90F342A(S), MB90F342CA(S), MB90F343A(S)*1, MB90F343CA(S)*1, MB90F345A(S), MB90F345CA(S), MB90F346A(S), MB90F346CA(S), MB90F347A(S), MB90F347CA(S), MB90F349A(S), MB90F349CA(S), MB90341A(S)*1, MB90341CA(S)*1, MB90342A(S)*1, MB90342CA(S)*1, MB90346A(S), MB90346CA(S), MB90347A(S), MB90347CA(S), MB90348A(S)*1, MB90348CA(S)*1, MB90349A(S)*1, MB90349CA(S)*1	MB90V340A-101/102
CPU	F^2MC-16LX CPU	
System clock	On-chip PLL clock multiplier (×1, ×2, ×3, ×4, ×6, 1/2 when PLL stops) Minimum instruction execution time : 42 ns (4 MHz osc. PLL × 6)	
ROM	MASK ROM, Flash memory 512 Kbytes : MB90F345A(S), MB90F345CA(S) 384 Kbytes : MB90F343A(S), MB90F343CA(S) 256 Kbytes : MB90F342A(S), MB90F342CA(S), MB90F349A(S), MB90F349CA(S), MB90342A(S), MB90342CA(S), MB90349A(S), MB90349CA(S) 128 Kbytes : MB90F347A(S), MB90F347CA(S), MB90341A(S), MB90341CA(S),MB90348A(S), MB90348CA(S), MB90347A(S), MB90347CA(S) 64 Kbytes : MB90F346A(S), MB90F346CA(S), MB90346A(S), MB90346CA(S)	External
RAM	20 Kbytes : MB90F343A(S), MB90F343CA(S), MB90F345A(S), MB90F345CA(S) 16 Kbytes : MB90F342A(S), MB90F342CA(S), MB90F349A(S), MB90F349CA(S), MB90341A(S), MB90341CA(S), MB90342A(S), MB90342CA(S), MB90348A(S), MB90348CA(S), MB90349A(S), MB90349CA(S) 6 Kbytes : MB90F347A(S), MB90F347CA(S), MB90347A(S), MB90347CA(S) 2 Kbytes : MB90F346A(S), MB90F346CA(S), MB90346A(S), MB90346CA(S)	30 Kbytes
Emulator-specific power supply*2	—	Yes
Technology	0.35 µm CMOS with regulator for internal power supply + Flash memory with Charge pump for programming voltage	0.35 µm CMOS with regulator for internal power supply
Operating voltage range	3.5 V - 5.5 V : at normal operating (not using A/D converter) 4.0 V - 5.5 V : at using A/D converter/Flash programming 4.5 V - 5.5 V : at using external bus	5 V ± 10%
Temperature range	–40 °C to +105 °C	—
Package	QFP-100, LQFP-100	PGA-299
UART	4 channels	5 channels
	Wide range of baud rate settings using a dedicated reload timer Special synchronous options for adapting to different synchronous serial protocols LIN functionality working either as master or slave LIN device	
I^2C (400 Kbps)	devices with 'C'-suffix : 2ch devices without 'C'-suffix : —	2 channels

(Continued)

Parameter \ Part Number	MB90F342A(S), MB90F342CA(S), MB90F343A(S)*1, MB90F343CA(S)*1, MB90F345A(S), MB90F345CA(S), MB90F346A(S), MB90F346CA(S), MB90F347A(S), MB90F347CA(S), MB90F349A(S), MB90F349CA(S), MB90341A(S)*1, MB90341CA(S)*1, MB90342A(S)*1, MB90342CA(S)*1, MB90346A(S), MB90346CA(S), MB90347A(S), MB90347CA(S), MB90348A(S)*1, MB90348CA(S)*1, MB90349A(S)*1, MB90349CA(S)*1	MB90V340A-101/102
A/D Converter	devices with 'C'-suffix : 24ch devices without 'C'-suffix : 16ch	24 input channels
	10-bit or 8-bit resolution Conversion time : Min 3 µs include sample time (per one channel)	
16-bit Reload Timer (4 channels)	Operation clock frequency : fsys/2^1, fsys/2^3, fsys/2^5 (fsys = Machine clock frequency) Supports External Event Count function	
16-bit I/O Timer (2 channels)	Signals an interrupt when overflowing Supports Timer Clear when a match with Output Compare (Channel 0, 4) Operation clock freq. : fsys, fsys/2^1, fsys/2^2, fsys/2^3, fsys/2^4, fsys/2^5, fsys/2^6, fsys/2^7 (fsys = Machine clock freq.) I/O Timer 0 (clock input FRCK0) corresponds to ICU 0/1/2/3, OCU 0/1/2/3 I/O Timer 1 (clock input FRCK1) corresponds to ICU 4/5/6/7, OCU 4/5/6/7	
16-bit Output Compare (8 channels)	Signals an interrupt when 16-bit I/O Timer match output compare registers. A pair of compare registers can be used to generate an output signal.	
16-bit Input Capture (8 channels)	Rising edge, falling edge or rising & falling edge sensitive Signals an interrupt upon external event	
8/16-bit Programmable Pulse Generator (8 channels)	Supports 8-bit and 16-bit operation modes Sixteen 8-bit reload counters Sixteen 8-bit reload registers for L pulse width Sixteen 8-bit reload registers for H pulse width A pair of 8-bit reload counters can be configured as one 16-bit reload counter or as 8-bit prescaler plus 8-bit reload counter Operation clock freq. : fsys, fsys/2^1, fsys/2^2, fsys/2^3, fsys/2^4 or 128 µs@fosc = 4 MHz (fsys = Machine clock frequency, fosc = Oscillation clock frequency)	
CAN Interface	2 channels : MB90F342A(S), MB90F342CA(S), MB90F345A(S), MB90F345CA(S), MB90341A(S), MB90341CA(S), MB90342A(S), MB90342CA(S) 1 channel : MB90F346A(S), MB90F346CA(S), MB90F347A(S), MB90F347CA(S), MB90F349A(S), MB90F349CA(S), MB90346A(S), MB90346CA(S), MB90347A(S), MB90347CA(S), MB90348A(S), MB90348CA(S), MB90349A(S), MB90349CA(S)	3 channels
	Conforms to CAN Specification Version 2.0 Part A and B Automatic re-transmission in case of error Automatic transmission responding to Remote Frame Prioritized 16 message buffers for data and ID's Supports multiple messages Flexible configuration of acceptance filtering : Full bit compare/Full bit mask/Two partial bit masks Supports up to 1 Mbps	

(Continued)

(Continued)

Parameter \ Part Number	MB90F342A(S), MB90F342CA(S), MB90F343A(S)*1, MB90F343CA(S)*1, MB90F345A(S), MB90F345CA(S), MB90F346A(S), MB90F346CA(S), MB90F347A(S), MB90F347CA(S), MB90F349A(S), MB90F349CA(S), MB90341A(S)*1, MB90341CA(S)*1, MB90342A(S)*1, MB90342CA(S)*1, MB90346A(S), MB90346CA(S), MB90347A(S), MB90347CA(S), MB90348A(S)*1, MB90348CA(S)*1, MB90349A(S)*1, MB90349CA(S)*1	MB90V340A-101/102
External Interrupt (16 channels)	Can be used rising edge, falling edge, starting up by H/L level input, external interrupt, expanded inteligent I/O services (EI^{2}OS) and DMA	
D/A converter	—	2 channels
Up to100 kHz Subclock for low power operation	without subclock : devices with 'S'-suffix or MB90V340A-101 with subclock : devices without 'S'-suffix or MB90V340A-102	
I/O Ports	Virtually all external pins can be used as general purpose I/O port All push-pull outputs Bit-wise settable as input/output or peripheral signal Settable in pin-wise of 8 as CMOS schmitt trigger/ automotive inputs (default) TTL input level settable for external bus (32-pin only for external bus)	
Flash Memory	Supports automatic programming, Embedded Algorithm™*3 Write/Erase/Erase-Suspend/Resume commands A flag indicating completion of the algorithm Number of erase cycles : 10,000 times Data retention time : 20 years Boot block configuration Erase can be performed on each block Block protection with external programming voltage Flash Security Feature for protecting the content of the Flash (except for MB90F346A(S) and MB90F346CA (S))	—


*1 : These devices are under development.

*2 : It is setting of Jumper switch (TOOL VCC) when Emulator (MB2147-01) is used.
Please refer to the Emulator hardware manual about details.

*3 : Embedded Algorithm is a trade mark of Advanced Micro Devices Inc.

■ PIN ASSIGNMENTS

- MB90V340A-101/MB90V340A-102

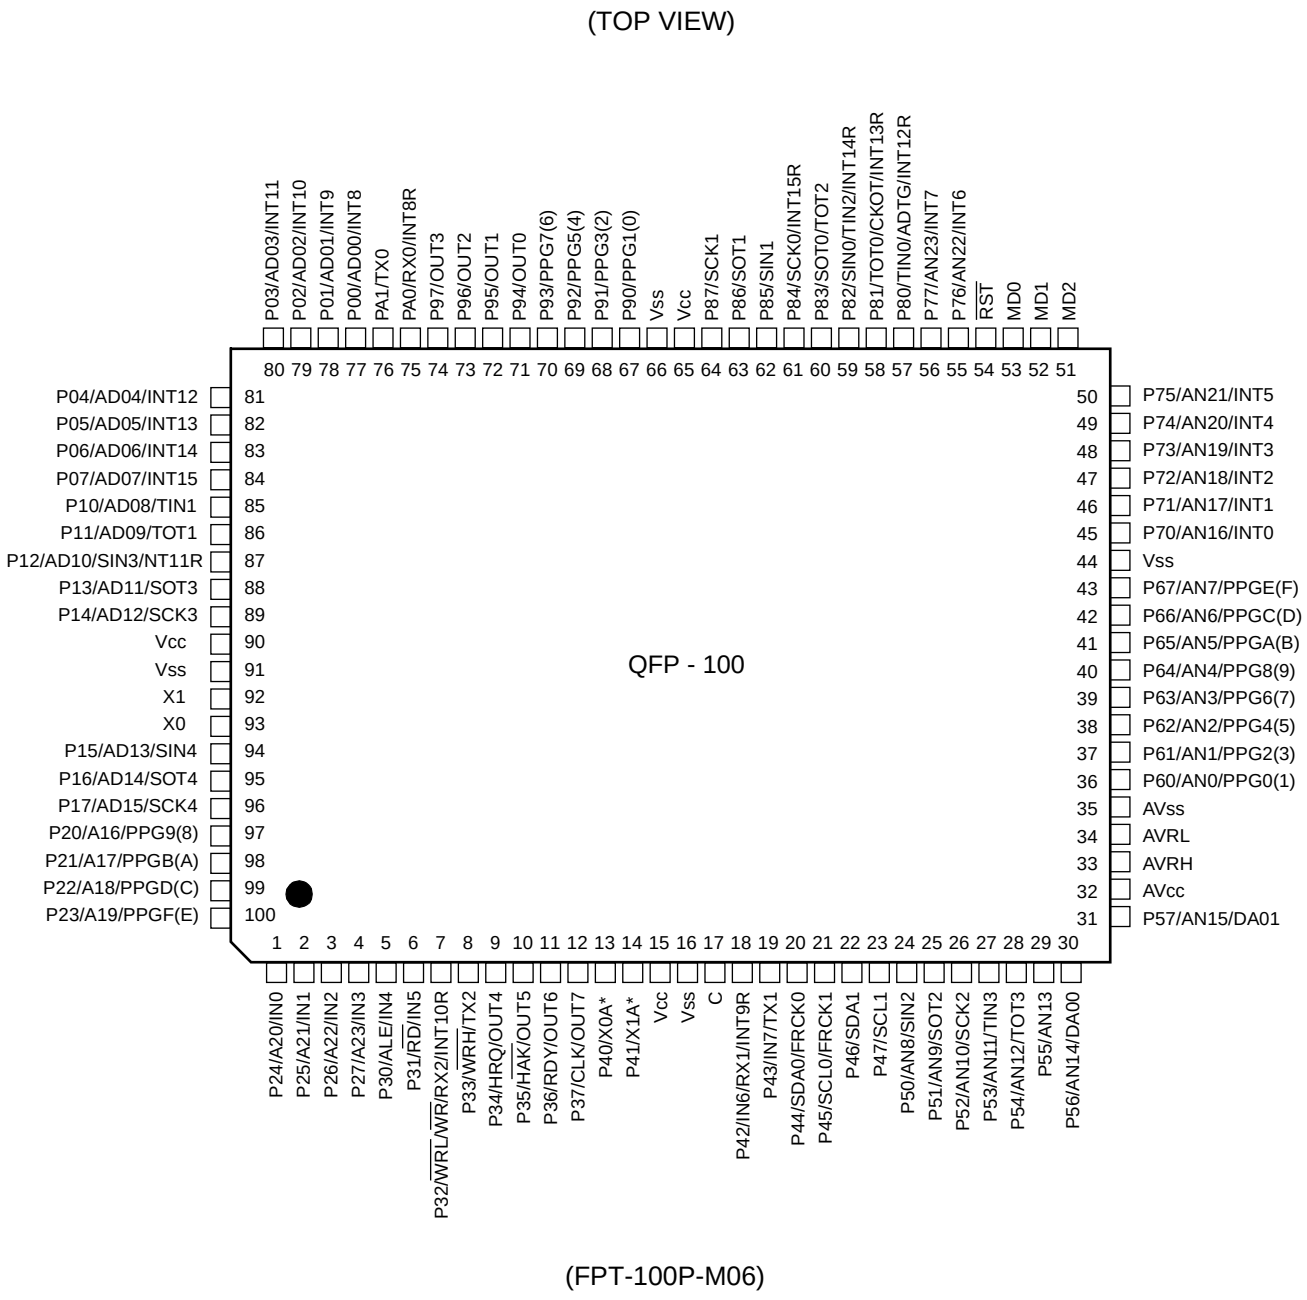


(FPT-100P-M06)

* : X0A, X1A : MB90V340A-102
P40, P41 : MB90V340A-101

(Continued)

(Continued)

(TOP VIEW)

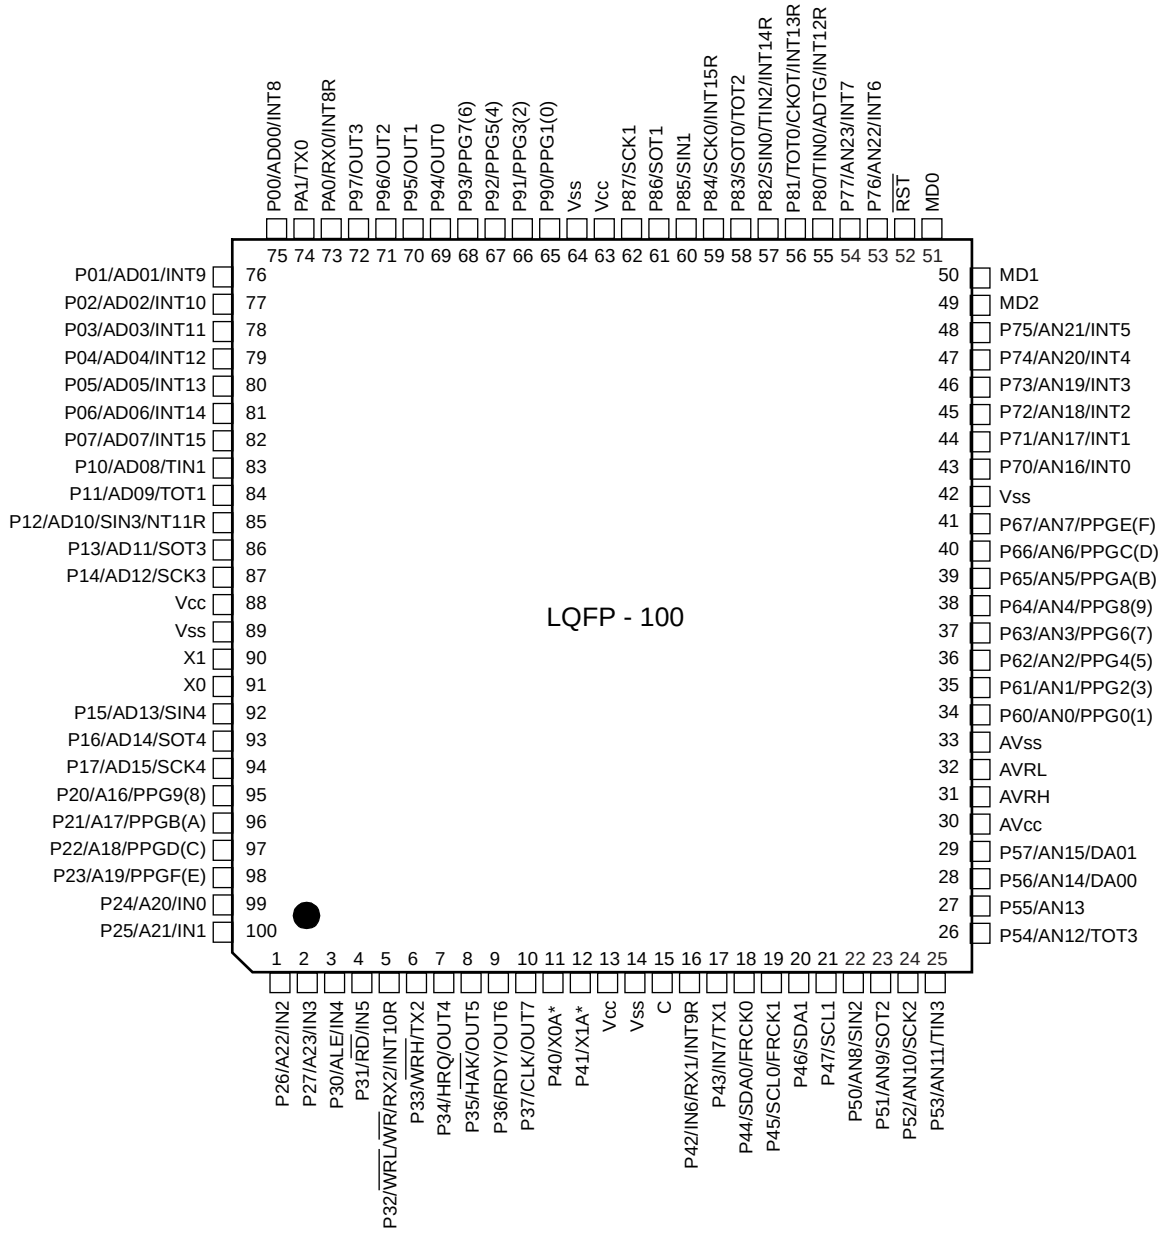


(FPT-100P-M05)

* : X0A, X1A : MB90V340A-102
P40, P41 : MB90V340A-101

- MB90F342A(S) / MB90F343A(S) / MB90F345A(S) / MB90F346A(S) / MB90F347A(S) / MB90F349A(S) / MB90341A(S) / MB90342A(S) /MB90346A(S) / MB90347A(S) / MB90348A(S) / MB90349A(S)

(TOP VIEW)

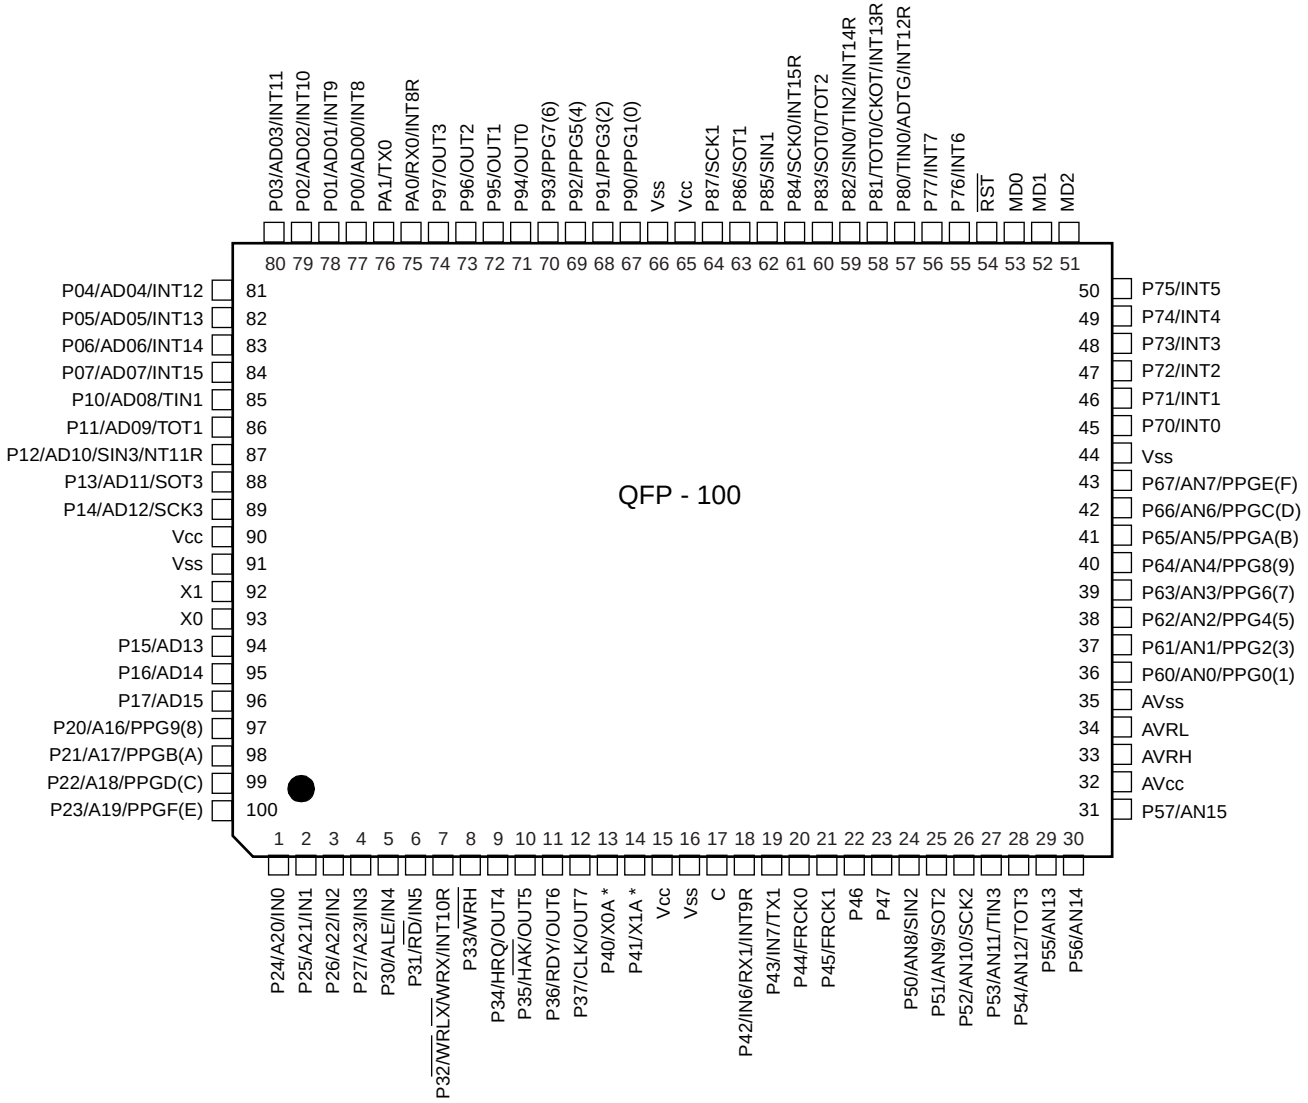


(FPT-100P-M06)

* : X0A, X1A : MB90F342A/F343A/F345A/F346A/F347A/F349A/341A/342A/346A/347A/348A/349A
MB90F342AS/F343AS/F345AS/F346AS/F347AS/F349AS
P40, P41 : MB90341AS/342AS/346AS/347AS/348AS/349AS

(Continued)

(Continued)

(TOP VIEW)

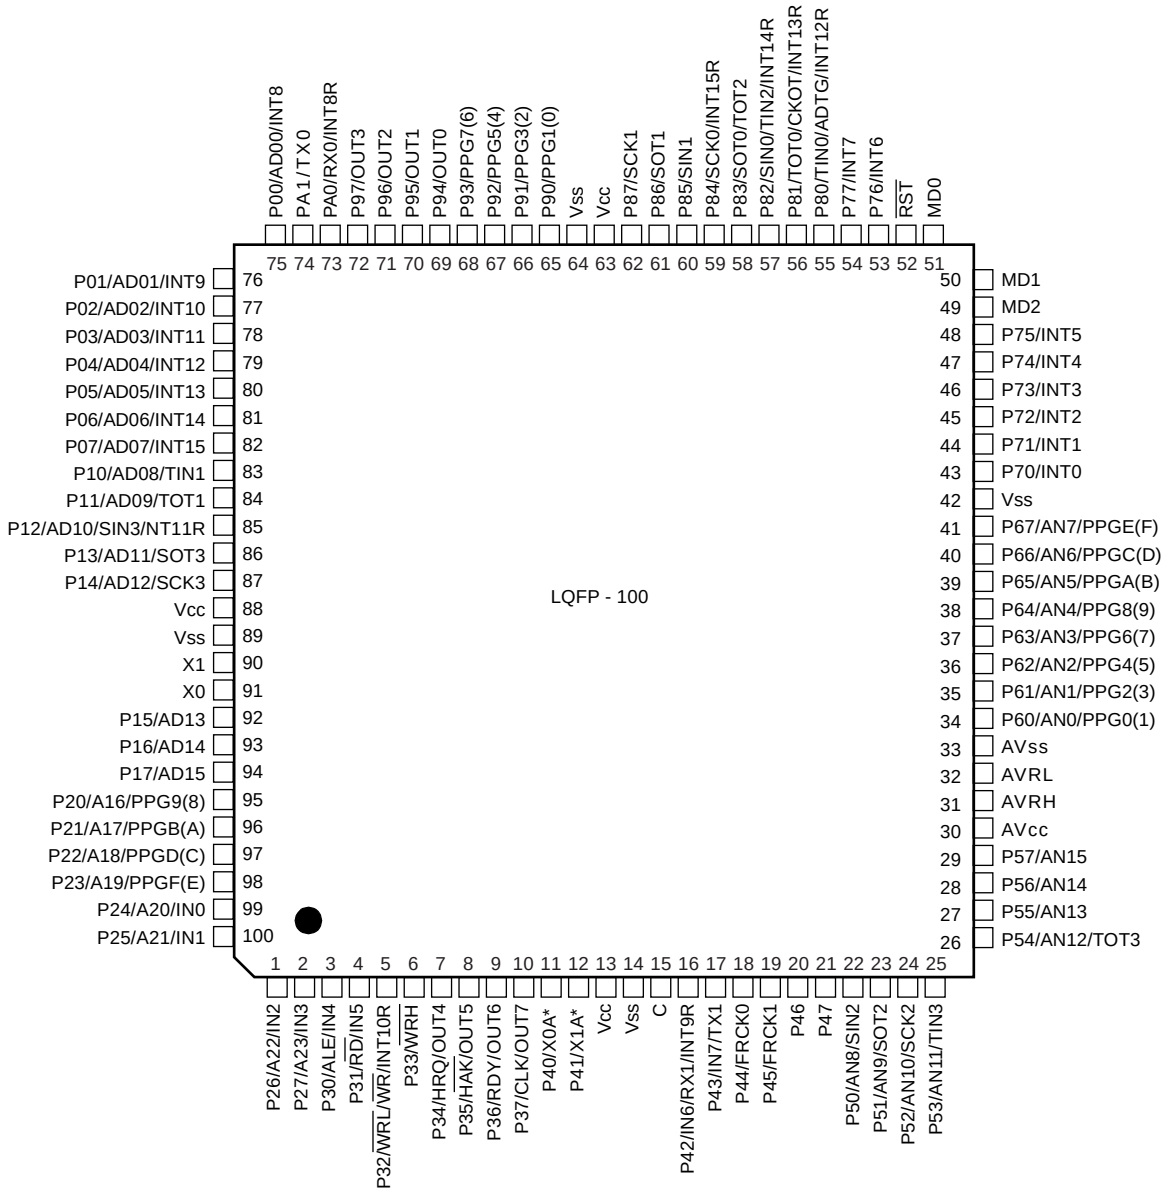


(FPT-100P-M05)

* : X0A, X1A : MB90F342A/F343A/F345A/F346A/F347A/F349A/341A/342A/346A/347A/348A/349A
MB90F342AS/F343AS/F345AS/F346AS/F347AS/F349AS

P40, P41 : MB90341AS/342AS/346AS/347AS/348AS/349AS

- MB90F342CA(S) / MB90F343CA(S) / MB90F345CA(S) / MB90F346CA(S) / MB90F347CA(S) / MB90F349CA(S) / MB90341CA(S) / MB90342CA(S) /MB90346CA(S) / MB90347CA(S) / MB90348CA(S) / MB90349CA(S)

(TOP VIEW)

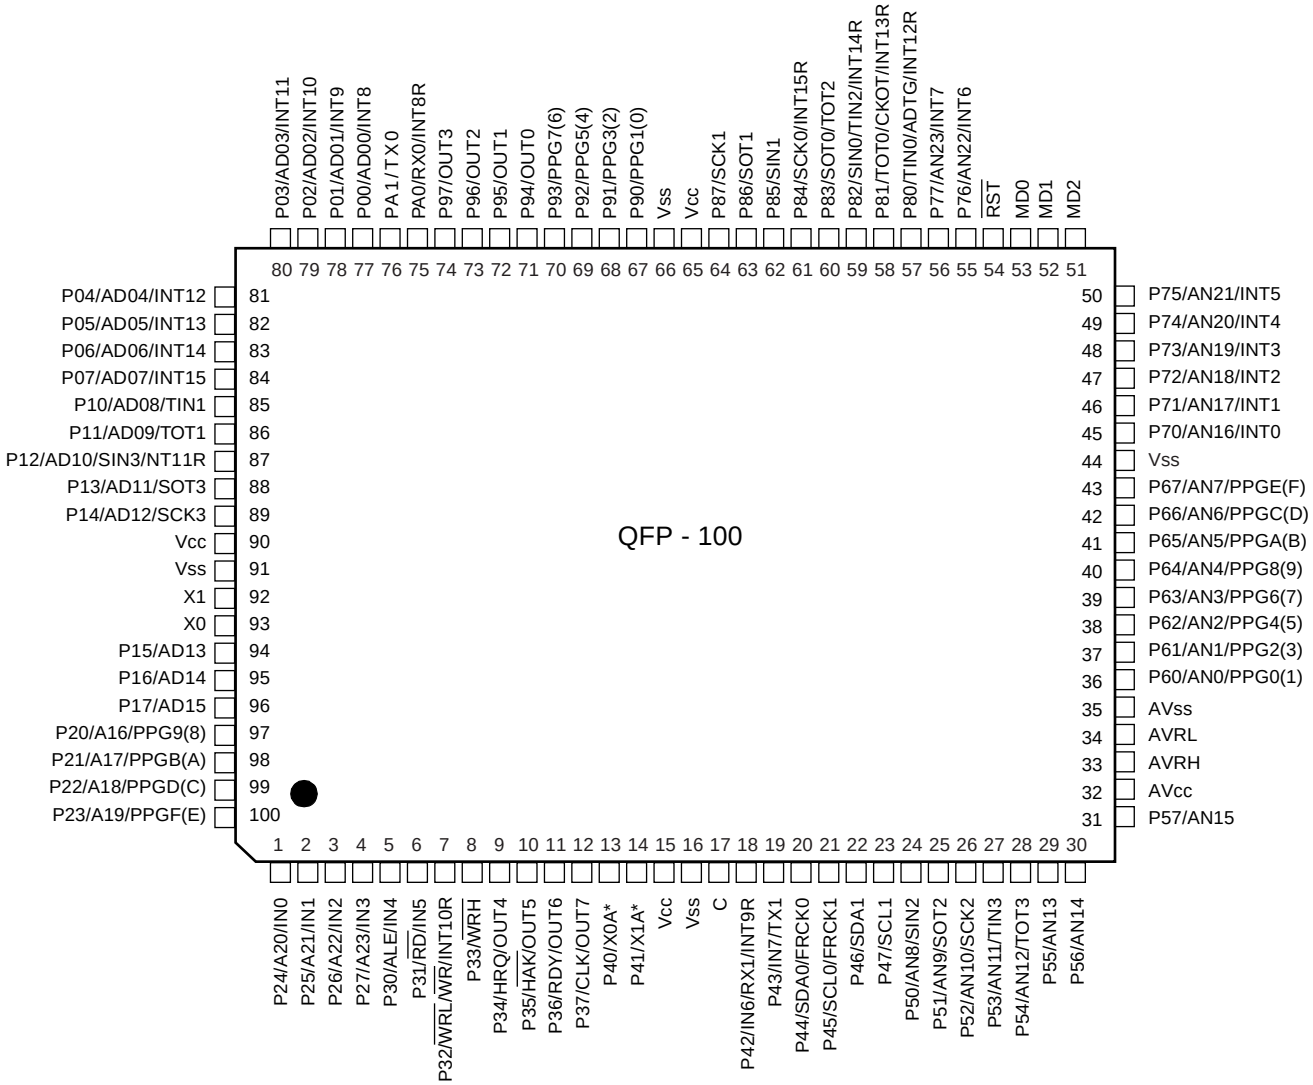


(FPT-100P-M06)

* : X0A, X1A : MB90F342CA/F343CA/F345CA/F346CA/F347CA/F349CA
MB90341CA/342CA/346CA/347CA/348CA/349CA
P40, P41 : MB90F342CAS/F343CAS/F345CAS/F346CAS/F347CAS/F349CAS
MB90341CAS/342CAS/346CAS/347CAS/348CAS/349CAS

(Continued)

(Continued)

(TOP VIEW)

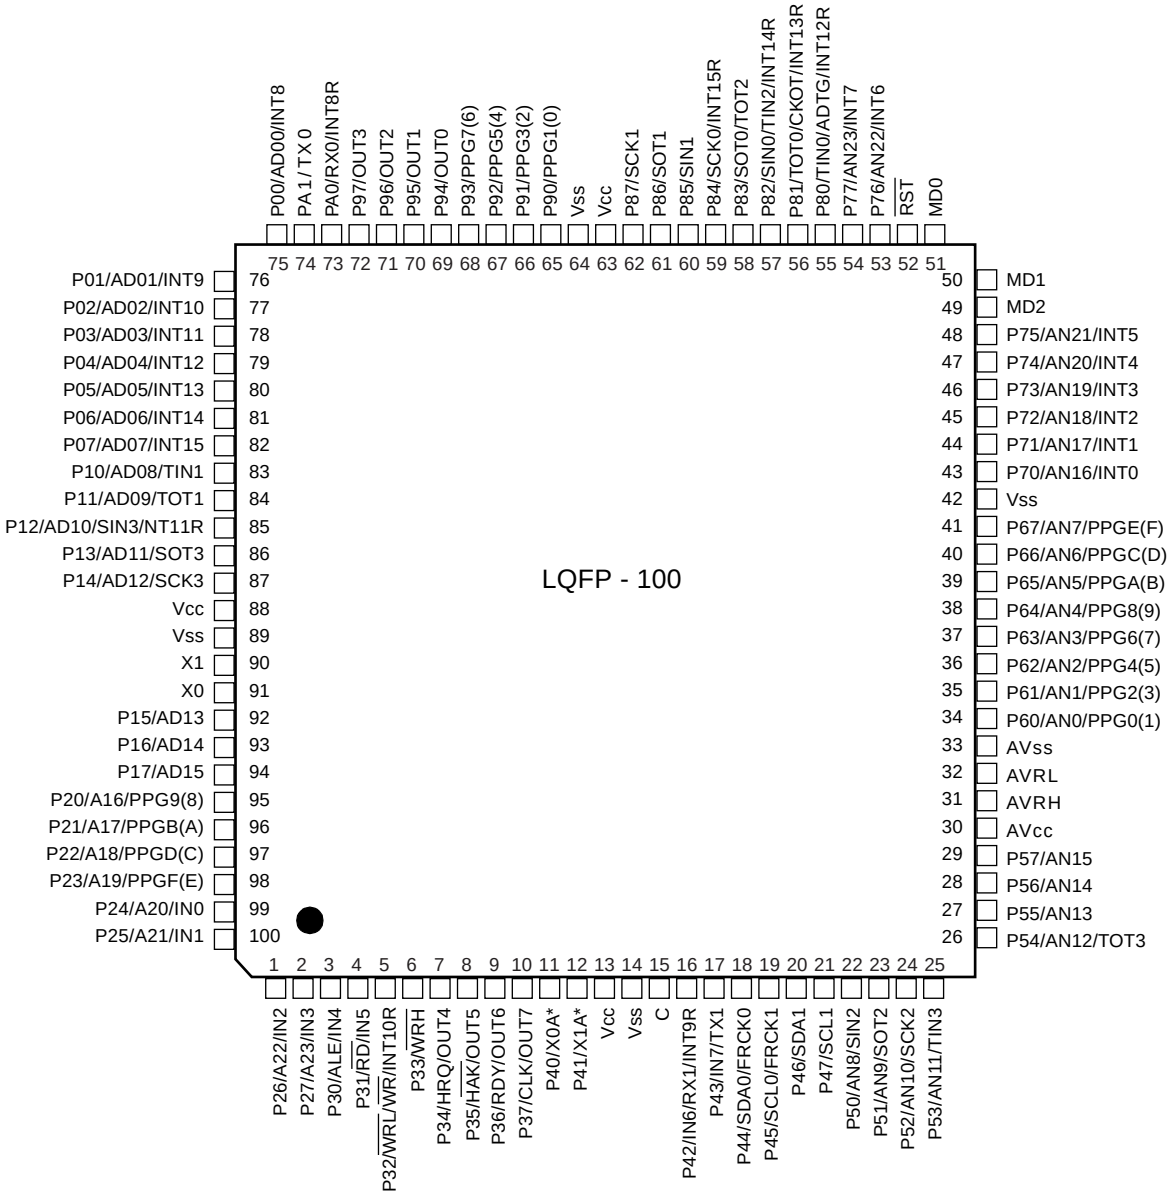

(FPT-100P-M05)

* : X0A, X1A : MB90F342CA/F343CA/F345CA/F346CA/F347CA/F349CA
MB90341CA/342CA/346CA/347CA/348CA/349CA

P40, P41 : MB90F342CAS/F343CAS/F345CAS/F346CAS/F347CAS/F349CAS
MB90341CAS/342CAS/346CAS/347CAS/348CAS/349CAS

■ PIN DESCRIPTION

Pin No.		Pin name	Circuit type	Function
LQFP100*2	QFP100*1			
90	92	X1	A	Oscillation output
91	93	X0		Oscillation input
52	54	$\overline{\text{RST}}$	E	Reset input
75 to 82	77 to 84	P00 to P07	G	General purpose I/O. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
		AD00 to AD07		I/O pins for 8 lower bits of the external address/data bus. This function is enabled when the external bus is enabled.
		INT8 to INT15		External interrupt request input pins for INT8 to INT15.
83	85	P10	G	General purpose I/O. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
		AD08		I/O pin for the external address/data bus. This function is enabled when the external bus is enabled.
		TIN1		Event input pin for the reload timer 1
84	86	P11	G	General purpose I/O. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
		AD09		I/O pin for the external address/data bus. This function is enabled when the external bus is enabled.
		TOT1		Output pin for the reload timer 1
85	87	P12	N	General purpose I/O. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
		AD10		I/O pin for the external address/data bus. This function is enabled when the external bus is enabled.
		SIN3		Serial data input pin for UART3
		INT11R		External interrupt request input pin for INT11
86	88	P13	G	General purpose I/O. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
		AD11		I/O pin for the external address/data bus. This function is enabled when the external bus is enabled.
		SOT3		Serial data output pin for UART3
87	89	P14	G	General purpose I/O. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
		AD12		I/O pin for the external address/data bus. This function is enabled when the external bus is enabled.
		SCK3		Clock I/O pin for UART3

(Continued)

Pin No.		Pin name	Circuit type	Function
LQFP100*2	QFP100*1			
92	94	P15	G	General purpose I/O. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
		AD13		I/O pin for the external address/data bus. This function is enabled when the external bus is enabled.
		SIN4		Serial data input pin for UART4 (EVA devices)
93	95	P16	G	General purpose I/O. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
		AD14		I/O pin for the external address/data bus. This function is enabled when the external bus is enabled.
		SOT4		Serial data output pin for UART4 (EVA devices)
94	96	P17	G	General purpose I/O. The register can be set to select whether to use a pull-up resistor. This function is enabled in single-chip mode.
		AD15		I/O pin for the external address/data bus. This function is enabled when the external bus is enabled.
		SCK4		Clock I/O pin for UART4 (EVA devices only)
95 to 98	97 to 100	P20 to P23	G	General purpose I/O. The register can be set to select whether to use a pull-up resistor.In external bus mode, the pin is enabled as a general-purpose I/O port when the corresponding bit in the external address output control register (HACR) is 1.
		A16 to A19		Output pins for A16 to A19 of the external address bus. When the corresponding bit in the external address output control register (HACR) is 0, the pins are enabled as high address output pins (A16 to A19).
		PPG9,PPGB, PPGD,PPGF		Output pins for PPGs
99 to 2	1 to 4	P24 to P27	G	General purpose I/O. The register can be set to select whether to use a pull-up resistor.In external bus mode, the pin is enabled as a general-purpose I/O port when the corresponding bit in the external address output control register (HACR) is 1.
		A20 to A23		Output pins for A20 to A23 of the external address bus. When the corresponding bit in the external address output control register (HACR) is 0, the pins are enabled as high address output pins (A20 to A23).
		IN0 to IN3		Data sample input pins for input captures ICU0 to ICU3
3	5	P30	G	General purpose I/O.The register can be set to select whether to use a pull-up resistor.This function is enabled in single-chip mode.
		ALE		Address latch enable output pin. This function is enabled when the external bus is enabled.
		IN4		Data sample input pin for input capture ICU4

(Continued)

Pin No.		Pin name	Circuit type	Function
LQFP100*2	QFP100*1			
4	6	P31	G	General purpose I/O.The register can be set to select whether to use a pull-up resistor.This function is enabled in single-chip mode.
		$\overline{RD}$		Read strobe output pin for the data bus. This function is enabled when the external bus is enabled.
		IN5		Data sample input pin for input capture ICU5
5	7	P32	G	General purpose I/O. The register can be set to select whether to use a pull-up resistor. This function is enabled either in single-chip mode or with the $\overline{WR}$/$\overline{WRL}$ pin output disabled.
		$\overline{WRL}$ / $\overline{WR}$		Write strobe output pin for the data bus. This function is enabled when both the external bus and the $\overline{WR}$/$\overline{WRL}$ pin output are enabled. $\overline{WRL}$ is used to write-strobe 8 lower bits of the data bus in 16-bit access while $\overline{WR}$ is used to write-strobe 8 bits of the data bus in 8-bit access.
		RX2		RX input pin for CAN2 Interface (EVA devices)
		INT10R		External interrupt request input pin for INT10
6	8	P33	G	General purpose I/O. The register can be set to select whether to use a pull-up resistor.This function is enabled either in single-chip mode or with the $\overline{WRH}$ pin output disabled.
		$\overline{WRH}$		Write strobe output pin for the 8 higher bits of the data bus. This function is enabled when the external bus is enabled, when the external bus 16-bit mode is selected, and when the WRH output pin is enabled.
		TX2		TX Output pin for CAN2 (EVA devices)
7	9	P34	G	General purpose I/O. The register can be set to select whether to use a pull-up resistor. This function is enabled either in single-chip mode or with the hold function disabled.
		HRQ		Hold request input pin. This function is enabled when both the external bus and the hold function are enabled.
		OUT4		Waveform output pin for output compare OCU4
8	10	P35	G	General purpose I/O. The register can be set to select whether to use a pull-up resistor. This function is enabled either in single-chip mode or with the hold function disabled.
		$\overline{HAK}$		Hold acknowledge output pin. This function is enabled when both the external bus and the hold function are enabled.
		OUT5		Waveform output pin for output compare OCU6
9	11	P36	G	General purpose I/O. The register can be set to select whether to use a pull-up resistor. This function is enabled either in single-chip mode or with the external ready function disabled.
		RDY		Ready input pin. This function is enabled when both the external bus and the external ready function are enabled.
		OUT6		Waveform output pin for output compare OCU5

(Continued)

Pin No.		Pin name	Circuit type	Function
LQFP100*2	QFP100*1			
10	12	P37	G	General purpose I/O. The register can be set to select whether to use a pull-up resistor. This function is enabled either in single-chip mode or with the CLK output disabled.
		CLK		CLK output pin. This function is enabled when both the external bus and CLK output are enabled.
		OUT7		Waveform output pin for output compare OCU7
11, 12	13, 14	P40, P41	F	General purpose I/O (devices with S-suffix or MB90V340A-101)
		X0A , X1A	B	Oscillator input pins for sub-clock (devices without S-suffix or MB90V340A-102)
16	18	P42	F	General purpose I/O
		IN6		Data sample input pin for input capture ICU6
		RX1		RX input pin for CAN1 Interface (MB90F342A/F343A/F345A/341A/342A only)
		INT9R		External interrupt request input pin for INT9
17	19	P43	F	General purpose I/O
		IN7		Data sample input pin for input capture ICU7
		TX1		TX Output pin for CAN1 (MB90F342A/F343A/F345A/341A/342A only)
18	20	P44	H	General purpose I/O
		SDA0		Serial data I/O pin for I^2C 0 (devices with C-suffix)
		FRCK0		Input for the 16-bit I/O Timer 0
19	21	P45	H	General purpose I/O
		SCL0		Serial clock I/O pin for I^2C 0 (devices with C-suffix)
		FRCK1		Input for the 16-bit I/O Timer 1
20	22	P46	H	General purpose I/O
		SDA1		Serial data I/O pin for I^2C 1 (devices with C-suffix)
21	23	P47	H	General purpose I/O
		SCL1		Serial clock I/O pin for I^2C 1 (devices with C-suffix)
22	24	P50	O	General purpose I/O
		AN8		Analog input pin for the A/D converter
		SIN2		Serial data input pin for UART2
23	25	P51	I	General purpose I/O
		AN9		Analog input pin for the A/D converter
		SOT2		Serial data output pin for UART2
24	26	P52	I	General purpose I/O
		AN10		Analog input pin for the A/D converter
		SCK2		Clock I/O pin for UART2

(Continued)

Pin No.		Pin name	Circuit type	Function
LQFP100*2	QFP100*1			
25	27	P53	I	General purpose I/O
		AN11		Analog input pin for the A/D converter
		TIN3		Event input pin for the reload timers 3
26	28	P54	I	General purpose I/O
		AN12		Analog input pin for the A/D converter
		TOT3		Output pin for the reload timer 3
27	29	P55	I	General purpose I/O
		AN13		Analog input pin for the A/D converter
28, 29	30, 31	P56 to P57	J	General purpose I/O
		AN14 to AN15		Analog input pin for the A/D converter
		DA00 to DA01		D/A converter analog output pins (MB90V340 only)
34 to 41	36 to 43	P60 to P67	I	General purpose I/O
		AN0 to AN7		Analog input pins for the A/D converter
		PPG0, 2, 4, 6, 8, A, C, E		Output pins for PPGs
43 to 48, 53, 54	45 to 50, 55, 56	P70 to P77	I	General purpose I/O
		AN16 to AN23		Analog input pins for the A/D converter (devices with C-suffix)
		INT0 to INT7		External interrupt request input pins for INT0 to INT7
55	57	P80	F	General purpose I/O
		TIN0		Event input pin for the reload timers 0
		ADTG		Trigger input pin for the A/D converter
		INT12R		External interrupt request input pin for INT12
56	58	P81	F	General purpose I/O
		TOT0		Output pin for the reload timer 0
		CKOT		Output pin for the clock monitor
		INT13R		External interrupt request input pin for INT13
57	59	P82	M	General purpose I/O
		SIN0		Serial data input pin for UART0
		TIN2		Event input pin for the reload timers 2
		INT14R		External interrupt request input pin for INT14
58	60	P83	F	General purpose I/O
		SOT0		Serial data output pin for UART0
		TOT2		Output pin for the reload timer 2
59	61	P84	F	General purpose I/O
		SCK0		Clock I/O pin for UART0
		INT15R		External interrupt request input pin for INT15

(Continued)






(Continued)

Pin No.		Pin name	Circuit type	Function
LQFP100*2	QFP100*1			
60	62	P85	M	General purpose I/O
		SIN1		Serial data input pin for UART1
61	63	P86	F	General purpose I/O
		SOT1		Serial data output pin for UART1
62	64	P87	F	General purpose I/O
		SCK1		Clock I/O pin for UART1
65 to 68	67 to 70	P90 to P93	F	General purpose I/O
		PPG1, 3, 5, 7		Output pins for PPGs
69 to 72	71 to 74	P94 to P97	F	General purpose I/O
		OUT0 to OUT3		Waveform output pins for output compares OCU0 to OCU3. This function is enabled when the OCU enables waveform output.
73	75	PA0	F	General purpose I/O
		RX0		RX input pin for CAN0 Interface
		INT8R		External interrupt request input pin for INT8
74	76	PA1	F	General purpose I/O
		TX0		TX Output pin for CAN0
30	32	AV_{CC}	K	Vcc power input pin for analog circuits
31	33	AVRH	L	Reference voltage input for the A/D Converter. This power supply must be turned on or off while a voltage higher than or equal to AVRH is applied to AV_{CC}.
32	34	AVRL	K	Lower reference voltage input for the A/D Converter
33	35	AV_{SS}	K	Vss power input pin for analog circuits
50, 51	52, 53	MD1, MD0	C	Input pins for specifying the operating mode.
49	51	MD2	D	Input pin for specifying the operating mode.
13 63 88	15 65 90	V_{CC}	—	Power (3.5 V to 5.5 V) input pins
14 42 64 89	16 44 66 91	V_{SS}	—	Power (0V) input pins
15	17	C	K	This is the power supply stabilization capacitor pin. It should be connected to a higher than or equal to 0.1 µF ceramic capacitor.




*1 : FPT-100P-M06

*2 : FPT-100P-M05





■ I/O CIRCUIT TYPE

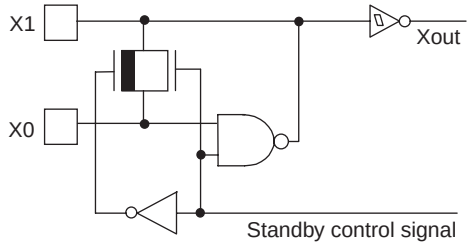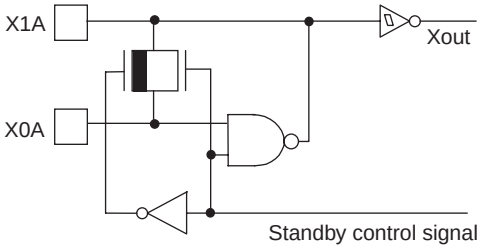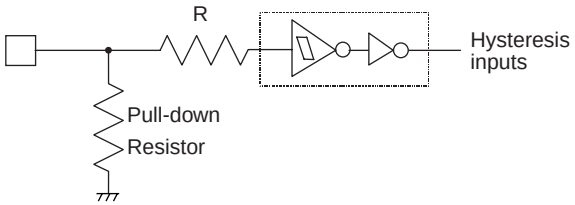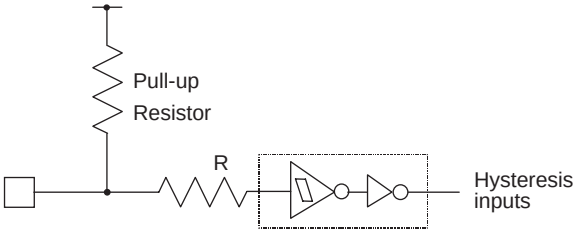Type	Circuit	Remarks
A		Oscillation circuit • High-speed oscillation feedback resistor = approx. 1 MΩ
B		Oscillation circuit • Low-speed oscillation feedback resistor = approx. 10 MΩ
C		Mask ROM and EVA device: • CMOS Hysteresis input pin Flash device: • CMOS input pin
D		Mask ROM and EVA device: • CMOS Hysteresis input pin • Pull-down resistor valule: approx. 50 kΩ Flash device: • CMOS input pin • No Pull-down
E		CMOS Hysteresis input pin • Pull-up resistor valule: approx. 50 kΩ

(Continued)

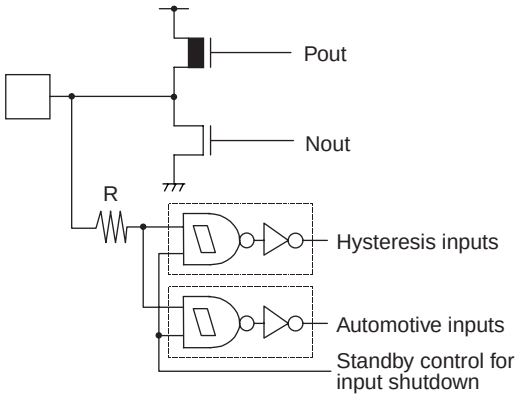
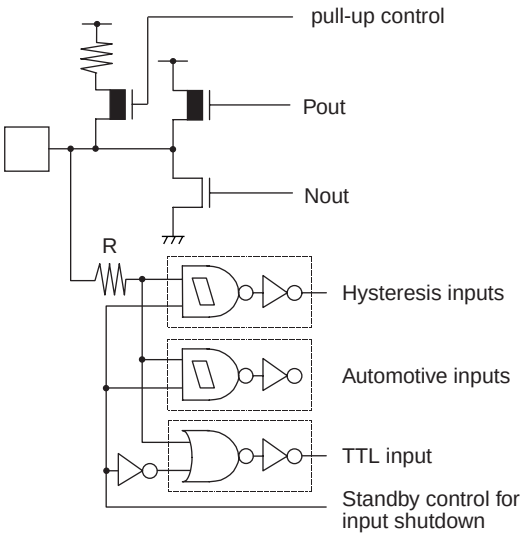
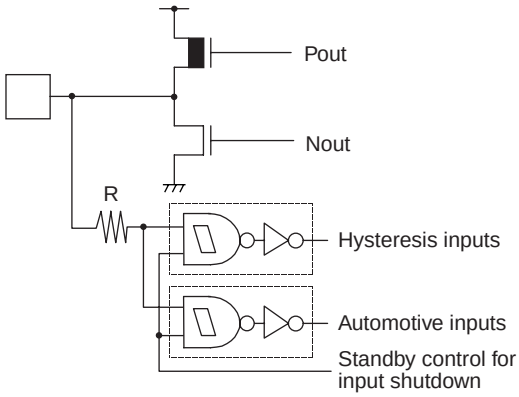
Type	Circuit	Remarks
F		• CMOS level output (I_{OL} = 4 mA, I_{OH} = –4 mA) • CMOS hysteresis inputs (With the standby-time input shutdown function) • Automotive input (With the standby-time input shutdown function)
G		• CMOS level output (I_{OL} = 4 mA, I_{OH} = –4 mA) • CMOS hysteresis inputs (With the standby-time input shutdown function) • Automotive input (With the standby-time input shutdown function) • TTL input (With the standby-time input shutdown function) • Programmalble pullup resistor: 50 kΩ approx.
H		• CMOS level output (I_{OL} = 3 mA, I_{OH} = –3 mA) • CMOS hysteresis inputs (With the standby-time input shutdown function) • Automotive input (With the standby-time input shutdown function)

(Continued)

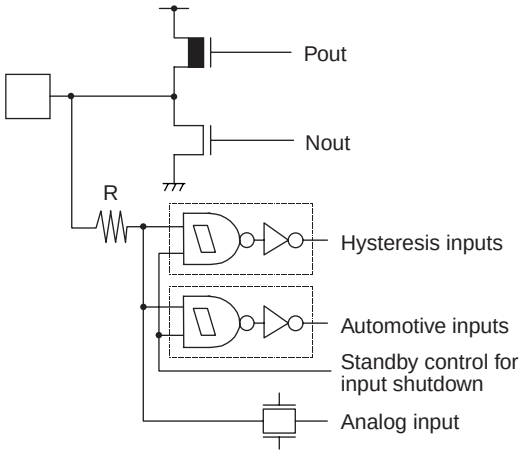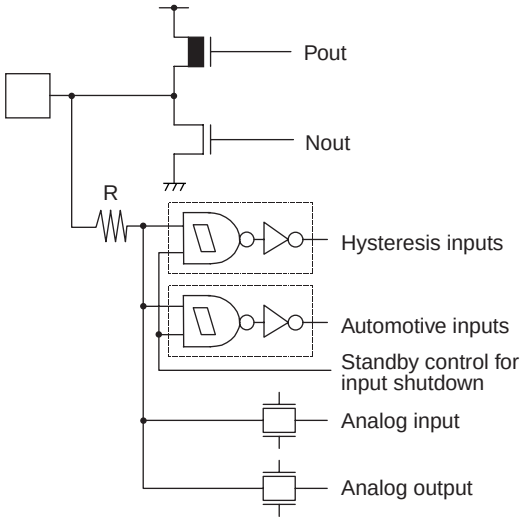Type	Circuit	Remarks
I		• CMOS level output (I_{OL} = 4 mA, I_{OH} = –4 mA) • CMOS hysteresis inputs (With the standby-time input shutdown function) • Automotive input (With the standby-time input shutdown function) • A/D analog input
J		• CMOS level output (I_{OL} = 4 mA, I_{OH} = –4 mA) • D/A analg output • CMOS hysteresis inputs (With the standby-time input shutdown function) • Automotive input (With the standby-time input shutdown function) • A/D analog input
K		• Power supply input protection circuit
L		• A/D converter reference voltage power supply input pin, with the protection circuit • Flash devices do not have a protection circuit against V_{CC} for pin AVRH

(Continued)

(Continued)

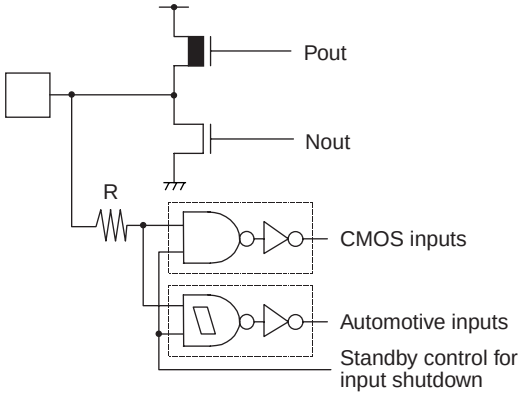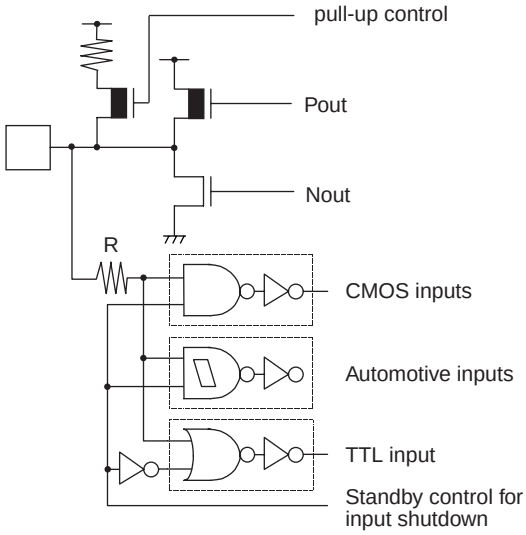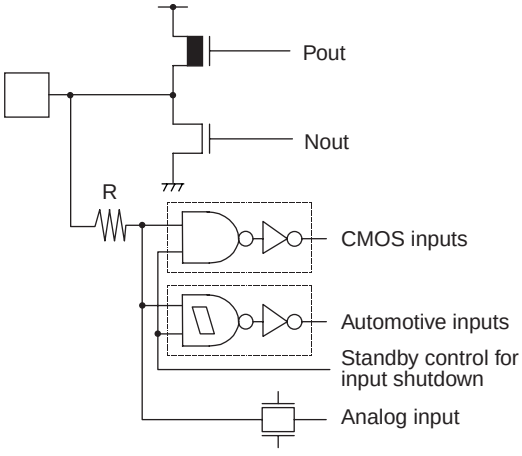Type	Circuit	Remarks
M		• CMOS level output (I_{OL} = 4 mA, I_{OH} = –4 mA) • CMOS inputs (With the standby-time input shutdown function) • Automotive input (With the standby-time input shutdown function)
N		• CMOS level output (I_{OL} = 4 mA, I_{OH} = –4 mA) • CMOS inputs (With the standby-time input shutdown function) • Automotive input (With the standby-time input shutdown function) • TTL input (With the standby-time input shutdown function) Programmable pullup registor:50 kΩ approx
O		• CMOS level output(I_{OL} = 4 mA, I_{OH} = –4 mA) • CMOS inputs (With the standby-time input shutdown function) • Automotive input (With the standby-time input shutdown function) • A/D analog input

■ HANDLING DEVICES

Special care is required for the following when handling the device :

- Preventing latch-up
- Treatment of unused pins
- Using external clock
- Precautions for when not using a sub clock signal
- Notes on during operation of PLL clock mode
- Power supply pins (V_{CC}/V_{SS})
- Pull-up/down resistors
- Crystal Oscillator Circuit
- Turning-on Sequence of Power Supply to A/D Converter and Analog Inputs
- Connection of Unused Pins of A/D Converter
- Notes on Energization
- Stabilization of power supply voltage
- Initialization
- Port0 to port3 output during Power-on**(External-bus mode)**
- Notes on using CAN Function
- Flash security Function

1. Preventing latch-up

CMOS IC chips may suffer latch-up under the following conditions :

- A voltage higher than V_{CC} or lower than V_{SS} is applied to an input or output pin.
- A voltage higher than the rated voltage is applied between V_{CC} and V_{SS}.
- The AV_{CC} power supply is applied before the V_{CC} voltage.

Latch-up may increase the power supply current drastically, causing thermal damage to the device.

For the same reason, also be careful not to let the analog power-supply voltage (AV_{CC}, AVRH) exceed the digital power-supply voltage.


2. Handling unused pins

Leaving unused input pins open may result in misbehavior or latch up and possible permanent damage of the device. Therefore they must be pulled up or pulled down through resistors. In this case those resistors should be more than 2 kΩ .

Unused bidirectional pins should be set to the output state and can be left open, or the input state with the above described connection.

3. Using external clock

To use external clock, drive the X0 pin and leave X1 pin open.

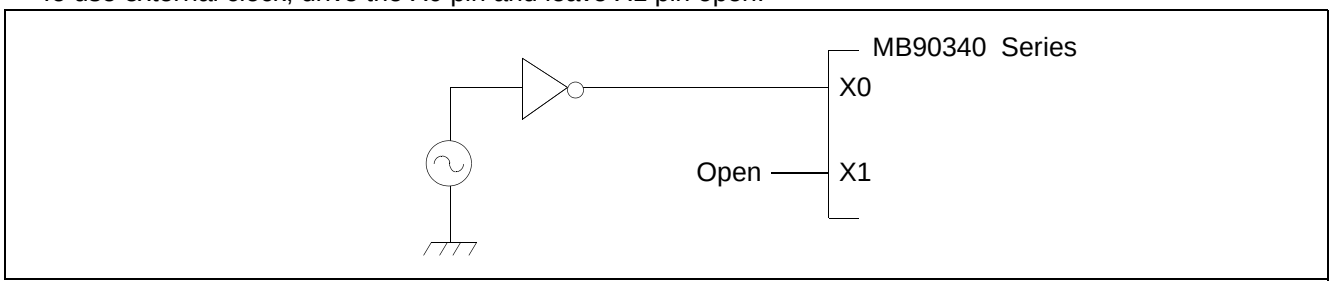

4. Precautions for when not using a sub clock signal


If you do not connect pins X0A and X1A to an oscillator, use pull-down handling on the X0A pin, and leave the X1A pin open.

5. Notes on during operation of PLL clock mode

If the PLL clock mode is selected, the microcontroller attempt to be working with the self-oscillating circuit even when there is no external oscillator or external clock input is stopped. Performance of this operation, however, cannot be guaranteed.

6. Power supply pins (V_{CC}/V_{SS})

- If there are multiple V_{CC} and V_{SS} pins, from the point of view of device design, pins to be of the same potential are connected the inside of the device to prevent such malfunctioning as latch up.
  To reduce unnecessary radiation, prevent malfunctioning of the strobe signal due to the rise of ground level, and observe the standard for total output current, be sure to connect the V_{CC} and V_{SS} pins to the power supply and ground externally.
- Connect V_{CC} and V_{SS} to the device from the current supply source at a low impedance.
- As a measure against power supply noise, connect a capacitor of about 0.1 μF as a bypass capacitor between V_{CC} and V_{SS} in the vicinity of V_{CC} and V_{SS} pins of the device

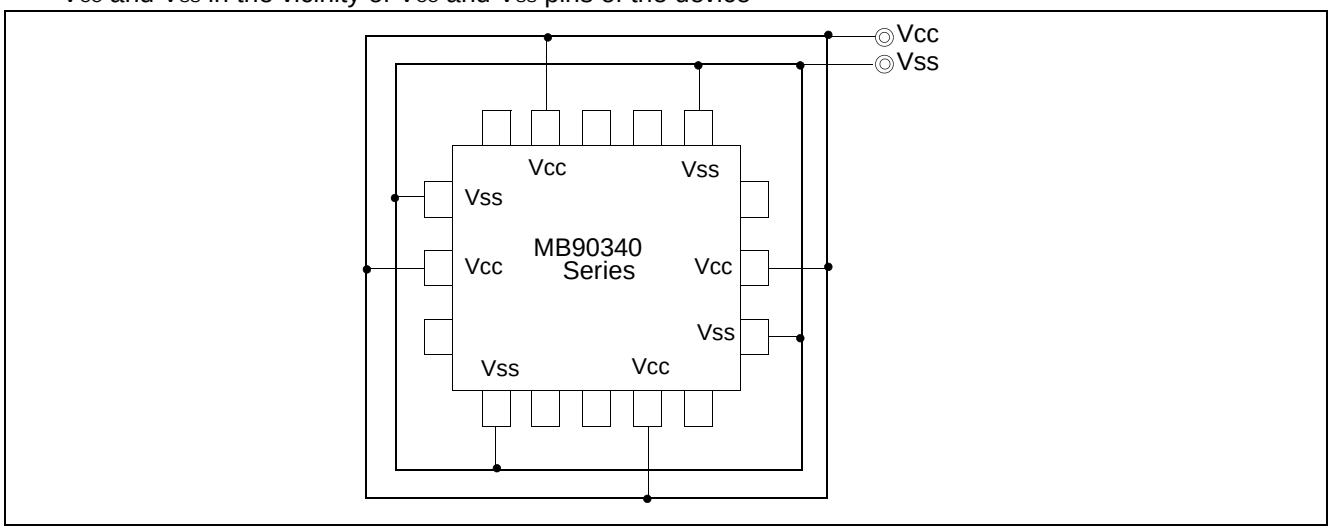

7. Pull-up/down resistors

The MB90340 Series does not support internal pull-up/down resistors (Port 0 to Port 3: built-in pull-up resistors). Use external components where needed.

8. Crystal Oscillator Circuit

Noises around X0 or X1 pins may be possible causes of abnormal operations. Make sure to provide bypass capacitors via shortest distance from X0, X1 pins, crystal oscillator (or ceramic resonator) and ground lines, and make sure, to the utmost effort, that lines of oscillation circuit not cross the lines of other circuits.

It is highly recommended to provide a printed circuit board art work surrounding X0 and X1 pins with a ground area for stabilizing the operation.

9. Turning-on Sequence of Power Supply to A/D Converter and Analog Inputs

Make sure to turn on the A/D converter power supply (AV_{CC}, AVRH, AVRL) and analog inputs (AN0 to AN23) after turning-on the digital power supply (V_{CC}) .

Turn-off the digital power after turning off the A/D converter supply and analog inputs. In this case, make sure that the voltage not exceed AVRH or AV_{CC} (turning on/off the analog and digital power supplies simultaneously is acceptable) .

10. Connection of Unused Pins of A/D Converter if A/D Converter is used

Connect unused pins of A/D converter to $AV_{CC} = V_{CC}$, AV_{SS} = AVRH = AVRL = V_{SS}.

11. Notes on Energization

To prevent the internal regulator circuit from malfunctioning, set the voltage rise time during energization at 50 or more µs (0.2 V to 2.7 V)

12. Stabilization of power supply voltage

A sudden change in the supply voltage may cause the device to malfunction even within the specified V_{CC} supply voltage operating range. Therefore, the V_{CC} supply voltage should be stabilized.


For reference, the supply voltage should be controlled so that V_{CC} ripple variations (peak-to-peak value) at commercial frequencies (50 Hz to 60 Hz) fall below 10% of the standard V_{CC} supply voltage and the coefficient of fluctuation does not exceed 0.1 V/ms at instantaneous power switching.

13. Initialization

In the device, there are internal registers which are initialized only by a power-on reset. To initialize these registers, turn on the power again.

14. Port 0 to port 3 output during Power-on (External-bus mode)

As shown below, when power is turned on in External-Bus mode, in spite of reset inpu, there is a possibility that output signal of Port 0 to Port 3 might be unstable.

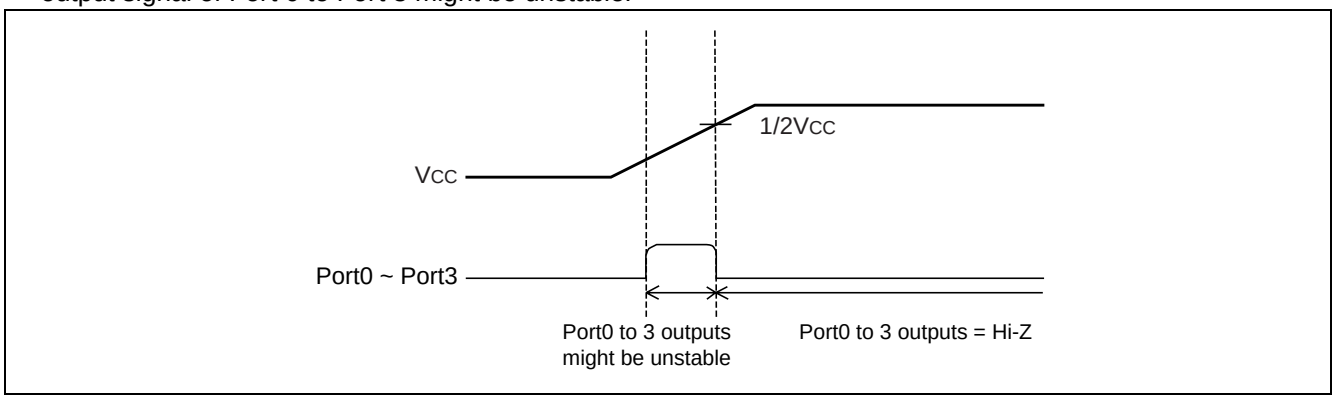

15. Notes on using CAN Function

To use CAN function, please set ’1’ to DIRECT bit of CAN Direct Mode Register (CDMR).
If DIRECT bit is set to ’0’ (initial value), wait states will be performed when accessing CAN registers.
Please refer to Hardware Manual of MB90340 series for detail of CAN Direct Mode Register.


16. Flash security Function (except for MB90F346A)

The security bit is located in the area of the flash memory.
If protection code 01_H is written in the security bit, the flash memory is in the protected state by security.
Therefore please do not write 01_H in this address if you do not use the security function.
Please refer to following table for the address of the security bit.


	Flash memory size	Address for security bit
MB90F347 MMB90F347A	Embedded 1 Mbit Flash Memory	$FE0001_H$
MB90F342A MB90F349A	Embedded 2 Mbit Flash Memory	$FC0001_H$
MB90F343A	Embedded 3 Mbit Flash Memory	$F90001_H$
MB90F345A	Embedded 4 Mbit Flash Memory	$F80001_H$

■ BLOCK DIAGRAMS

MB90V340A-101/102

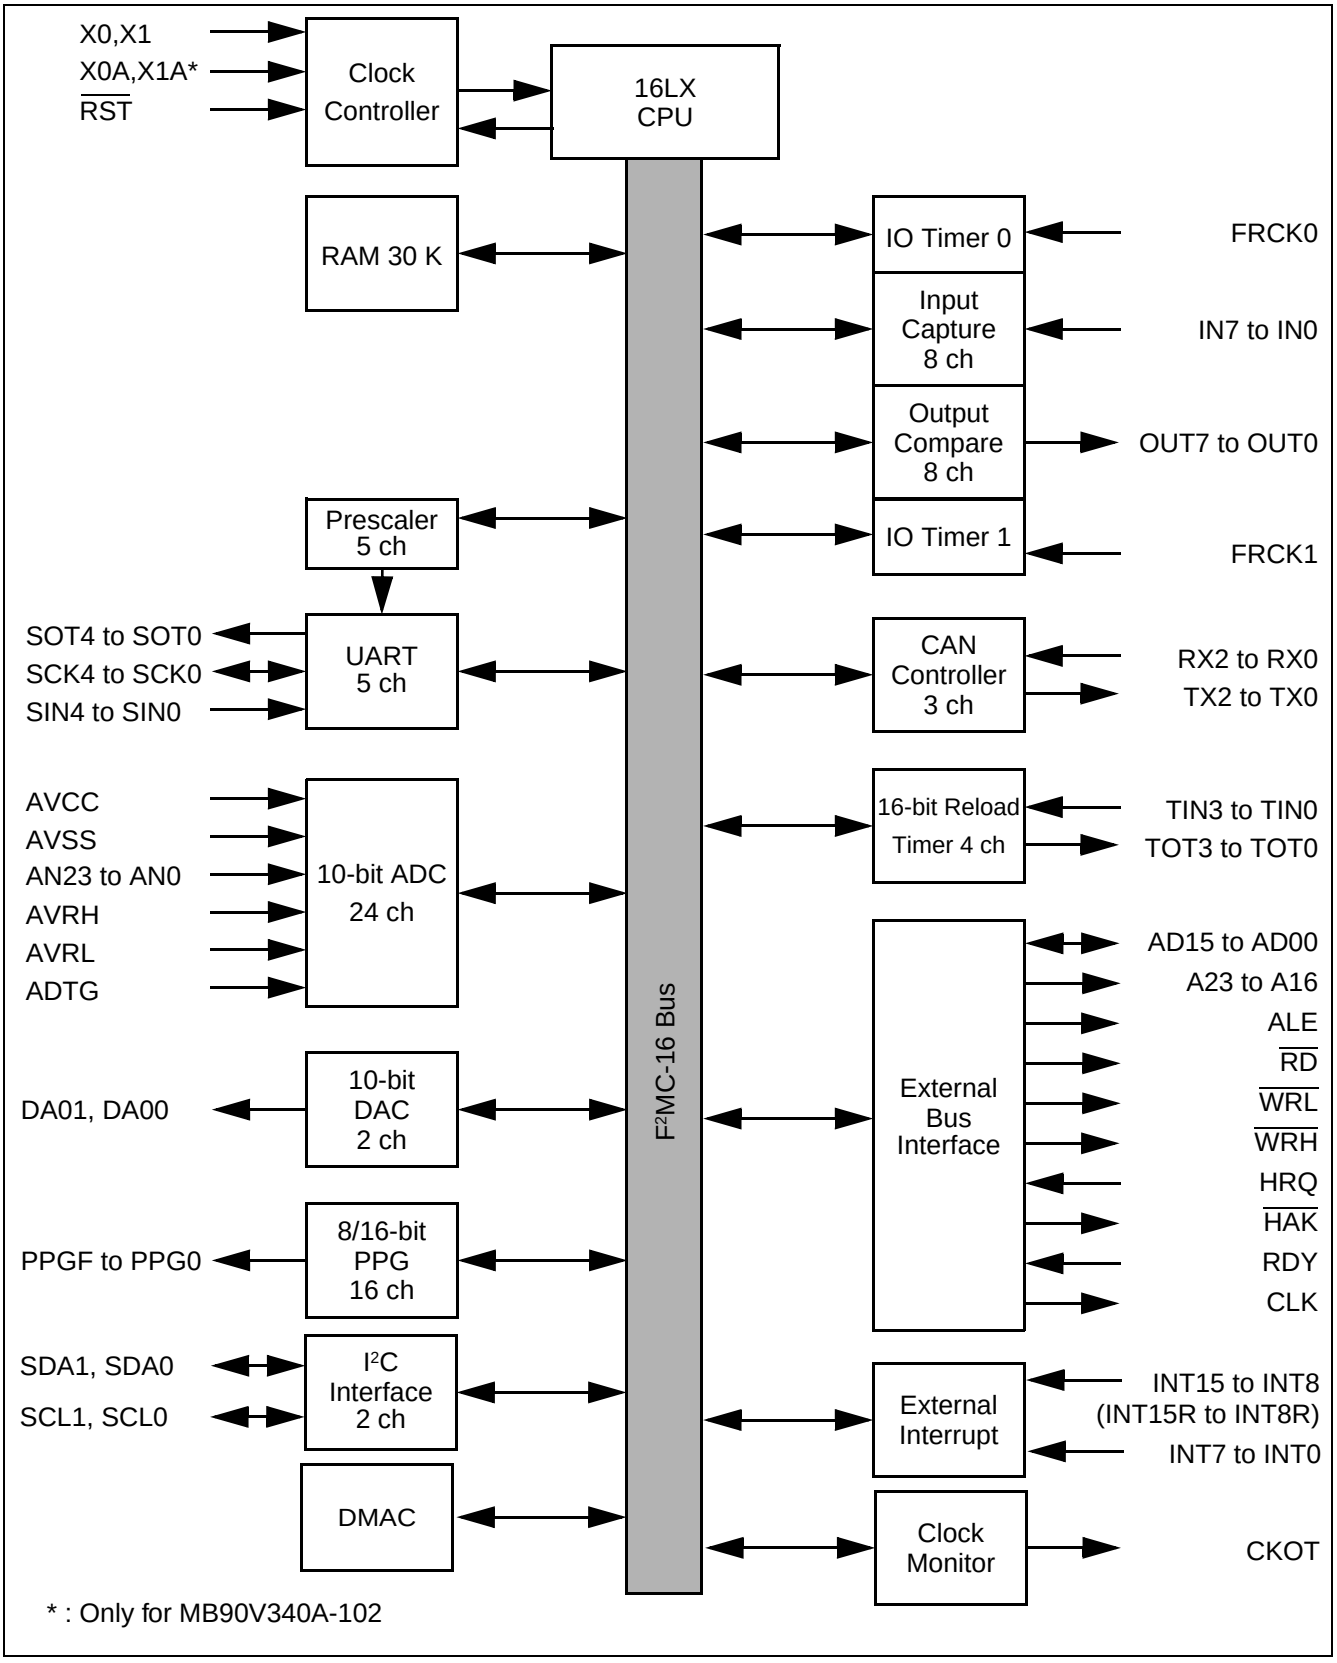



MB90F342A(S), MB90F342CA(S), MB90F343A(S), MB90F343CA(S), MB90F345A(S), MB90F345CA(S), , MB90F346A(S), MB90F346CA(S), MB90F347A(S), MB90F347CA(S), MB90F349A(S), MB90F349CA(S), MB90341A(S), MB90341CA(S), MB90342A(S), MB90342CA(S), MB90346A(S), MB90346CA(S), MB90347A(S), MB90347CA(S), MB90348A(S), MB90348CA(S), MB90349A(S), MB90349CA(S)

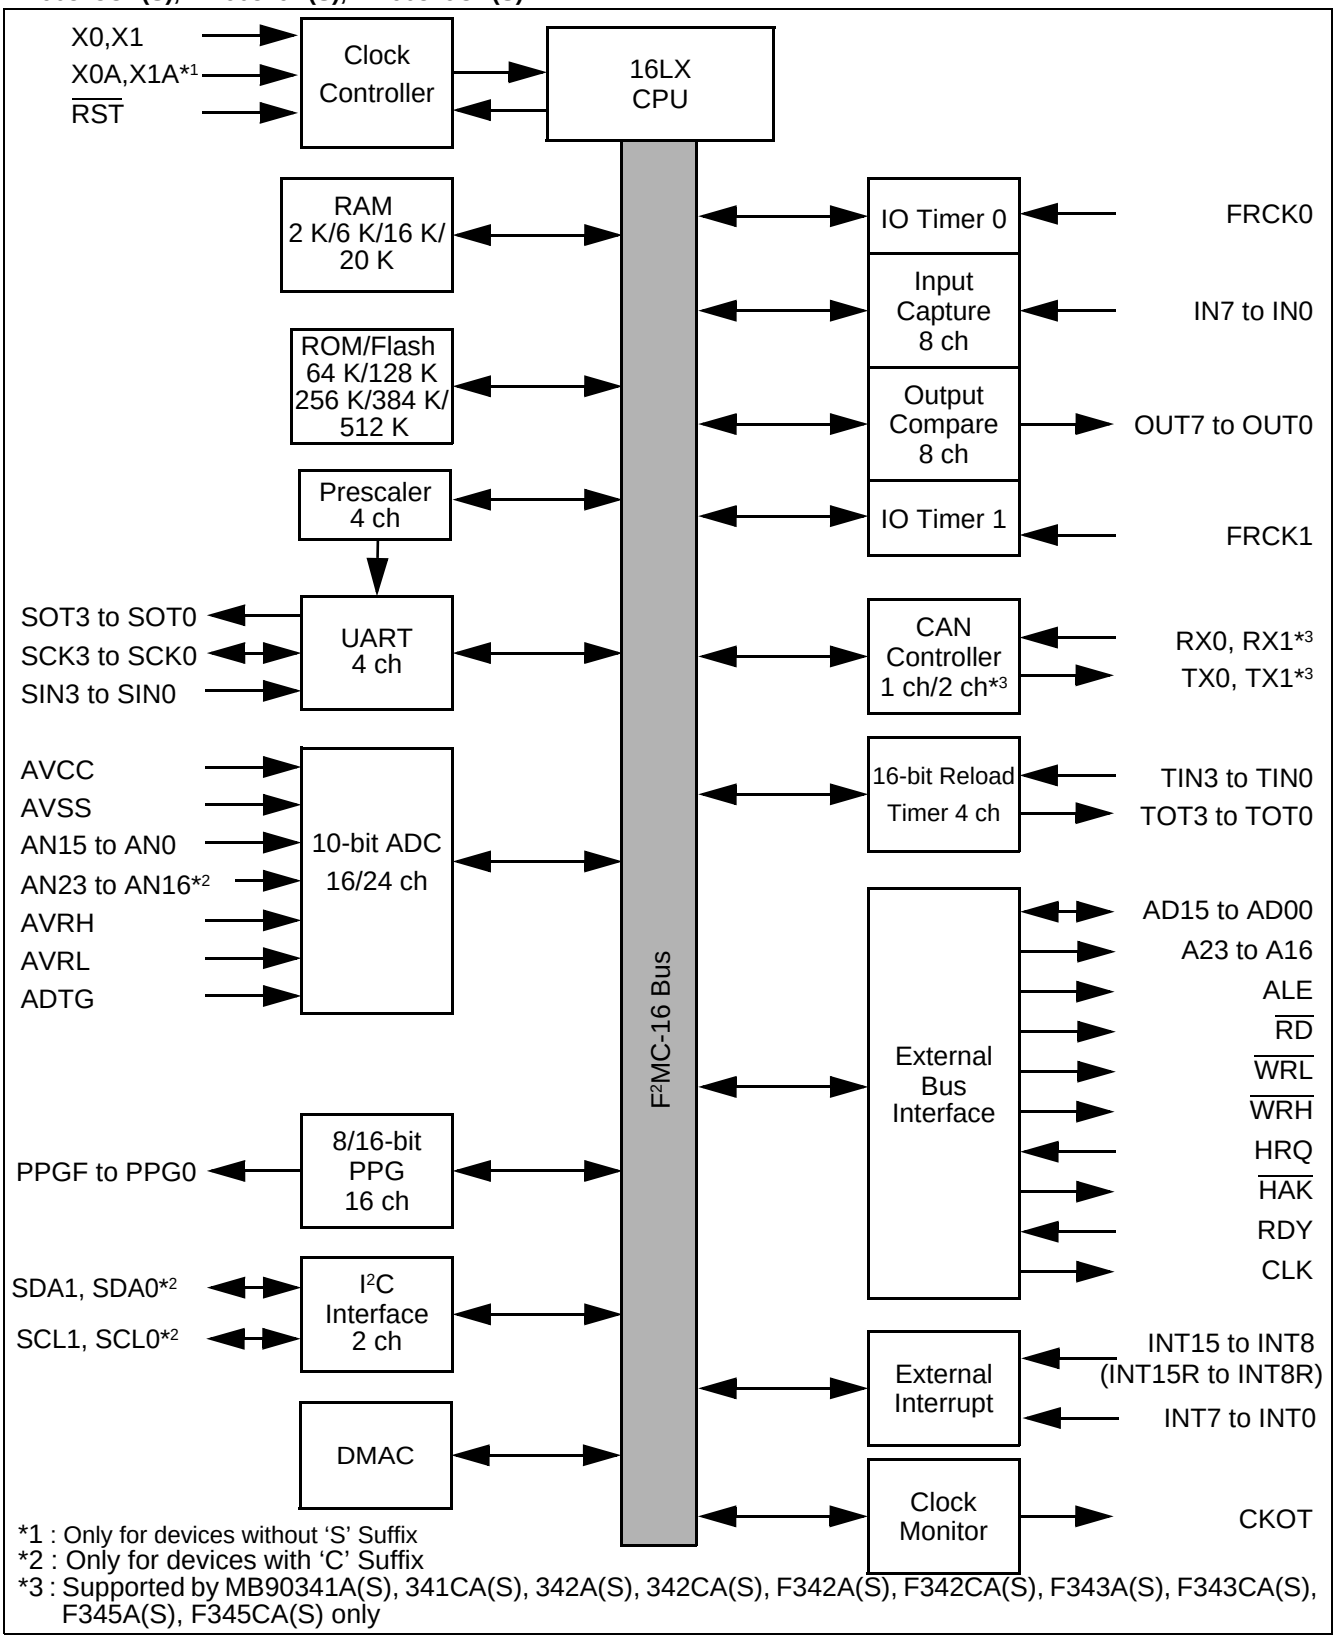

*1 : Only for devices without 'S' Suffix
*2 : Only for devices with 'C' Suffix
*3 : Supported by MB90341A(S), 341CA(S), 342A(S), 342CA(S), F342A(S), F342CA(S), F343A(S), F343CA(S), F345A(S), F345CA(S) only

■ MEMORY MAP

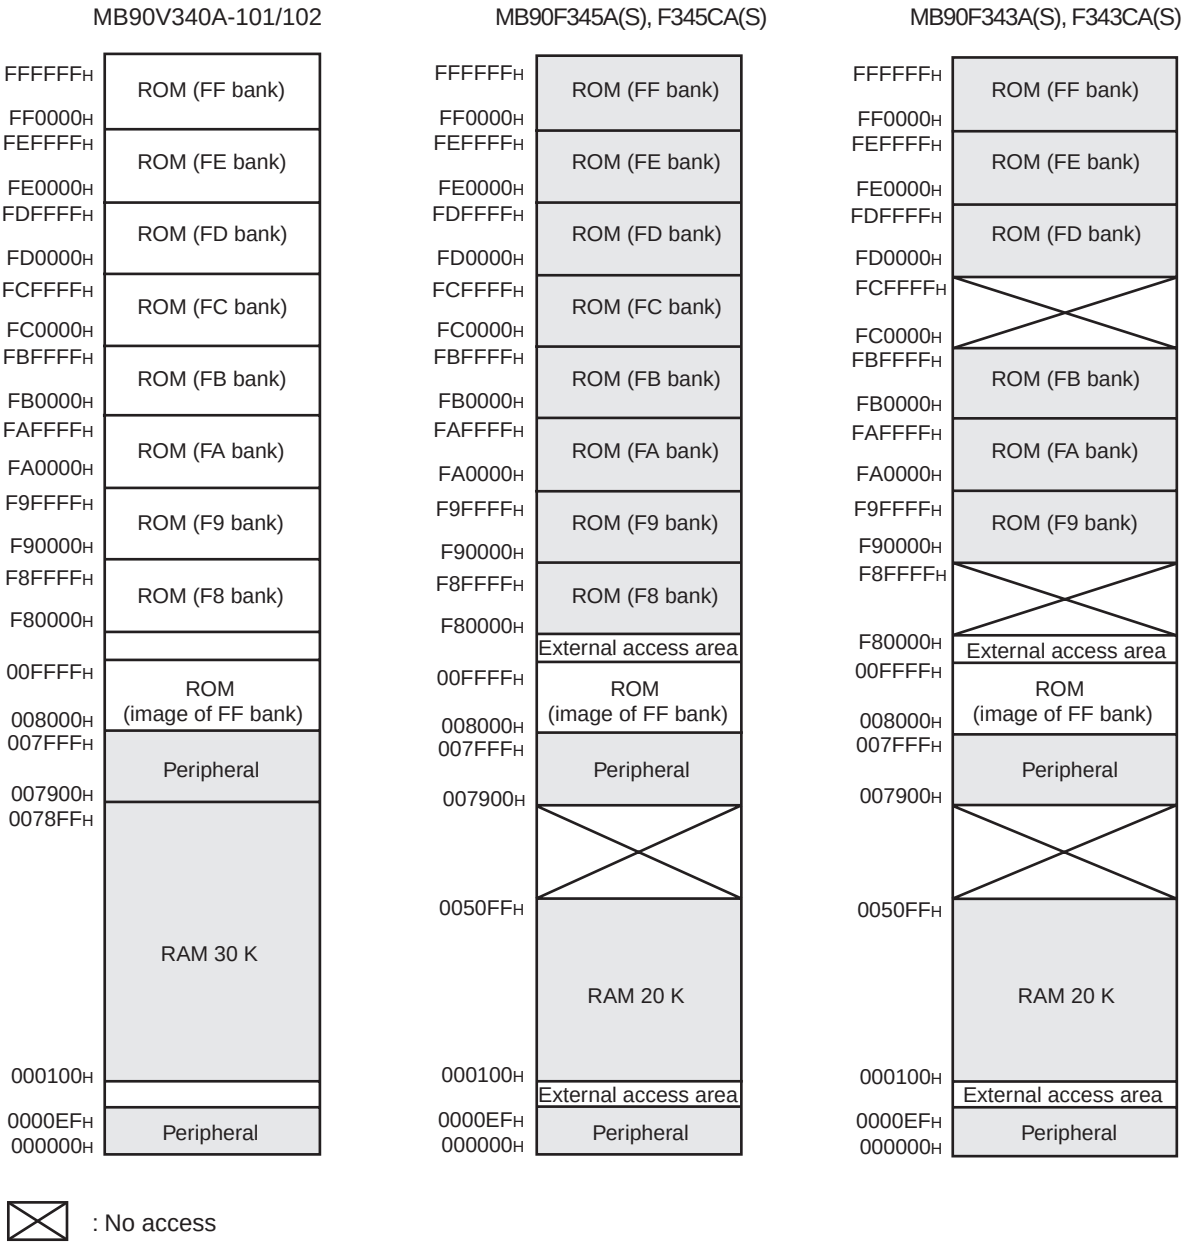
MB90V340A-101/102
FFFFFFH
ROM (FF bank)
FF0000H
FEFFFFH
ROM (FE bank)
FE0000H
FDFFFFH
ROM (FD bank)
FD0000H
FCFFFFH
ROM (FC bank)
FC0000H
FBFFFFH
ROM (FB bank)
FB0000H
FAFFFFH
ROM (FA bank)
FA0000H
F9FFFFH
ROM (F9 bank)
F90000H
F8FFFFH
ROM (F8 bank)
F80000H
00FFFFH
ROM
(image of FF bank)
008000H
007FFFH
Peripheral
007900H
0078FFH
RAM 30 K
000100H
0000EFH
Peripheral
000000H
MB90F345A(S), F345CA(S)
FFFFFFH
ROM (FF bank)
FF0000H
FEFFFFH
ROM (FE bank)
FE0000H
FDFFFFH
ROM (FD bank)
FD0000H
FCFFFFH
ROM (FC bank)
FC0000H
FBFFFFH
ROM (FB bank)
FB0000H
FAFFFFH
ROM (FA bank)
FA0000H
F9FFFFH
ROM (F9 bank)
F90000H
F8FFFFH
ROM (F8 bank)
F80000H
External access area
00FFFFH
ROM
(image of FF bank)
008000H
007FFFH
Peripheral
007900H
0050FFH
RAM 20 K
000100H
External access area
0000EFH
Peripheral
000000H
MB90F343A(S), F343CA(S)
FFFFFFH
ROM (FF bank)
FF0000H
FEFFFFH
ROM (FE bank)
FE0000H
FDFFFFH
ROM (FD bank)
FD0000H
FCFFFFH
FC0000H
FBFFFFH
ROM (FB bank)
FB0000H
FAFFFFH
ROM (FA bank)
FA0000H
F9FFFFH
ROM (F9 bank)
F90000H
F8FFFFH
F80000H
External access area
00FFFFH
ROM
(image of FF bank)
008000H
007FFFH
Peripheral
007900H
0050FFH
RAM 20 K
000100H
External access area
0000EFH
Peripheral
000000H
: No access

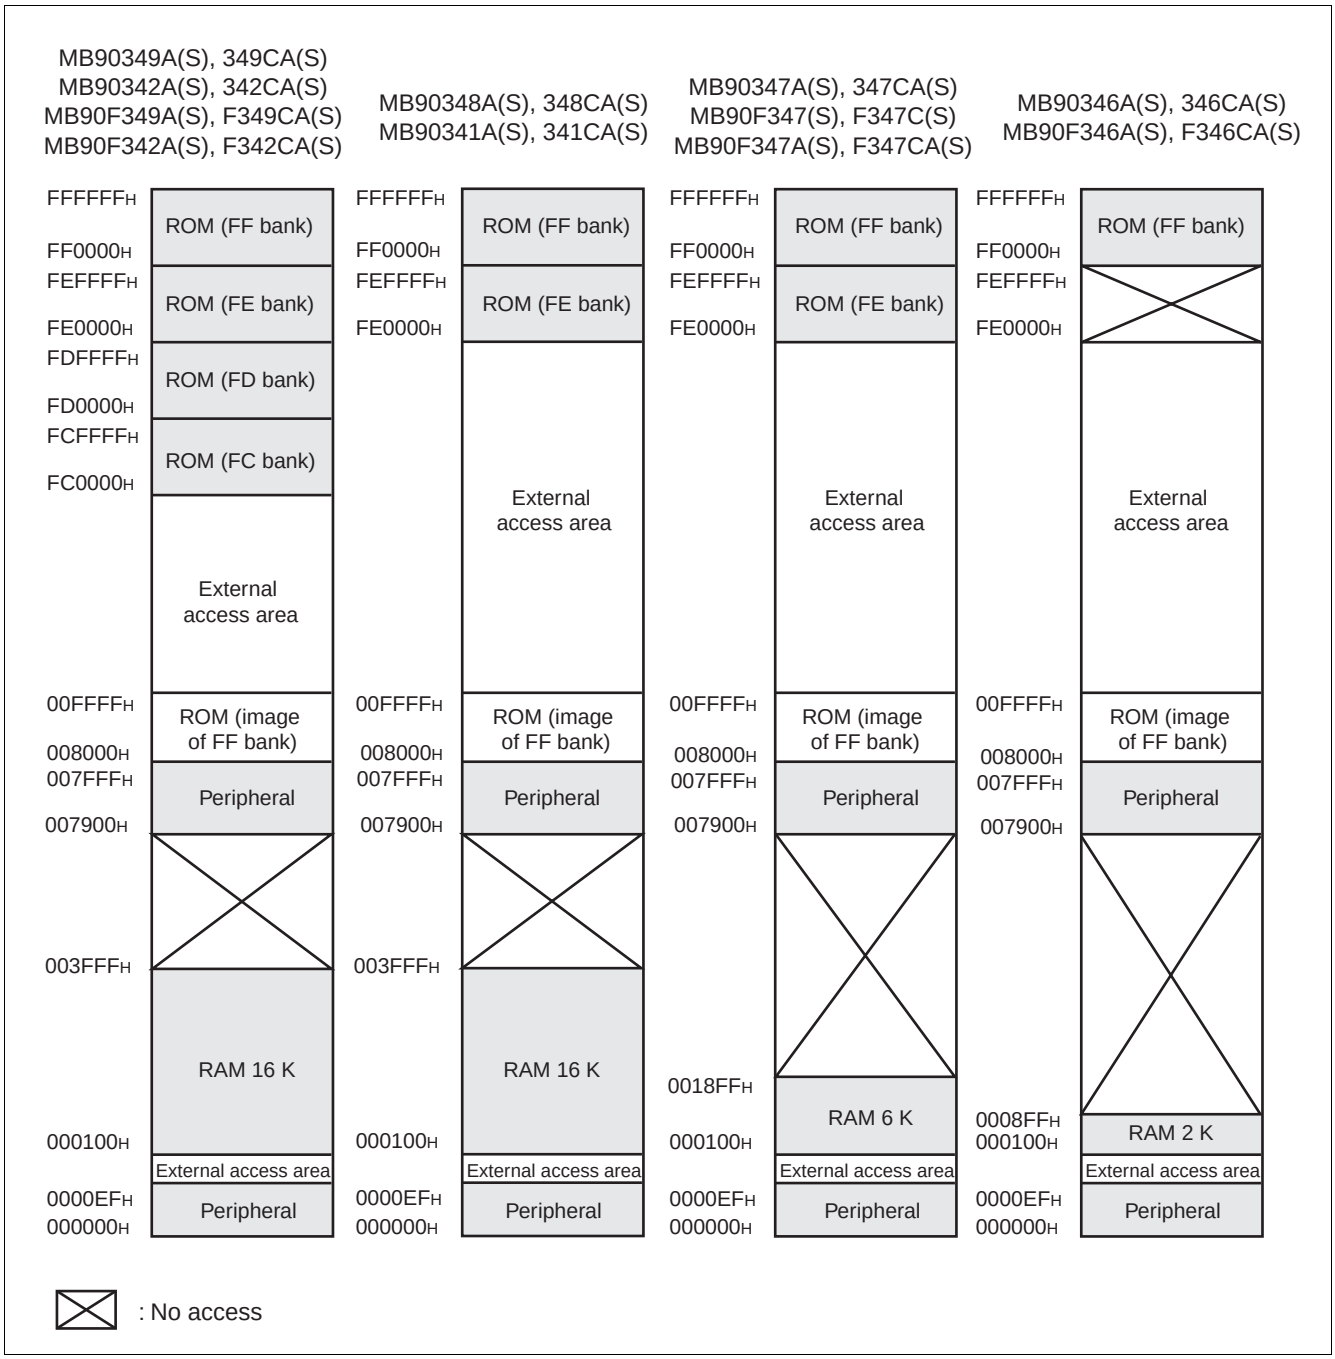

Note : The high-order portion of bank 00 gives the image of the FF bank ROM to make the small model of the C compiler effective. Since the low-order 16 bits are the same, the table in ROM can be referenced without using the far specification in the pointer declaration.
For example, an attempt to access 00C000H accesses the value at FFC000H in ROM.
The ROM area in bank FF exceeds 32 Kbytes, and its entire image cannot be shown in bank 00.
The image between FF8000H and FFFFFFH is visible in bank 00, while the image between FF0000H and FF7FFFH is visible only in bank FF.

■ I/O MAP

Address	Register	Abbreviation	Access	Resource name	Initial value
00H	Port 0 data register	PDR0	R/W	Port 0	XXXXXXXX
01H	Port 1 data register	PDR1	R/W	Port 1	XXXXXXXX
02H	Port 2 data register	PDR2	R/W	Port 2	XXXXXXXX
03H	Port 3 data register	PDR3	R/W	Port 3	XXXXXXXX
04H	Port 4 data register	PDR4	R/W	Port 4	XXXXXXXX
05H	Port 5 data register	PDR5	R/W	Port 5	XXXXXXXX
06H	Port 6 data register	PDR6	R/W	Port 6	XXXXXXXX
07H	Port 7 data register	PDR7	R/W	Port 7	XXXXXXXX
08H	Port 8 data register	PDR8	R/W	Port 8	XXXXXXXX
09H	Port 9 data register	PDR9	R/W	Port 9	XXXXXXXX
0AH	Port A data register	PDRA	R/W	Port A	XXXXXXXX
0BH	Port 5 Analog Input Enable Register	ADER5	R/W	Port 5, A/D	11111111
0CH	Port 6 Analog Input Enable Register	ADER6	R/W	Port 6, A/D	11111111
0DH	Port 7 Analog Input Enable Register	ADER7	R/W	Port 7, A/D	11111111
0EH	Input level select register 0	ILSR0	R/W	Ports	XXXXXXXX
0FH	Input level select register 1	ILSR1	R/W	Ports	XXXX0XXX
10H	Port 0 direction register	DDR0	R/W	Port 0	00000000
11H	Port 1 direction register	DDR1	R/W	Port 1	00000000
12H	Port 2 direction register	DDR2	R/W	Port 2	00000000
13H	Port 3 direction register	DDR3	R/W	Port 3	00000000
14H	Port 4 direction register	DDR4	R/W	Port 4	00000000
15H	Port 5 direction register	DDR5	R/W	Port 5	00000000
16H	Port 6 direction register	DDR6	R/W	Port 6	00000000
17H	Port 7 direction register	DDR7	R/W	Port 7	00000000
18H	Port 8 direction register	DDR8	R/W	Port 8	00000000
19H	Port 9 direction register	DDR9	R/W	Port 9	00000000
1AH	Port A direction register	DDRA	R/W	Port A	00000100
1BH	Reserved				
1CH	Port 0 Pullup control register	PUCR0	R/W	Port 0	00000000
1DH	Port 1 Pullup control register	PUCR1	R/W	Port 1	00000000
1EH	Port 2 Pullup control register	PUCR2	R/W	Port 2	00000000
1FH	Port 3 Pullup control register	PUCR3	W, R/W	Port 3	00000000

(Continued)

Address	Register	Abbrevia-tion	Access	Resource name	Initial value
20H	Serial Mode Register 0	SMR0	W,R/W	UART0	00000000
21H	Serial Control Register 0	SCR0	W,R/W		00000000
22H	Reception/Transmission Data Register 0	RDR0/ TDR0	R/W		00000000
23H	Serial Status Register 0	SSR0	R,R/W		00001000
24H	Extended Communication Control Register 0	ECCR0	R,W,R/ W		000000XX
25H	Extended Status/Control Register 0	ESCR0	R/W		00000100
26H	Baud Rate generator Register 00	BGR00	R/W		00000000
27H	Baud Rate generator Register 01	BGR01	R/W		00000000
28H	Serial Mode Register 1	SMR1	W,R/W	UART1	00000000
29H	Serial Control Register 1	SCR1	W,R/W		00000000
2AH	Reception/Transmission Data Register 1	RDR1/ TDR1	R/W		00000000
2BH	Serial Status Register 1	SSR1	R,R/W		00001000
2CH	Extended Communication Control Register 1	ECCR1	R,W, R/W		000000XX
2DH	Extended Status/Control Register 1	ESCR1	R/W		00000100
2EH	Baud Rate generator Register 10	BGR10	R/W		00000000
2FH	Baud Rate generator Register 11	BGR11	R/W		00000000
30H	PPG 0 operation mode control register	PPGC0	W,R/W	16-bit PPG 0/1	0X000XX1
31H	PPG 1 operation mode control register	PPGC1	W,R/W		0X000001
32H	PPG 0/PPG 1 count clock select register	PPG01	R/W		000000X0
33H	Reserved				
34H	PPG 2 operation mode control register	PPGC2	W,R/W	16-bit PPG 2/3	0X000XX1
35H	PPG 3 operation mode control register	PPGC3	W,R/W		0X000001
36H	PPG 2/PPG 3 count clock select register	PPG23	R/W		000000X0
37H	Reserved				
38H	PPG 4 operation mode control register	PPGC4	W,R/W	16-bit PPG 4/5	0X000XX1
39H	PPG 5 operation mode control register	PPGC5	W,R/W		0X000001
3AH	PPG 4/PPG 5 clock select register	PPG45	R/W		000000X0
3BH	Address detect control register 1	PACSR1	R/W	Address Match Detection 1	00000000
3CH	PPG 6 operation mode control register	PPGC6	W,R/W	16-bit PPG 6/7	0X000XX1
3DH	PPG 7 operation mode control register	PPGC7	W,R/W		0X000001
3EH	PPG 6/PPG 7 count clock control register	PPG67	R/W		000000X0
3FH	Reserved				

(Continued)

Address	Register	Abbrevia-tion	Access	Resource name	Initial value
40H	PPG 8 operation mode control register	PPGC8	W,R/W	16-bit PPG 8/9	0X000XX1
41H	PPG 9 operation mode control register	PPGC9	W,R/W		0X000001
42H	PPG 8/PPG 9 count clock control register	PPG89	R/W		000000X0
43H	Reserved				
44H	PPG A operation mode control register	PPGCA	W,R/W	16-bit PPG A/B	0X000XX1
45H	PPG B operation mode control register	PPGCB	W,R/W		0X000001
46H	PPG A/PPG B count clock select register	PPGAB	R/W		000000X0
47H	Reserved				
48H	PPG C operation mode control register	PPGCC	W,R/W	16-bit PPG C/D	0X000XX1
49H	PPG D operation mode control register	PPGCD	W,R/W		0X000001
4AH	PPG C/PPG D count clock select register	PPGCD	R/W		000000X0
4BH	Reserved				
4CH	PPG E operation mode control register	PPGCE	W,R/W	16-bit PPG E/F	0X000XX1
4DH	PPG F operation mode control register	PPGCF	W,R/W		0X000001
4EH	PPG E/PPG F count clock select register	PPGEF	R/W		000000X0
4FH	Reserved				
50H	Input Capture Control Status 0/1	ICS01	R/W	Input Capture 0/1	00000000
51H	Input Capture Edge 0/1	ICE01	R/W, R		XXX0X0XX
52H	Input Capture Control Status 2/3	ICS23	R/W	Input Capture 2/3	00000000
53H	Input Capture Edge 2/3	ICE23	R		XXXXXXXX
54H	Input Capture Control Status 4/5	ICS45	R/W	Input Capture 4/5	00000000
55H	Input Capture Edge 4/5	ICE45	R		XXXXXXXX
56H	Input Capture Control Status 6/7	ICS67	R/W	Input Capture 6/7	00000000
57H	Input Capture Edge 6/7	ICE67	R/W, R		XXX000XX
58H	Output Compare Control Status 0	OCS0	R/W	Output Compare 0/1	0000XX00
59H	Output Compare Control Status 1	OCS1	R/W		0XX00000
5AH	Output Compare Control Status 2	OCS2	R/W	Output Compare 2/3	0000XX00
5BH	Output Compare Control Status 3	OCS3	R/W		0XX00000
5CH	Output Compare Control Status 4	OCS4	R/W	Output Compare 4/5	0000XX00
5DH	Output Compare Control Status 5	OCS5	R/W		0XX00000
5EH	Output Compare Control Status 6	OCS6	R/W	Output Compare 6/7	0000XX00
5FH	Output Compare Control Status 7	OCS7	R/W		0XX00000

(Continued)

Address	Register	Abbreviation	Access	Resource name	Initial value
60H	Timer Control Status 0	TMCSR0	R/W	16-bit Reload Timer 0	00000000
61H	Timer Control Status 0	TMCSR0	R/W		XXXX0000
62H	Timer Control Status 1	TMCSR1	R/W	16-bit Reload Timer 1	00000000
63H	Timer Control Status 1	TMCSR1	R/W		XXXX0000
64H	Timer Control Status 2	TMCSR2	R/W	16-bit Reload Timer 2	00000000
65H	Timer Control Status 2	TMCSR2	R/W		XXXX0000
66H	Timer Control Status 3	TMCSR3	R/W	16-bit Reload Timer 3	00000000
67H	Timer Control Status 3	TMCSR3	R/W		XXXX0000
68H	A/D Control Status 0	ADCS0	R/W	A/D Converter	000XXXX0
69H	A/D Control Status 1	ADCS1	R/W		0000000X
6AH	A/D Data 0	ADCR0	R		00000000
6BH	A/D Data 1	ADCR1	R		XXXXXX00
6CH	ADC Setting 0	ADSR0	R/W		00000000
6DH	ADC Setting 1	ADSR1	R/W		00000000
6EH	Reserved				
6FH	ROM Mirror Function Select	ROMM	W	ROM Mirror	XXXXXXX1
70H to 8FH	Reserved for CAN Interface 0/1. Refer to “■ CAN CONTROLLERS”				
90H to 9AH	Reserved				
9BH	DMA Descriptor Channel Specified	DCSR	R/W	DMA	00000000
9CH	DMA Status L	DSRL	R/W		00000000
9DH	DMA Status H	DSRH	R/W		00000000
9EH	Address Detect Control Register 0	PACSR0	R/W	Address Match Detection 0	00000000
9FH	Delayed Interrupt/release	DIRR	R/W	Delayed Interrupt	XXXXXXX0
A0H	Low-power Mode Control Register	LPMCR	W,R/W	Low Power Control Circuit	00011000
A1H	Clock Selection Register	CKSCR	R,R/W	Low Power Control Circuit	11111100
A2H, A3H	Reserved				
A4H	DMA Stop Status	DSSR	R/W	DMA	00000000
A5H	Automatic ready function select reg.	ARSR	W	External Memory Access	0011XX00
A6H	External address output control reg.	HACR	W		00000000
A7H	Bus control signal selection register	ECSR	W		0000000X
A8H	Watchdog Control Register	WDTC	R,W	Watchdog Timer	XXXXX111
A9H	Time Base Timer Control Register	TBTC	W,R/W	Time Base Timer	1XX00100

(Continued)

Address	Register	Abbreviation	Access	Resource name	Initial value
AA$_H$	Watch Timer Control register	WTC	R,R/W	Watch Timer	1X001000
AB$_H$	Reserved				
AC$_H$	DMA Enable L	DERL	R/W	DMA	00000000
AD$_H$	DMA Enable H	DERH	R/W		00000000
AE$_H$	Flash Control Status (FlashDevices only. Otherwise reserved)	FMCS	R,R/W	Flash Memory	000X0000
AF$_H$	Reserved				
B0$_H$	Interrupt control register 00	ICR00	W,R/W	Interrupt Control	00000111
B1$_H$	Interrupt control register 01	ICR01	W,R/W		00000111
B2$_H$	Interrupt control register 02	ICR02	W,R/W		00000111
B3$_H$	Interrupt control register 03	ICR03	W,R/W		00000111
B4$_H$	Interrupt control register 04	ICR04	W,R/W		00000111
B5$_H$	Interrupt control register 05	ICR05	W,R/W		00000111
B6$_H$	Interrupt control register 06	ICR06	W,R/W		00000111
B7$_H$	Interrupt control register 07	ICR07	W,R/W		00000111
B8$_H$	Interrupt control register 08	ICR08	W,R/W		00000111
B9$_H$	Interrupt control register 09	ICR09	W,R/W		00000111
BA$_H$	Interrupt control register 10	ICR10	W,R/W		00000111
BB$_H$	Interrupt control register 11	ICR11	W,R/W		00000111
BC$_H$	Interrupt control register 12	ICR12	W,R/W		00000111
BD$_H$	Interrupt control register 13	ICR13	W,R/W		00000111
BE$_H$	Interrupt control register 14	ICR14	W,R/W		00000111
BF$_H$	Interrupt control register 15	ICR15	W,R/W		00000111
C0$_H$	D/A Converter data 0	DAT0	R/W	D/A Converter	XXXXXXXX
C1$_H$	D/A Converter data 1	DAT1	R/W		XXXXXXXX
C2$_H$	D/A Control 0	DACR0	R/W		XXXXXXX0
C3$_H$	D/A Control 1	DACR1	R/W		XXXXXXX0
C4$_H$, C5$_H$	Reserved				
C6$_H$	External Interrupt Enable 0	ENIR0	R/W	External Interrupt 0	00000000
C7$_H$	External Interrupt Source 0	EIRR0	R/W		XXXXXXXX
C8$_H$	External Interrupt Level Setting 0	ELVR0	R/W		00000000
C9$_H$	External Interrupt Level Setting 0	ELVR0	R/W		00000000

(Continued)

Address	Register	Abbreviation	Access	Resource name	Initial value
CA$_H$	External Interrupt Enable 1	ENIR1	R/W	External Interrupt 1	00000000
CB$_H$	External Interrupt Source 1	EIRR1	R/W		XXXXXXXX
CC$_H$	External Interrupt Level Setting 1	ELVR1	R/W		00000000
CD$_H$	External Interrupt Level Setting 1	ELVR1	R/W		00000000
CE$_H$	External Interrupt Source Select	EISSR	R/W		00000000
CF$_H$	PLL/Subclock Control register	PSCCR	W	PLL	XXXX0000
D0$_H$	DMA Buffer Addrss Pointer L	BAPL	R/W	DMA	XXXXXXXX
D1$_H$	DMA Buffer Addrss Pointer M	BAPM	R/W		XXXXXXXX
D2$_H$	DMA Buffer Addrss Pointer H	BAPH	R/W		XXXXXXXX
D3$_H$	DMA Control	DMACS	R/W		XXXXXXXX
D4$_H$	I/O Register Address Pointer L	IOAL	R/W		XXXXXXXX
D5$_H$	I/O Register Address Pointer H	IOAH	R/W		XXXXXXXX
D6$_H$	Data Counter L	DCTL	R/W		XXXXXXXX
D7$_H$	Data Counter H	DCTH	R/W		XXXXXXXX
D8$_H$	Serial Mode Register 2	SMR2	W,R/W	UART2	00000000
D9$_H$	Serial Control Register 2	SCR2	W,R/W		00000000
DA$_H$	Reception/Transmission Data Register 2	RDR2/ TDR2	R/W		00000000
DB$_H$	Serial Status Register 2	SSR2	R,R/W		00001000
DC$_H$	Extended Communication Control Register 2	ECCR2	R,W, R/W		000000XX
DD$_H$	Extended Status Control Register 2	ESCR2	R/W		00000100
DE$_H$	Baud Rate Generator Register 20	BGR20	R/W		00000000
DF$_H$	Baud Rate Generator Register 21	BGR21	R/W		00000000
E0$_H$ to EF$_H$	Reserved for CAN Interface 2. Refer to “■ CAN CONTROLLERS”				
F0$_H$ to FF$_H$	External				

(Continued)

Address	Register	Abbreviation	Access	Resource name	Initial value
7900H	Reload Register L0	PRLL0	R/W	16-bit PPG 0/1	XXXXXXXX
7901H	Reload Register H0	PRLH0	R/W		XXXXXXXX
7902H	Reload Register L1	PRLL1	R/W		XXXXXXXX
7903H	Reload Register H1	PRLH1	R/W		XXXXXXXX
7904H	Reload Register L2	PRLL2	R/W	16-bit PPG 2/3	XXXXXXXX
7905H	Reload Register H2	PRLH2	R/W		XXXXXXXX
7906H	Reload Register L3	PRLL3	R/W		XXXXXXXX
7907H	Reload Register H3	PRLH3	R/W		XXXXXXXX
7908H	Reload Register L4	PRLL4	R/W	16-bit PPG 4/5	XXXXXXXX
7909H	Reload Register H4	PRLH4	R/W		XXXXXXXX
790AH	Reload Register L5	PRLL5	R/W		XXXXXXXX
790BH	Reload Register H5	PRLH5	R/W		XXXXXXXX
790CH	Reload Register L6	PRLL6	R/W	16-bit PPG 6/7	XXXXXXXX
790DH	Reload Register H6	PRLH6	R/W		XXXXXXXX
790EH	Reload Register L7	PRLL7	R/W		XXXXXXXX
790FH	Reload Register H7	PRLH7	R/W		XXXXXXXX
7910H	Reload Register L8	PRLL8	R/W	16-bit PPG 8/9	XXXXXXXX
7911H	Reload Register H8	PRLH8	R/W		XXXXXXXX
7912H	Reload Register L9	PRLL9	R/W		XXXXXXXX
7913H	Reload Register H9	PRLH9	R/W		XXXXXXXX
7914H	Reload Register LA	PRLLA	R/W	16-bit PPG A/B	XXXXXXXX
7915H	Reload Register HA	PRLHA	R/W		XXXXXXXX
7916H	Reload Register LB	PRLLB	R/W		XXXXXXXX
7917H	Reload Register HB	PRLHB	R/W		XXXXXXXX
7918H	Reload Register LC	PRLLC	R/W	16-bit PPG C/D	XXXXXXXX
7919H	Reload Register HC	PRLHC	R/W		XXXXXXXX
791AH	Reload Register LD	PRLLD	R/W		XXXXXXXX
791BH	Reload Register HD	PRLHD	R/W		XXXXXXXX
791CH	Reload Register LE	PRLLE	R/W	16-bit PPG E/F	XXXXXXXX
791DH	Reload Register HE	PRLHE	R/W		XXXXXXXX
791EH	Reload Register LF	PRLLF	R/W		XXXXXXXX
791FH	Reload Register HF	PRLHF	R/W		XXXXXXXX
7920H	Input Capture 0	IPCP0	R	Input Capture 0/1	XXXXXXXX
7921H	Input Capture 0	IPCP0	R		XXXXXXXX
7922H	Input Capture 1	IPCP1	R		XXXXXXXX
7923H	Input Capture 1	IPCP1	R		XXXXXXXX

(Continued)

Address	Register	Abbreviation	Access	Resource name	Initial value
7924H	Input Capture 2	IPCP2	R	Input Capture 2/3	XXXXXXXX
7925H	Input Capture 2	IPCP2	R		XXXXXXXX
7926H	Input Capture 3	IPCP3	R		XXXXXXXX
7927H	Input Capture 3	IPCP3	R		XXXXXXXX
7928H	Input Capture 4	IPCP4	R	Input Capture 4/5	XXXXXXXX
7929H	Input Capture 4	IPCP4	R		XXXXXXXX
792AH	Input Capture 5	IPCP5	R		XXXXXXXX
792BH	Input Capture 5	IPCP5	R		XXXXXXXX
792CH	Input Capture 6	IPCP6	R	Input Capture 6/7	XXXXXXXX
792DH	Input Capture 6	IPCP6	R		XXXXXXXX
792EH	Input Capture 7	IPCP7	R		XXXXXXXX
792FH	Input Capture 7	IPCP7	R		XXXXXXXX
7930H	Output Compare 0	OCCP0	R/W	Output Compare 0/1	XXXXXXXX
7931H	Output Compare 0	OCCP0	R/W		XXXXXXXX
7932H	Output Compare 1	OCCP1	R/W		XXXXXXXX
7933H	Output Compare 1	OCCP1	R/W		XXXXXXXX
7934H	Output Compare 2	OCCP2	R/W	Output Compare 2/3	XXXXXXXX
7935H	Output Compare 2	OCCP2	R/W		XXXXXXXX
7936H	Output Compare 3	OCCP3	R/W		XXXXXXXX
7937H	Output Compare 3	OCCP3	R/W		XXXXXXXX
7938H	Output Compare 4	OCCP4	R/W	Output Compare 4/5	XXXXXXXX
7939H	Output Compare 4	OCCP4	R/W		XXXXXXXX
793AH	Output Compare 5	OCCP5	R/W		XXXXXXXX
793BH	Output Compare 5	OCCP5	R/W		XXXXXXXX
793CH	Output Compare 6	OCCP6	R/W	Output Compare 6/7	XXXXXXXX
793DH	Output Compare 6	OCCP6	R/W		XXXXXXXX
793EH	Output Compare 7	OCCP7	R/W		XXXXXXXX
793FH	Output Compare 7	OCCP7	R/W		XXXXXXXX
7940H	Timer Data 0	TCDT0	R/W	I/O Timer 0	00000000
7941H	Timer Data 0	TCDT0	R/W		00000000
7942H	Timer Control Status 0	TCCSL0	R/W		00000000
7943H	Timer Control Status 0	TCCSH0	R/W		0XXXXXXX
7944H	Timer Data 1	TCDT1	R/W	I/O Timer 1	00000000
7945H	Timer Data 1	TCDT1	R/W		00000000
7946H	Timer Control Status 1	TCCSL1	R/W		00000000
7947H	Timer Control Status 1	TCCSH1	R/W		0XXXXXXX

(Continued)

Address	Register	Abbreviation	Access	Resource name	Initial value
7948H	Timer 0/Reload 0	TMR0/ TMRLR0	R/W	16-bit Reload Timer 0	XXXXXXXX
7949H			R/W		XXXXXXXX
794AH	Timer 1/Reload 1	TMR1/ TMRLR1	R/W	16-bit Reload Timer 1	XXXXXXXX
794BH			R/W		XXXXXXXX
794CH	Timer 2/Reload 2	TMR2/ TMRLR2	R/W	16-bit Reload Timer 2	XXXXXXXX
794DH			R/W		XXXXXXXX
794EH	Timer 3/Reload 3	TMR3/ TMRLR3	R/W	16-bit Reload Timer 3	XXXXXXXX
794FH			R/W		XXXXXXXX
7950H	Serial Mode Register 3	SMR3	W,R/W	UART3	00000000
7951H	Serial Control Register 3	SCR3	W,R/W		00000000
7952H	Reception/Transmission Data Register 3	RDR3/ TDR3	R/W		00000000
7953H	Serial Status Register 3	SSR3	R,R/W		00001000
7954H	Extended Communication Control Register 3	ECCR3	R,W, R/W		000000XX
7955H	Extended Status Control Register	ESCR3	R/W		00000100
7956H	Baud Rate Generator Register 30	BGR30	R/W		00000000
7957H	Baud Rate Generator Register 31	BGR31	R/W		00000000
7958H	Serial Mode Register 4	SMR4	W,R/W	UART4	00000000
7959H	Serial Control Register 4	SCR4	W,R/W		00000000
795AH	Reception/Transmission Data Register 4	RDR4/ TDR4	R/W		00000000
795BH	Serial Status Register 4	SSR4	R,R/W		00001000
795CH	Extended Communication Control Register 4	ECCR4	R,W, R/W		000000XX
795DH	Extended Status Control Register	ESCR4	R/W		00000100
795EH	Baud Rate Generator Register 40	BGR40	R/W		00000000
795FH	Baud Rate generator Register 41	BGR41	R/W		00000000
7960H to 796BH	Reserved				
796CH	Clock output enable register	CLKR	R/W	Clock Monitor	XXXX0000
796DH	Reserved				
796EH	CAN Direct Mode Register	CDMR	R/W	CAN clock sync	XXXXXXX0
796FH	CAN switch register	CANSWR	R/W	CAN 0/1	XXXXXX00

(Continued)

Address	Register	Abbreviation	Access	Resource name	Initial value
7970H	I²C bus status register 0	IBSR0	R	I²C Interface 0	00000000
7971H	I²C bus control register 0	IBCR0	W,R/W		00000000
7972H	I²C 10 bit slave address register 0	ITBAL0	R/W		00000000
7973H		ITBAH0	R/W		00000000
7974H	I²C 10 bit slave address mask register 0	ITMKL0	R/W		11111111
7975H		ITMKH0	R/W		00111111
7976H	I²C 7 bit slave address register 0	ISBA0	R/W		00000000
7977H	I²C 7 bit slave address mask register 0	ISMK0	R/W		01111111
7978H	I²C data register 0	IDAR0	R/W		00000000
7979H, 797AH	Reserved				
797BH	I²C clock control register 0	ICCR0	R/W	I²C Interface 0	00011111
797CH to 797FH	Reserved				
7980H	I²C bus status register 1	IBSR1	R	I²C Interface 1	00000000
7981H	I²C bus control register 1	IBCR1	W,R/W		00000000
7982H	I²C 10 bit slave address register 1	ITBAL1	R/W		00000000
7983H		ITBAH1	R/W		00000000
7984H	I²C 10 bit slave address mask register 1	ITMKL1	R/W		11111111
7985H		ITMKH1	R/W		00111111
7986H	I²C 7 bit slave address register 1	ISBA1	R/W		00000000
7987H	I²C 7 bit slave address mask register 1	ISMK1	R/W		01111111
7988H	I²C data register 1	IDAR1	R/W		00000000
7989H, 798AH	Reserved				
798BH	I²C clock control register 1	ICCR1	R/W	I²C Interface 1	00011111
798CH to 79C1H	Reserved				
79C2H	Clock Modulator Control Register	CMCR	R,R/W	Clock Modulator	0001X000
79C3H to 79DFH	Reserved				

(Continued)

(Continued)

Address	Register	Abbreviation	Access	Resource name	Initial value
79E0H	Detect Address Setting 0	PADR0	R/W	Address Match Detection 0	XXXXXXXX
79E1H	Detect Address Setting 0	PADR0	R/W		XXXXXXXX
79E2H	Detect Address Setting 0	PADR0	R/W		XXXXXXXX
79E3H	Detect Address Setting 1	PADR1	R/W		XXXXXXXX
79E4H	Detect Address Setting 1	PADR1	R/W		XXXXXXXX
79E5H	Detect Address Setting 1	PADR1	R/W		XXXXXXXX
79E6H	Detect Address Setting 2	PADR2	R/W		XXXXXXXX
79E7H	Detect Address Setting 2	PADR2	R/W		XXXXXXXX
79E8H	Detect Address Setting 2	PADR2	R/W		XXXXXXXX
79E9H to 79EFH	Reserved				
79F0H	Detect Address Setting 3	PADR3	R/W	Address Match Detection 1	XXXXXXXX
79F1H	Detect Address Setting 3	PADR3	R/W		XXXXXXXX
79F2H	Detect Address Setting 3	PADR3	R/W		XXXXXXXX
79F3H	Detect Address Setting 4	PADR4	R/W		XXXXXXXX
79F4H	Detect Address Setting 4	PADR4	R/W		XXXXXXXX
79F5H	Detect Address Setting 4	PADR4	R/W		XXXXXXXX
79F6H	Detect Address Setting 5	PADR5	R/W		XXXXXXXX
79F7H	Detect Address Setting 5	PADR5	R/W		XXXXXXXX
79F8H	Detect Address Setting 5	PADR5	R/W		XXXXXXXX
79F9H to 79FFH	Reserved				
7A00H to 7AFFH	Reserved for CAN Interface 0. Refer to “■ CAN CONTROLLERS”				
7B00H to 7BFFH	Reserved for CAN Interface 0. Refer to “■ CAN CONTROLLERS”				
7C00H to 7CFFH	Reserved for CAN Interface 1. Refer to “■ CAN CONTROLLERS”				
7D00H to 7DFFH	Reserved for CAN Interface 1. Refer to “■ CAN CONTROLLERS”				
7E00H to 7EFFH	Reserved for CAN Interface 2. Refer to “■ CAN CONTROLLERS”				
7F00H to 7FFFH	Reserved for CAN Interface 2. Refer to “■ CAN CONTROLLERS”				

Notes : • Initial value of “X” represents unknown value.
• Any write access to reserved addresses in I/O map should not be performed. A read access to reserved addresses results in reading “X”.

■ CAN CONTROLLERS

The CAN controller has the following features :

- Conforms to CAN Specification Version 2.0 Part A and B
  - Supports transmission/reception in standard frame and extended frame formats
- Supports transmitting of data frames by receiving remote frames
- 16 transmitting/receiving message buffers
  - 29-bit ID and 8-byte data
  - Multi-level message buffer configuration
- Provides full-bit comparison, full-bit mask, acceptance register 0/acceptance register 1 for each message buffer as ID acceptance mask
  - Two acceptance mask registers in either standard frame format or extended frame formats
- Bit rate programmable from 10 Kbits/s to 2 Mbits/s (when input clock is at 16 MHz)

List of Control Registers (1)

Address			Register	Abbreviation	Access	Initial Value
CAN0	CAN1	CAN2				
000070H	000080H	0000E0H	Message buffer valid register	BVALR	R/W	00000000 00000000
000071H	000081H	0000E1H				
000072H	000082H	0000E2H	Transmit request register	TREQR	R/W	00000000 00000000
000073H	000083H	0000E3H				
000074H	000084H	0000E4H	Transmit cancel register	TCANR	W	00000000 00000000
000075H	000085H	0000E5H				
000076H	000086H	0000E6H	Transmission complete register	TCR	R/W	00000000 00000000
000077H	000087H	0000E7H				
000078H	000088H	0000E8H	Receive complete register	RCR	R/W	00000000 00000000
000079H	000089H	0000E9H				
00007AH	00008AH	0000EAH	Remote request receiving register	RRTRR	R/W	00000000 00000000
00007BH	00008BH	0000EBH				
00007CH	00008CH	0000ECH	Receive overrun register	ROVRR	R/W	00000000 00000000
00007DH	00008DH	0000EDH				
00007EH	00008EH	0000EEH	Reception interrupt enable register	RIER	R/W	00000000 00000000
00007FH	00008FH	0000EFH				

List of Control Registers (2)

Address			Register	Abbreviation	Access	Initial Value
CAN0	CAN1	CAN2				
007B00H	007D00H	007F00H	Control status register	CSR	R/W, W R/W, R	0XXXX0X1 00XXX000
007B01H	007D01H	007F01H				
007B02H	007D02H	007F02H	Last event indicator register	LEIR	R/W	000X0000 XXXXXXXX
007B03H	007D03H	007F03H				
007B04H	007D04H	007F04H	Receive and transmit error counter	RTEC	R	00000000 00000000
007B05H	007D05H	007F05H				
007B06H	007D06H	007F06H	Bit timing register	BTR	R/W	11111111 X1111111
007B07H	007D07H	007F07H				
007B08H	007D08H	007F08H	IDE register	IDER	R/W	XXXXXXXX XXXXXXXX
007B09H	007D09H	007F09H				
007B0AH	007D0AH	007F0AH	Transmit RTR register	TRTRR	R/W	00000000 00000000
007B0BH	007D0BH	007F0BH				
007B0CH	007D0CH	007F0CH	Remote frame receive waiting register	RFWTR	R/W	XXXXXXXX XXXXXXXX
007B0DH	007D0DH	007F0DH				
007B0EH	007D0EH	007F0EH	Transmit interrupt enable register	TIER	R/W	00000000 00000000
007B0FH	007D0FH	007F0FH				
007B10H	007D10H	007F10H	Acceptance mask select register	AMSR	R/W	XXXXXXXX XXXXXXXX
007B11H	007D11H	007F11H				
007B12H	007D12H	007F12H				XXXXXXXX XXXXXXXX
007B13H	007D13H	007F13H				
007B14H	007D14H	007F14H	Acceptance mask register 0	AMR0	R/W	XXXXXXXX XXXXXXXX
007B15H	007D15H	007F15H				
007B16H	007D16H	007F16H				XXXXXXXX XXXXXXXX
007B17H	007D17H	007F17H				
007B18H	007D18H	007F18H	Acceptance mask register 1	AMR1	R/W	XXXXXXXX XXXXXXXX
007B19H	007D19H	007F19H				
007B1AH	007D1AH	007F1AH				XXXXXXXX XXXXXXXX
007B1BH	007D1BH	007F1BH				

List of Message Buffers (ID Registers) (1)

Address			Register	Abbreviation	Access	Initial Value
CAN0	CAN1	CAN2				
007A00H to 007A1FH	007C00H to 007C1FH	007E00H to 007E1FH	General-purpose RAM	—	R/W	XXXXXXXX to XXXXXXXX
007A20H	007C20H	007E20H	ID register 0	IDR0	R/W	XXXXXXXX XXXXXXXX
007A21H	007C21H	007E21H				
007A22H	007C22H	007E22H				XXXXXXXX XXXXXXXX
007A23H	007C23H	007E23H				
007A24H	007C24H	007E24H	ID register 1	IDR1	R/W	XXXXXXXX XXXXXXXX
007A25H	007C25H	007E25H				
007A26H	007C26H	007E26H				XXXXXXXX XXXXXXXX
007A27H	007C27H	007E27H				
007A28H	007C28H	007E28H	ID register 2	IDR2	R/W	XXXXXXXX XXXXXXXX
007A29H	007C29H	007E29H				
007A2AH	007C2AH	007E2AH				XXXXXXXX XXXXXXXX
007A2BH	007C2BH	007E2BH				
007A2CH	007C2CH	007E2CH	ID register 3	IDR3	R/W	XXXXXXXX XXXXXXXX
007A2DH	007C2DH	007E2DH				
007A2EH	007C2EH	007E2EH				XXXXXXXX XXXXXXXX
007A2FH	007C2FH	007E2FH				
007A30H	007C30H	007E30H	ID register 4	IDR4	R/W	XXXXXXXX XXXXXXXX
007A31H	007C31H	007E31H				
007A32H	007C32H	007E32H				XXXXXXXX XXXXXXXX
007A33H	007C33H	007E33H				
007A34H	007C34H	007E34H	ID register 5	IDR5	R/W	XXXXXXXX XXXXXXXX
007A35H	007C35H	007E35H				
007A36H	007C36H	007E36H				XXXXXXXX XXXXXXXX
007A37H	007C37H	007E37H				
007A38H	007C38H	007E38H	ID register 6	IDR6	R/W	XXXXXXXX XXXXXXXX
007A39H	007C39H	007E39H				
007A3AH	007C3AH	007E3AH				XXXXXXXX XXXXXXXX
007A3BH	007C3BH	007E3BH				
007A3CH	007C3CH	007E3CH	ID register 7	IDR7	R/W	XXXXXXXX XXXXXXXX
007A3DH	007C3DH	007E3DH				
007A3EH	007C3EH	007E3EH				XXXXXXXX XXXXXXXX
007A3FH	007C3FH	007E3FH				

List of Message Buffers (ID Registers) (2)

Address			Register	Abbreviation	Access	Initial Value
CAN0	CAN1	CAN2				
007A40H	007C40H	007E40H	ID register 8	IDR8	R/W	XXXXXXXX XXXXXXXX
007A41H	007C41H	007E41H				
007A42H	007C42H	007E42H				XXXXXXXX XXXXXXXX
007A43H	007C43H	007E43H				
007A44H	007C44H	007E44H	ID register 9	IDR9	R/W	XXXXXXXX XXXXXXXX
007A45H	007C45H	007E45H				
007A46H	007C46H	007E46H				XXXXXXXX XXXXXXXX
007A47H	007C47H	007E47H				
007A48H	007C48H	007E48H	ID register 10	IDR10	R/W	XXXXXXXX XXXXXXXX
007A49H	007C49H	007E49H				
007A4AH	007C4AH	007E4AH				XXXXXXXX XXXXXXXX
007A4BH	007C4BH	007E4BH				
007A4CH	007C4CH	007E4CH	ID register 11	IDR11	R/W	XXXXXXXX XXXXXXXX
007A4DH	007C4DH	007E4DH				
007A4EH	007C4EH	007E4EH				XXXXXXXX XXXXXXXX
007A4FH	007C4FH	007E4FH				
007A50H	007C50H	007E50H	ID register 12	IDR12	R/W	XXXXXXXX XXXXXXXX
007A51H	007C51H	007E51H				
007A52H	007C52H	007E52H				XXXXXXXX XXXXXXXX
007A53H	007C53H	007E53H				
007A54H	007C54H	007E54H	ID register 13	IDR13	R/W	XXXXXXXX XXXXXXXX
007A55H	007C55H	007E55H				
007A56H	007C56H	007E56H				XXXXXXXX XXXXXXXX
007A57H	007C57H	007E57H				
007A58H	007C58H	007E58H	ID register 14	IDR14	R/W	XXXXXXXX XXXXXXXX
007A59H	007C59H	007E59H				
007A5AH	007C5AH	007E5AH				XXXXXXXX XXXXXXXX
007A5BH	007C5BH	007E5BH				
007A5CH	007C5CH	007E5CH	ID register 15	IDR15	R/W	XXXXXXXX XXXXXXXX
007A5DH	007C5DH	007E5DH				
007A5EH	007C5EH	007E5EH				XXXXXXXX XXXXXXXX
007A5FH	007C5FH	007E5FH				

List of Message Buffers (DLC Registers and Data Registers) (1)

Address			Register	Abbreviation	Access	Initial Value
CAN0	CAN1	CAN2				
007A60H	007C60H	007E60H	DLC register 0	DLCR0	R/W	XXXXXXXX
007A61H	007C61H	007E61H				
007A62H	007C62H	007E62H	DLC register 1	DLCR1	R/W	XXXXXXXX
007A63H	007C63H	007E63H				
007A64H	007C64H	007E64H	DLC register 2	DLCR2	R/W	XXXXXXXX
007A65H	007C65H	007E65H				
007A66H	007C66H	007E66H	DLC register 3	DLCR3	R/W	XXXXXXXX
007A67H	007C67H	007E67H				
007A68H	007C68H	007E68H	DLC register 4	DLCR4	R/W	XXXXXXXX
007A69H	007C69H	007E69H				
007A6AH	007C6AH	007E6AH	DLC register 5	DLCR5	R/W	XXXXXXXX
007A6BH	007C6BH	007E6BH				
007A6CH	007C6CH	007E6CH	DLC register 6	DLCR6	R/W	XXXXXXXX
007A6DH	007C6DH	007E6DH				
007A6EH	007C6EH	007E6EH	DLC register 7	DLCR7	R/W	XXXXXXXX
007A6FH	007C6FH	007E6FH				
007A70H	007C70H	007E70H	DLC register 8	DLCR8	R/W	XXXXXXXX
007A71H	007C71H	007E71H				
007A72H	007C72H	007E72H	DLC register 9	DLCR9	R/W	XXXXXXXX
007A73H	007C73H	007E73H				
007A74H	007C74H	007E74H	DLC register 10	DLCR10	R/W	XXXXXXXX
007A75H	007C75H	007E75H				
007A76H	007C76H	007E76H	DLC register 11	DLCR11	R/W	XXXXXXXX
007A77H	007C77H	007E77H				
007A78H	007C78H	007E78H	DLC register 12	DLCR12	R/W	XXXXXXXX
007A79H	007C79H	007E79H				
007A7AH	007C7AH	007E7AH	DLC register 13	DLCR13	R/W	XXXXXXXX
007A7BH	007C7BH	007E7BH				
007A7CH	007C7CH	007E7CH	DLC register 14	DLCR14	R/W	XXXXXXXX
007A7DH	007C7DH	007E7DH				
007A7EH	007C7EH	007E7EH	DLC register 15	DLCR15	R/W	XXXXXXXX
007A7FH	007C7FH	007E7FH				

List of Message Buffers (DLC Registers and Data Registers) (2)

Address			Register	Abbreviation	Access	Initial Value
CAN0	CAN1	CAN2				
007A80H to 007A87H	007C80H to 007C87H	007E80H to 007E87H	Data register 0 (8 bytes)	DTR0	R/W	XXXXXXXX to XXXXXXXX
007A88H to 007A8FH	007C88H to 007C8FH	007E88H to 007E8FH	Data register 1 (8 bytes)	DTR1	R/W	XXXXXXXX to XXXXXXXX
007A90H to 007A97H	007C90H to 007C97H	007E90H to 007E97H	Data register 2 (8 bytes)	DTR2	R/W	XXXXXXXX to XXXXXXXX
007A98H to 007A9FH	007C98H to 007C9FH	007E98H to 007E9FH	Data register 3 (8 bytes)	DTR3	R/W	XXXXXXXX to XXXXXXXX
007AA0H to 007AA7H	007CA0H to 007CA7H	007EA0H to 007EA7H	Data register 4 (8 bytes)	DTR4	R/W	XXXXXXXX to XXXXXXXX
007AA8H to 007AAFH	007CA8H to 007CAFH	007EA8H to 007EAFH	Data register 5 (8 bytes)	DTR5	R/W	XXXXXXXX to XXXXXXXX
007AB0H to 007AB7H	007CB0H to 007CB7H	007EB0H to 007EB7H	Data register 6 (8 bytes)	DTR6	R/W	XXXXXXXX to XXXXXXXX
007AB8H to 007ABFH	007CB8H to 007CBFH	007EB8H to 007EBFH	Data register 7 (8 bytes)	DTR7	R/W	XXXXXXXX to XXXXXXXX
007AC0H to 007AC7H	007CC0H to 007CC7H	007EC0H to 007EC7H	Data register 8 (8 bytes)	DTR8	R/W	XXXXXXXX to XXXXXXXX
007AC8H to 007ACFH	007CC8H to 007CCFH	007EC8H to 007ECFH	Data register 9 (8 bytes)	DTR9	R/W	XXXXXXXX to XXXXXXXX
007AD0H to 007AD7H	007CD0H to 007CD7H	007ED0H to 007ED7H	Data register 10 (8 bytes)	DTR10	R/W	XXXXXXXX to XXXXXXXX
007AD8H to 007ADFH	007CD8H to 007CDFH	007ED8H to 007EDFH	Data register 11 (8 bytes)	DTR11	R/W	XXXXXXXX to XXXXXXXX
007AE0H to 007AE7H	007CE0H to 007CE7H	007EE0H to 007EE7H	Data register 12 (8 bytes)	DTR12	R/W	XXXXXXXX to XXXXXXXX
007AE8H to 007AEFH	007CE8H to 007CEFH	007EE8H to 007EEFH	Data register 13 (8 bytes)	DTR13	R/W	XXXXXXXX to XXXXXXXX

List of Message Buffers (DLC Registers and Data Registers) (3)

Address			Register	Abbreviation	Access	Initial Value
CAN0	CAN1	CAN2				
007AF0H to 007AF7H	007CF0H to 007CF7H	007EF0H to 007EF7H	Data register 14 (8 bytes)	DTR14	R/W	XXXXXXXX to XXXXXXXX
007AF8H to 007AFFH	007CF8H to 007CFFH	007EF8H to 007EFFH	Data register 15 (8 bytes)	DTR15	R/W	XXXXXXXX to XXXXXXXX

■ INTERRUPT FACTORS, INTERRUPT VECTORS, INTERRUPT CONTROL REGISTER

Interrupt cause	EI²OS clear	DMA ch number	Interrupt vector		Interrupt control register	
			Number	Address	Number	Address
Reset	N	—	#08	FFFFDC$_H$	—	—
INT9 instruction	N	—	#09	FFFFD8$_H$	—	—
Exception	N	—	#10	FFFFD4$_H$	—	—
CAN 0 RX	N	—	#11	FFFFD0$_H$	ICR00	0000B0$_H$
CAN 0 TX/NS	N	—	#12	FFFFCC$_H$		
CAN 1 RX / Input Capture 6	Y1	—	#13	FFFFC8$_H$	ICR01	0000B1$_H$
CAN 1 TX/NS / Input Capture 7	Y1	—	#14	FFFFC4$_H$		
CAN 2 RX / I²C0	N	—	#15	FFFFC0$_H$	ICR02	0000B2$_H$
CAN 2 TX/NS	N	—	#16	FFFFBC$_H$		
16-bit Reload Timer 0	Y1	0	#17	FFFFB8$_H$	ICR03	0000B3$_H$
16-bit Reload Timer 1	Y1	1	#18	FFFFB4$_H$		
16-bit Reload Timer 2	Y1	2	#19	FFFFB0$_H$	ICR04	0000B4$_H$
16-bit Reload Timer 3	Y1	—	#20	FFFFAC$_H$		
PPG 0/1/4/5	N	—	#21	FFFFA8$_H$	ICR05	0000B5$_H$
PPG 2/3/6/7	N	—	#22	FFFFA4$_H$		
PPG 8/9/C/D	N	—	#23	FFFFA0$_H$	ICR06	0000B6$_H$
PPG A/B/E/F	N	—	#24	FFFF9C$_H$		
Time Base Timer	N	—	#25	FFFF98$_H$	ICR07	0000B7$_H$
External Interrupt 0 to 3, 8 to 11	Y1	3	#26	FFFF94$_H$		
Watch Timer	N	—	#27	FFFF90$_H$	ICR08	0000B8$_H$
External Interrupt 4 to 7, 12 to 15	Y1	4	#28	FFFF8C$_H$		
A/D Converter	Y1	5	#29	FFFF88$_H$	ICR09	0000B9$_H$
I/O Timer 0 / I/O Timer 1	N	—	#30	FFFF84$_H$		
Input Capture 4/5 / I²C1	Y1	6	#31	FFFF80$_H$	ICR10	0000BA$_H$
Output Compare 0/1/4/5	Y1	7	#32	FFFF7C$_H$		
Input Capture 0 to 3	Y1	8	#33	FFFF78$_H$	ICR11	0000BB$_H$
Output Compare 2/3/6/7	Y1	9	#34	FFFF74$_H$		
UART 0 RX	Y2	10	#35	FFFF70$_H$	ICR12	0000BC$_H$
UART 0 TX	Y1	11	#36	FFFF6C$_H$		
UART 1 RX / UART 3 RX	Y2	12	#37	FFFF68$_H$	ICR13	0000BD$_H$
UART 1 TX / UART 3 TX	Y1	13	#38	FFFF64$_H$		

(Continued)

(Continued)

Interrupt cause	EI²OS clear	DMA ch number	Interrupt vector		Interrupt control register	
			Number	Address	Number	Address
UART 2 RX / UART 4 RX	Y2	14	#39	FFFF60H	ICR14	0000BEH
UART 2 TX / UART 4 TX	Y1	15	#40	FFFF5CH		
Flash Memory	N	—	#41	FFFF58H	ICR15	0000BFH
Delayed interrupt	N	—	#42	FFFF54H		

Y1 : Usable

Y2 : Usable, with EI²OS stop function

N : Unusable

Notes :
- The peripheral resources sharing the ICR register have the same interrupt level.
- When two peripheral resources share the ICR register, only one can use Extended Intelligent I/O Service at a time.
- When either of the two peripheral resources sharing the ICR register specifies Extended Intelligent I/O Service, the other one cannot use interrupts.

■ ELECTRICAL CHARACTERISTICS

1. Absolute Maximum Ratings

(V_{SS} = AV_{SS} = 0 V)

Parameter	Symbol	Rating		Unit	Remarks
		Min	Max		
Power supply voltage	V_{CC}	V_{SS} – 0.3	V_{SS} + 6.0	V	
	AV_{CC}	V_{SS} – 0.3	V_{SS} + 6.0	V	V_{CC} = AV_{CC}*1
	AVRH, AVRL	V_{SS} – 0.3	V_{SS} + 6.0	V	AV_{CC} ≥ AVRH, AV_{CC} ≥ AVRL, AVRH ≥ AVRL
Input voltage	V_I	V_{SS} – 0.3	V_{SS} + 6.0	V	*2
Output voltage	V_O	V_{SS} – 0.3	V_{SS} + 6.0	V	*2
Maximum Clamp Current	I_{CLAMP}	–4.0	+4.0	mA	*4
Total Maximum Clamp Current	$\Sigma\|I_{CLAMP}\|$	—	40	mA	*4
“L” level maximum output current	I_{OL}	—	15	mA	*3
“L” level average output current	I_{OLAV}	—	4	mA	*3
“L” level maximum overall output current	ΣI_{OL}	—	100	mA	*3
“L” level average overall output current	ΣI_{OLAV}	—	50	mA	*3
“H” level maximum output current	I_{OH}	—	–15	mA	*3
“H” level average output current	I_{OHAV}	—	–4	mA	*3
“H” level maximum overall output current	ΣI_{OH}	—	–100	mA	*3
“H” level average overall output current	ΣI_{OHAV}	—	–50	mA	*3
Power consumption	P_D	—	340	mW	MB90F347
Operating temperature	T_A	–40	+105	°C	
Storage temperature	T_{STG}	–55	+150	°C	

(Continued)

(Continued)

*1: Set AV_{CC} and V_{CC} to the same voltage. Make sure that AV_{CC} does not exceed V_{CC} and that the voltage at the analog inputs does not exceed AV_{CC} when the power is switched on.


*2: V_I and V_O should not exceed V_{CC} + 0.3 V. V_I should not exceed the specified ratings. However if the maximun current to/from an input is limited by some means with external components, the I_{CLAMP} rating supercedes the V_I rating.

*3: Applicable to pins : P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P47, P50 to P57, P60 to P67, P70 to P77, P80 to P87, P90 to P97, PA0 to PA1

*4: • Applicable to pins: P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P47, P50 to P57 (EVA device : P50 to P55) , P60 to P67, P70 to P77, P80 to P87, P90 to P97, PA0 to PA1

- Use within recommended operating conditions.
- Use at DC voltage (current)
- The +B signal should always be applied a limiting resistance placed between the +B signal and the microcontroller.
- The value of the limiting resistance should be set so that when the +B signal is applied the input current to the microcontroller pin does not exceed rated values, either instantaneously or for prolonged periods.
- Note that when the microcontroller drive current is low, such as in the power saving modes, the +B input potential may pass through the protective diode and increase the potential at the V_{CC} pin, and this may affect other devices.
- Note that if a +B signal is input when the microcontroller power supply is off (not fixed at 0 V) , the power supply is provided from the pins, so that incomplete operation may result.
- Note that if the +B input is applied during power-on, the power supply is provided from the pins and the resulting supply voltage may not be sufficient to operate the power-on reset.
- Care must be taken not to leave the +B input pin open.
- Sample recommended circuits:

• Input/output equivalent circuits

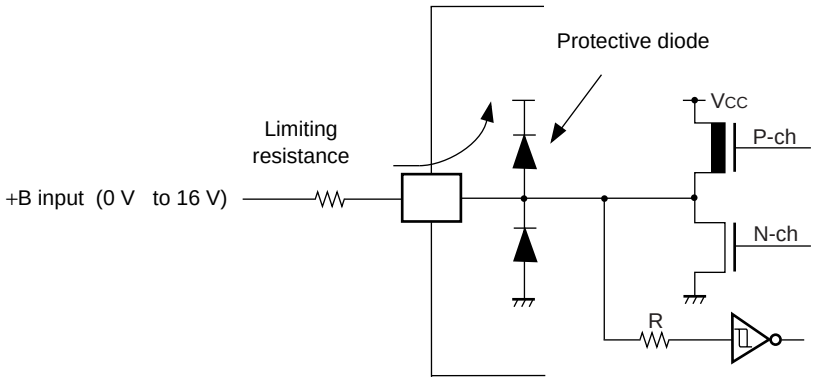


WARNING: Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

2. Recommended Conditions

(V_{SS} = AV_{SS} = 0 V)

Parameter	Symbol	Value			Unit	Remarks
		Min	Typ	Max		
Power supply voltage	V_{CC}, AV_{CC}	4.0	5.0	5.5	V	Under normal operation
		3.5	5.0	5.5	V	Under normal operation, when not using the A/D converter and not Flash programming.
		4.5	5.0	5.5	V	When External bus is used.
		3.0	—	5.5	V	Maintains RAM data in stop mode
Smooth capacitor	C_S	0.1	—	1.0	µF	Use a ceramic capacitor or capacitor of better AC characteristics. Capacitor at the V_{CC} should be greater than this capacitor.
Operating temperature	T_A	–40	—	+105	°C	

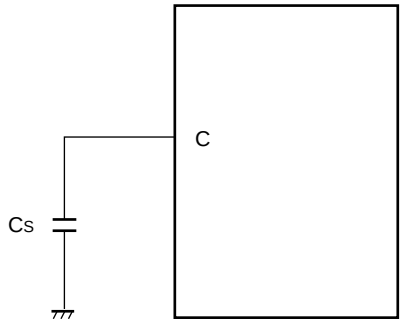

C Pin Connection Diagram

WARNING: The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use semiconductor devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their FUJITSU representatives beforehand.

3. DC Characteristics

(T_A = –40 °C to +105 °C, V_{CC} = 5.0 V ± 10%, f_{CP} ≤ 24 MHz, V_{SS} = AV_{SS} = 0 V)

Parameter	Symbol	Pin	Condition	Value			Unit	Remarks
				Min	Typ	Max		
Input H voltage (At V_{CC} = 5 V ± 10%)	V_{IHS}	—	—	0.8 V_{CC}	—	V_{CC} + 0.3	V	Port inputs if CMOS hysteresis input levels are selected (except P12, P44, P45, P46, P47, P50, P82, P83)
	V_{IHA}	—	—	0.8 V_{CC}	—	V_{CC} + 0.3	V	Port inputs if AUTOMOTIVE input levels are selected
	V_{IHT}	—	—	2.0	—	V_{CC} + 0.3	V	Port inputs if TTL input levels are selected
	V_{IHS}	—	—	0.7 V_{CC}	—	V_{CC} + 0.3	V	P12, P50, P82, P85 inputs if CMOS input levels are selected
	V_{IHI}	—	—	0.7 V_{CC}	—	V_{CC} + 0.3	V	P44, P45, P46, P47 inputs if CMOS hysteresis input levels are selected
	V_{IHR}	—	—	0.8 V_{CC}	—	V_{CC} + 0.3	V	$\overline{RST}$ input pin (CMOS hysteresis)
	V_{IHM}	—	—	V_{CC} – 0.3	—	V_{CC} + 0.3	V	MD input pin
Input L voltage (At V_{CC} = 5 V ± 10%)	V_{ILS}	—	—	V_{SS} – 0.3	—	0.2 V_{CC}	V	Port inputs if CMOS hysteresis input levels are selected (except P12, P44, P45, P46, P47, P50, P82, P83)
	V_{ILA}	—	—	V_{SS} – 0.3	—	0.5 V_{CC}	V	Port inputs if AUTOMOTIVE input levels are selected
	V_{ILT}	—	—	V_{SS} – 0.3	—	0.8	V	Port inputs if TTL input levels are selected
	V_{ILS}	—	—	V_{SS} – 0.3	—	0.3 V_{CC}	V	P12, P50, P82, P85 inputs if CMOS input levels are selected
	V_{ILI}	—	—	V_{SS} – 0.3	—	0.3 V_{CC}	V	P44, P45, P46, P47 inputs if CMOS hysteresis input levels are selected
	V_{ILR}	—	—	V_{SS} – 0.3	—	0.2 V_{CC}	V	$\overline{RST}$ input pin (CMOS hysteresis)
	V_{ILM}	—	—	V_{SS} – 0.3	—	V_{SS} + 0.3	V	MD input pin
Output H voltage	V_{OH}	Normal outputs	V_{CC} = 4.5 V, I_{OH} = –4.0 mA	V_{CC} – 0.5	—	—	V	
Output H voltage	V_{OHI}	I^2C current outputs	V_{CC} = 4.5 V, I_{OH} = –3.0 mA	V_{CC} – 0.5	—	—	V	
Output L voltage	V_{OL}	Normal outputs	V_{CC} = 4.5 V, I_{OL} = 4.0 mA	—	—	0.4	V	
Output L voltage	V_{OLI}	I^2C current outputs	V_{CC} = 4.5 V, I_{OL} = 3.0 mA	—	—	0.4	V	

(Continued)

(Continued)

(T_A = −40 °C to +105 °C, V_{CC} = 5.0 V ± 10%, f_{CP} ≤ 24 MHz, V_{SS} = AV_{SS} = 0 V)

Parameter	Symbol	Pin	Condition	Value			Unit	Remarks
				Min	Typ	Max		
Input leak current	I_{IL}	—	V_{CC} = 5.5 V, V_{SS} < V_I < V_{CC}	–1	—	1	µA	
Pull-up resistance	R_{UP}	P00 to P07, P10 to P17, P20 to P27, P30 to P37, $\overline{RST}$	—	25	50	100	kΩ	
Pull-down resistance	R_{DOWN}	MD2	—	25	50	100	kΩ	Except Flash devices
Power supply current*	I_{CC}	V_{CC}	V_{CC} = 5.0 V, Internal frequency : 24 MHz, At normal operation.	—	55	70	mA	
			V_{CC} = 5.0 V, Internal frequency : 24 MHz, At writing FLASH memory.	—	70	85	mA	Flash devices
			V_{CC} = 5.0 V, Internal frequency : 24 MHz, At erasing FLASH memory.	—	75	90	mA	Flash devices
	I_{CCS}		V_{CC} = 5.0 V, Internal frequency : 24 MHz, At Sleep mode.	—	25	35	mA	
	I_{CTS}		V_{CC} = 5.0 V, Internal frequency : 2 MHz, At Main Timer mode	—	0.3	0.8	mA	
	$I_{CTSPLL6}$		V_{CC} = 5.0 V, Internal frequency : 24 MHz, At PLL Timer mode, external frequency = 4 MHz	—	4	7	mA	
	I_{CCL}		V_{CC} = 5.0V Internal frequency: 8 kHz, At sub operation T_A = +25°C	—	70	140	µA	
	I_{CCLS}		V_{CC} = 5.0V Internal frequency: 8 kHz, At sub sleep T_A = +25°C	—	20	50	µA	
	I_{CCT}		V_{CC} = 5.0V Internal frequency: 8 kHz, At watch mode T_A = +25°C	—	10	35	µA	
	I_{CCH}		V_{CC} = 5.0 V, At Stop mode, T_A = +25°C	—	7	25	µA	
Input capacity	C_{IN}	Other than C, AV_{CC}, AV_{SS}, AVRH, AVRL, V_{CC}, V_{SS},	—	—	5	15	pF	

* : The power supply current is measured with an external clock.


4. AC Characteristics

(1) Clock Timing


(T_A = –40 °C to +105 °C, V_{CC} = 5.0 V ± 10%, f_{CP} ≤ 24 MHz, V_{SS} = AV_{SS} = 0 V)

Parameter	Symbol	Pin	Value			Unit	Remarks
			Min	Typ	Max		
Clock frequency	f_C	X0, X1	3	—	16	MHz	When using an oscillation circuit
		X0, X1	3	—	24	MHz	When using an external clock*
	f_{CL}	X0A, X1A	—	32.768	100	kHz	
Clock cycle time	t_{CYL}	X0, X1	62.5	—	333	ns	When using an oscillation circuit
		X0, X1	41.67	—	333	ns	When using an external clock
	t_{CYLL}	X0A, X1A	10	30.5	—	µs	
Input clock pulse width	P_{WH}, P_{WL}	X0	10	—	—	ns	Duty ratio is about 30% to 70%.
	P_{WHL}, P_{WLL}	X0A	5	15.2	—	µs	
Input clock rise and fall time	t_{CR}, t_{CF}	X0	—	—	5	ns	When using external clock
Internal operating clock frequency (machine clock)	f_{CP}	—	1.5	—	24	MHz	When using main clock
	f_{CPL}	—	—	8.192	50	kHz	When using sub clock
Internal operating clock cycle time (machine clock)	t_{CP}	—	41.67	—	666	ns	When using main clock
	t_{CPL}	—	20	122.1	—	µs	When using sub clock


* : Whem selecting the PLL clock, the range of clock frequency is limitted. Use this product within range as mentioned in “Relation among external clock frequency and machine clock frequency”.

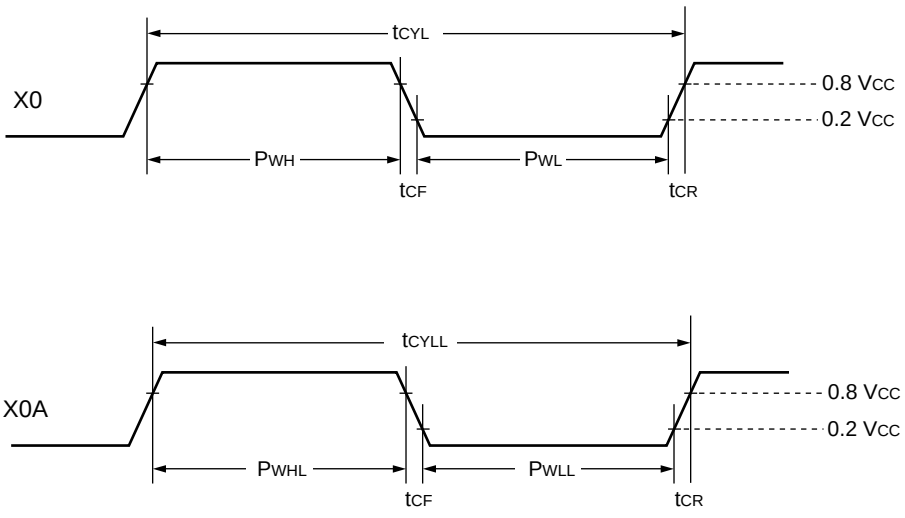

Clock Timing

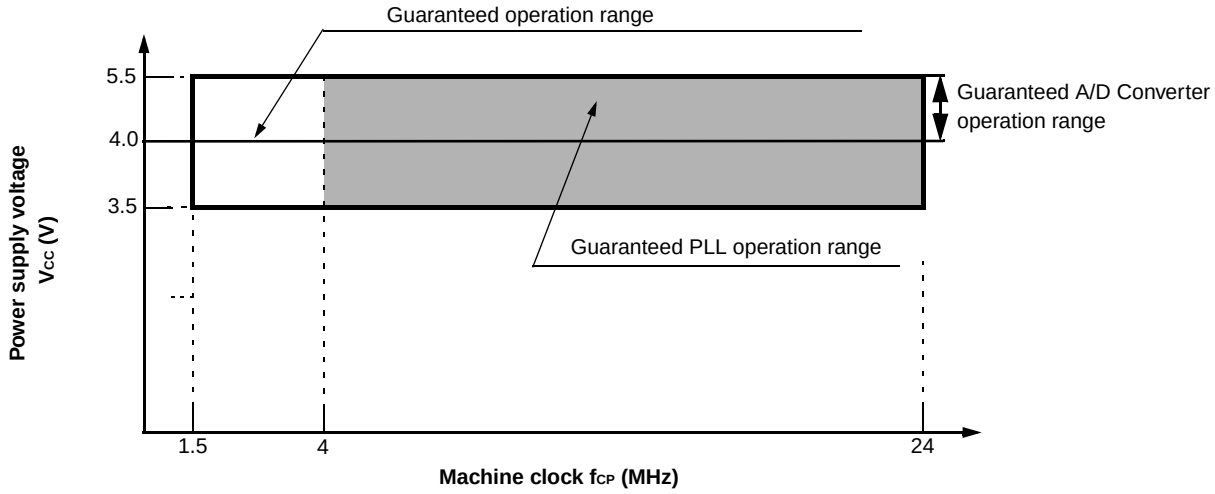

Guaranteed operation range of MB90340 series

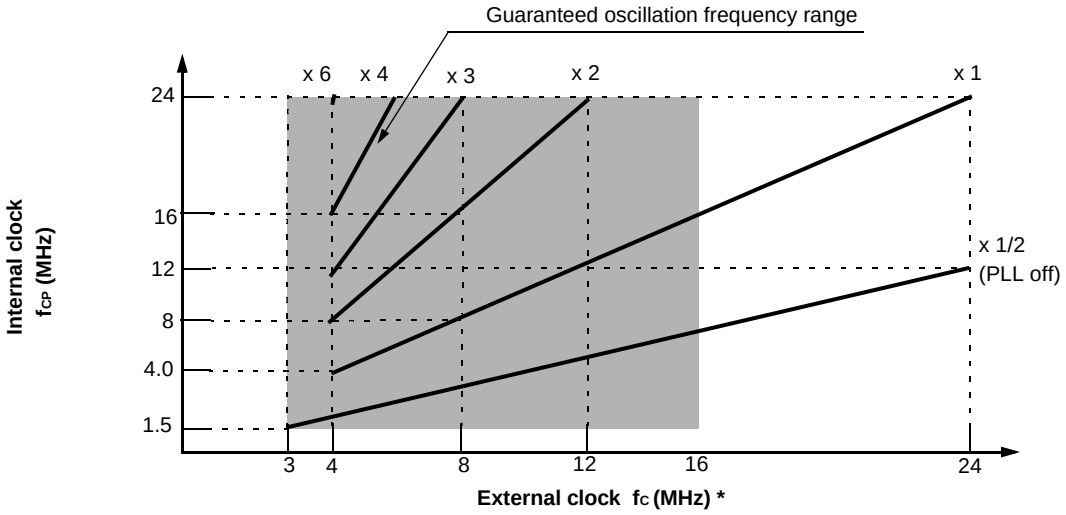

* : When using the oscillation circuit, the maximum oscillation clock frequency is 16 MHz

External clock frequency and Machine clock frequency


(2) Reset Standby Input

(T_A = –40 °C to +105 °C, V_{CC} = 5.0 V ± 10%, f_{CP} ≤ 24 MHz, V_{SS} = AV_{SS} = 0.0 V)


Parameter	Symbol	Pin	Value		Unit	Remarks
			Min	Max		
Reset input time	t_{RSTL}	$\overline{RST}$	500	—	ns	Under normal operation
			Oscillation time of oscillator* + 100 µs	—	ns	In Stop mode, Sub Clock mode, Sub Sleep mode and Watch mode
			100	—	µs	In Time Timer mode

* : Oscillation time of oscillator is the time that the amplitude reaches 90%.
In the crystal oscillator, the oscillation time is between several ms and to tens of ms. In FAR / ceramic oscillators, the oscillation time is between hundreds of µs to several ms. With an external clock, the oscillation time is 0 ms.

Under normal operation:

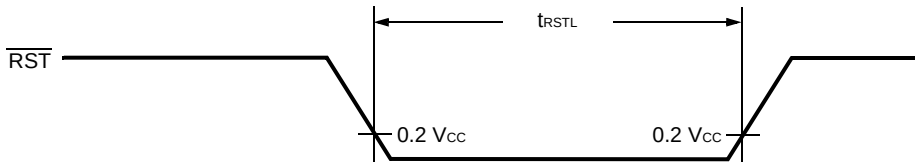


In Stop mode, Sub Clock mode, Sub Sleep mode, Watch mode:

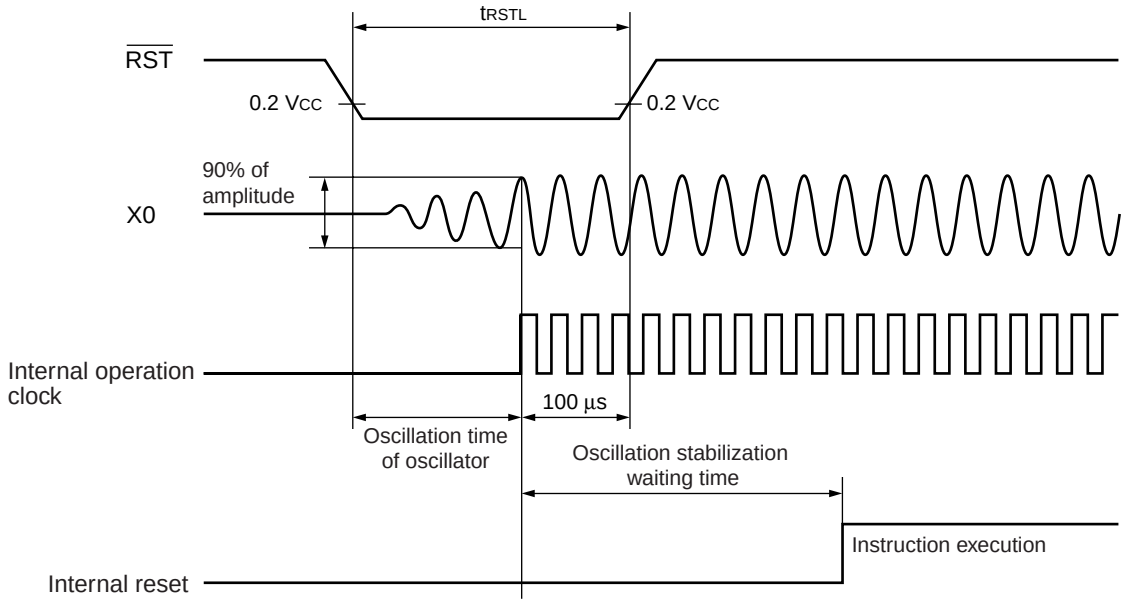


(3) Power On Reset

(T_A = –40 °C to +105 °C, V_{CC} = 5.0 V ± 10%, f_{CP} ≤ 24 MHz, V_{SS} = AV_{SS} = 0.0 V)

Parameter	Symbol	Pin	Condition	Value		Unit	Remarks
				Min	Max		
Power on rise time	t_R	V_{CC}	—	0.05	30	ms	
Power off time	t_{OFF}	V_{CC}		1	—	ms	Due to repetitive operation

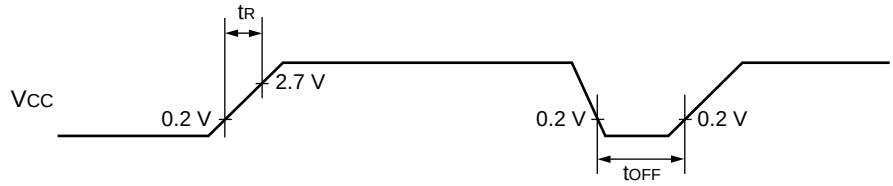


If you change the power supply voltage too rapidly, a power on reset may occur. We recommend that you startup smoothly by restraining voltages when changing the power supply voltage during operation, as shown in the figure below. Perform while not using the PLL clock. However, if voltage drops are within 1 V/s, you can operate while using the PLL clock.

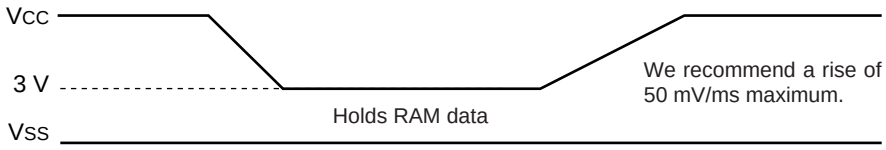

(4) Clock Output Timing

(T_A = –40 °C to +105 °C, V_{CC} = 5.0 V ± 10%, V_{SS} = 0.0 V, f_{CP} ≤ 24 MHz)


Parameter	Symbol	Pin	Condition	Value		Unit	Remarks
				Min	Max		
Cycle time	t_{CYC}	CLK	—	62.5	—	ns	f_{CP} = 16 MHz
				41.76	—	ns	f_{CP} = 24 MHz
CLK ↑ → CLK ↓	t_{CHCL}	CLK	—	20	—	ns	f_{CP} = 16 MHz
				13	—	ns	f_{CP} = 24 MHz

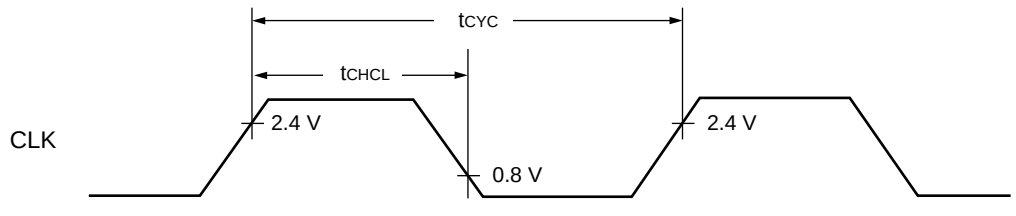

(5) Bus Timing (Read)

(T_A = –40 °C to +105 °C, V_{CC} = 5.0 V ± 10%, V_{SS} = 0.0 V, f_{CP} ≤ 24 MHz)


Parameter	Sym-bol	Pin	Condition	Value		Unit	Remarks
				Min	Max		
ALE pulse width	t_{LHLL}	ALE	—	$t_{CP}/2 - 10$	—	ns	
Valid address ⇒ ALE ↓ time	t_{AVLL}	ALE, A23 to A16, AD15 to AD00		$t_{CP}/2 - 20$	—	ns	
ALE ↓ ⇒ Address valid time	t_{LLAX}	ALE, AD15 to AD00		$t_{CP}/2 - 15$	—	ns	
Valid address ⇒ $\overline{RD}$ ↓ time	t_{AVRL}	A23 to A16, AD15 to AD00, $\overline{RD}$		$t_{CP} - 15$	—	ns	
Valid address ⇒ Valid data input	t_{AVDV}	A23 to A16, AD15 to AD00		—	$5\ t_{CP}/2 - 60$	ns	
$\overline{RD}$ pulse width	t_{RLRH}	$\overline{RD}$		$3\ t_{CP}/2 - 20$	—	ns	
$\overline{RD}$ ↓ ⇒ Valid data input	t_{RLDV}	$\overline{RD}$, AD15 to AD00		—	$3\ t_{CP}/2 - 50$	ns	
$\overline{RD}$ ↑ ⇒ Data hold time	t_{RHDX}	$\overline{RD}$, AD15 to AD00		0	—	ns	
$\overline{RD}$ ↓ ⇒ ALE ↑ time	t_{RHLH}	$\overline{RD}$, ALE		$t_{CP}/2 - 15$	—	ns	
$\overline{RD}$ ↑ ⇒ Address valid time	t_{RHAX}	$\overline{RD}$, A23 to A16		$t_{CP}/2 - 10$	—	ns	
Valid address ⇒ CLK ↑ time	t_{AVCH}	A23 to A16, AD15 to AD00, CLK		$t_{CP}/2 - 16$	—	ns	
$\overline{RD}$ ↓ ⇒ CLK ↑ time	t_{RLCH}	$\overline{RD}$, CLK		$t_{CP}/2 - 15$	—	ns	
ALE ↓ ⇒ $\overline{RD}$ ↓ time	t_{LLRL}	ALE, $\overline{RD}$		$t_{CP}/2 - 15$	—	ns	

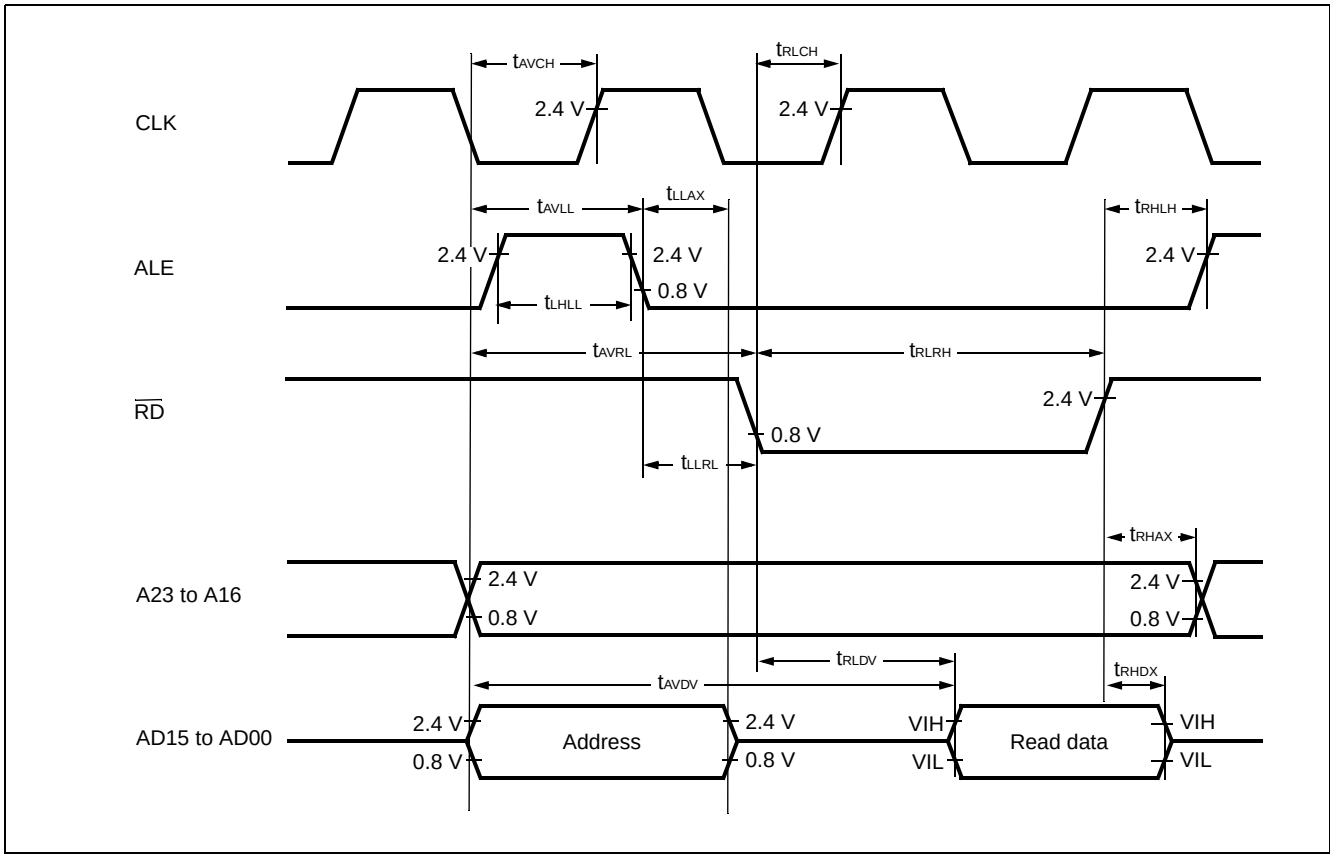

(6) Bus Timing (Write)

(T_A = –40 °C to +105 °C, V_{CC} = 5.0 V ± 10%, V_{SS} = 0.0 V, f_{CP} ≤ 24 MHz)

Parameter	Symbol	Pin	Condition	Value		Unit	Remarks
				Min	Max		
Valid address ⇒ $\overline{WR}$ ↓ time	t_{AVWL}	A23 to A16, AD15 to AD00, $\overline{WR}$	—	t_{CP}–15	—	ns	
$\overline{WR}$ pulse width	t_{WLWH}	$\overline{WR}$		3 t_{CP}/2 – 20	—	ns	
Valid data output ⇒ $\overline{WR}$ ↑ time	t_{DVWH}	AD15 to AD00, $\overline{WR}$		3 t_{CP}/2 – 20	—	ns	
$\overline{WR}$ ↑ ⇒ Data hold time	t_{WHDX}	AD15 to AD00, $\overline{WR}$		15	—	ns	
$\overline{WR}$ ↑ ⇒ Address valid time	t_{WHAX}	A23 to A16, $\overline{WR}$		t_{CP}/2 – 10	—	ns	
$\overline{WR}$ ↑ ⇒ ALE ↑ time	t_{WHLH}	$\overline{WR}$, ALE		t_{CP}/2 – 15	—	ns	
$\overline{WR}$ ↓ ⇒ CLK ↑ time	t_{WLCH}	$\overline{WR}$, CLK		t_{CP}/2 – 15	—	ns	

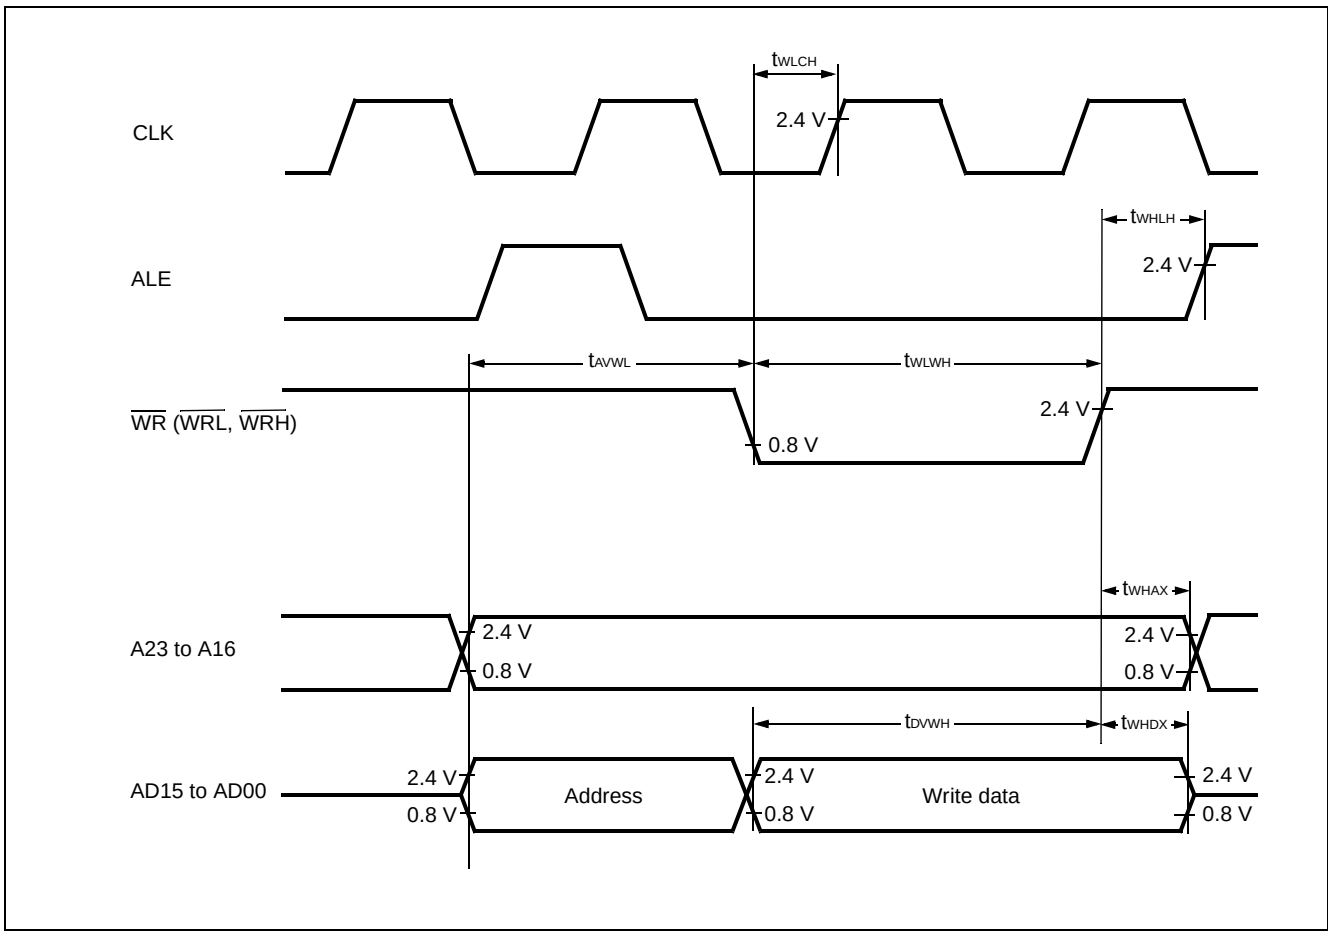


(7) Ready Input Timing

(T_A = –40 °C to +105 °C, V_{CC} = 5.0 V ± 10%, V_{SS} = 0.0 V, f_{CP} ≤ 24 MHz)

Parameter	Symbol	Pin	Test Condition	Rated Value		Units	Remarks
				Min	Max		
RDY setup time	t_{RYHS}	RDY	—	45	—	ns	f_{CP} = 16 MHz
				32	—	ns	f_{CP} = 24 MHz
RDY hold time	t_{RYHH}	RDY		0	—	ns	

Note : If the RDY setup time is insufficient, use the auto-ready function.

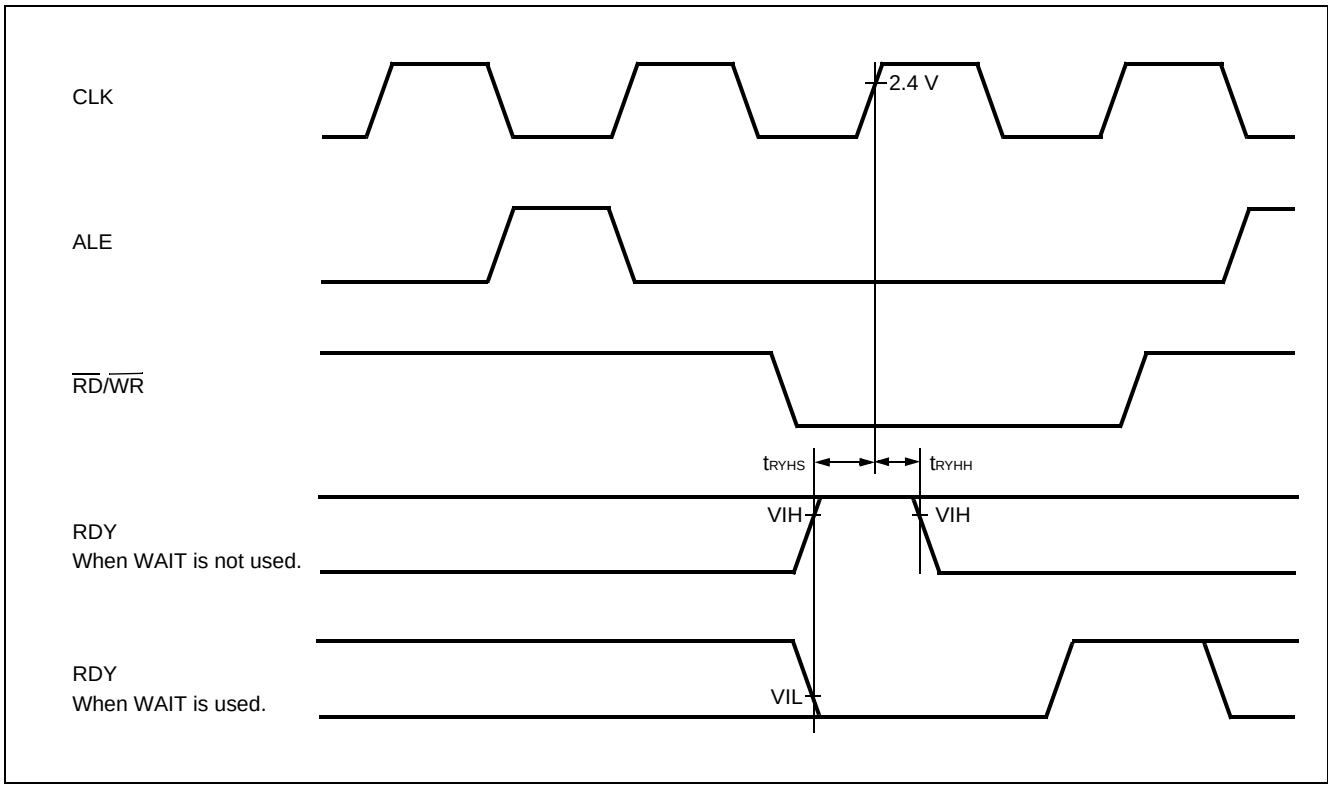


(8) Hold Timing

(T_A = –40 °C to +105 °C, V_{CC} = 5.0 V ± 10%, V_{SS} = 0.0 V, f_{CP} ≤ 24 MHz)

Parameter	Symbol	Pin	Condition	Value		Units	Remarks
				Min	Max		
Pin floating ⇒ $\overline{HAK}$ ↓ time	t_{XHAL}	$\overline{HAK}$	—	30	t_{CP}	ns	
$\overline{HAK}$ ↑ time ⇒ Pin valid time	t_{HAHV}	$\overline{HAK}$		t_{CP}	2 t_{CP}	ns	

Note : There is more than 1 cycle from when HRQ reads in until the $\overline{HAK}$ is changed.

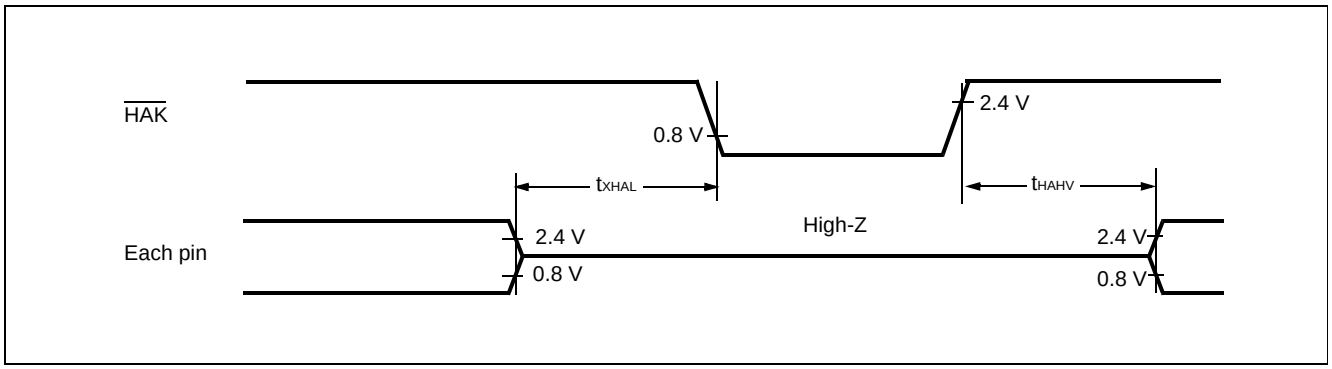


(9) UART0/1/2/3/4


(T_A = –40 °C to +105 °C, V_{CC} = 5.0 V ± 10%, V_{SS} = 0.0 V, f_{CP} ≤ 24 MHz)

Parameter	Symbol	Pin	Condition	Value		Unit	Remarks
				Min	Max		
Serial clock cycle time	t_{SCYC}	SCK0 to SCK4	Internal clock operation output pins are C_L = 80 pF + 1 TTL.	8 t_{CP}	—	ns	
SCK ↓ → SOT delay time	t_{SLOV}	SCK0 to SCK4, SOT0 to SOT4		–80	+80	ns	
Valid SIN → SCK ↑	t_{IVSH}	SCK0 to SCK4, SIN0 to SIN4		100	—	ns	
SCK ↑ → Valid SIN hold time	t_{SHIX}	SCK0 to SCK4, SIN0 to SIN4		60	—	ns	
Serial clock “H” pulse width	t_{SHSL}	SCK0 to SCK4	External clock operation output pins are C_L = 80 pF + 1 TTL.	4 t_{CP}	—	ns	
Serial clock “L” pulse width	t_{SLSH}	SCK0 to SCK4		4 t_{CP}	—	ns	
SCK ↓ → SOT delay time	t_{SLOV}	SCK0 to SCK4, SOT0 to SOT4		—	150	ns	
Valid SIN → SCK ↑	t_{IVSH}	SCK0 to SCK4, SIN0 to SIN4		60	—	ns	
SCK ↑ → Valid SIN hold time	t_{SHIX}	SCK0 to SCK4, SIN0 to SIN4		60	—	ns	

Notes : • AC characteristic in CLK synchronized mode.
• C_L is load capacity value of pins when testing.
• t_{CP} is the machine cycle (Unit : ns)

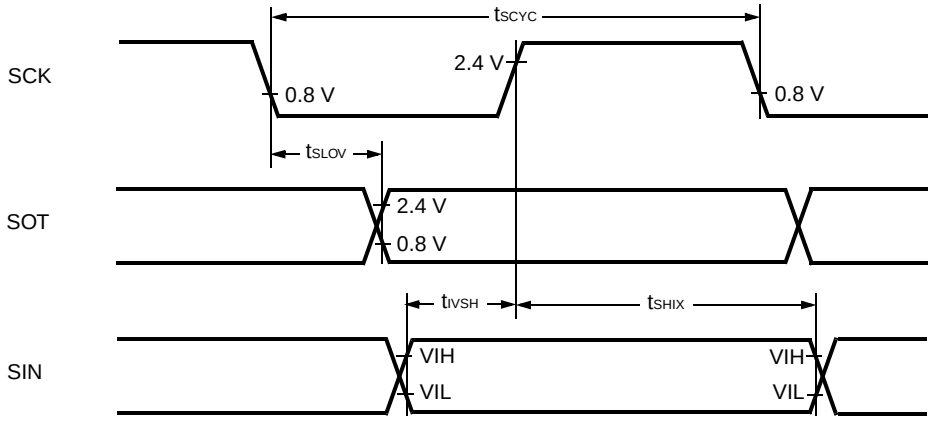

Internal Shift Clock Mode

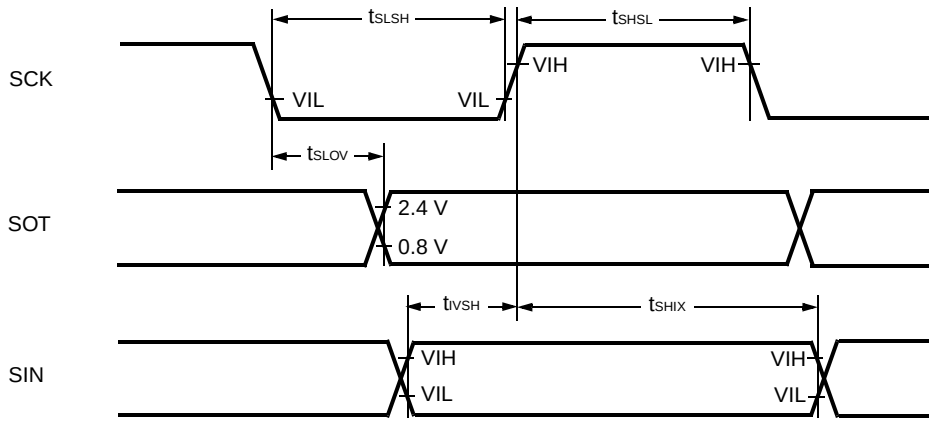


External Shift Clock Mode

(10) Trigger Input Timing

(T_A = –40 °C to +105 °C, V_{CC} = 5.0 V ± 10%, f_{CP} ≤ 24 MHz, V_{SS} = 0.0 V)


Parameter	Symbol	Pin	Condition	Value		Unit	Remarks
				Min	Max		
Input pulse width	t_{TRGH} t_{TRGL}	INT0 to INT15, INT0R to INT15R, ADTG	—	5 t_{CP}	—	ns	

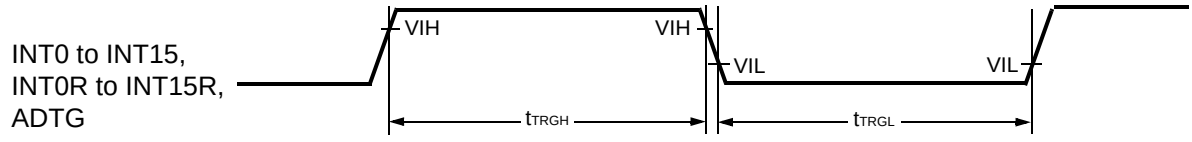

(11) Timer Related Resource Input Timing

(T_A = –40 °C to +105 °C, V_{CC} = 5.0 V ± 10%, f_{CP} ≤ 24 MHz, V_{SS} = 0 V)


Parameter	Symbol	Pin	Condition	Value		Unit	Remarks
				Min	Max		
Input pulse width	t_{TIWH} t_{TIWL}	TIN0 to TIN3, IN0 to IN7	—	4 t_{CP}	—	ns	

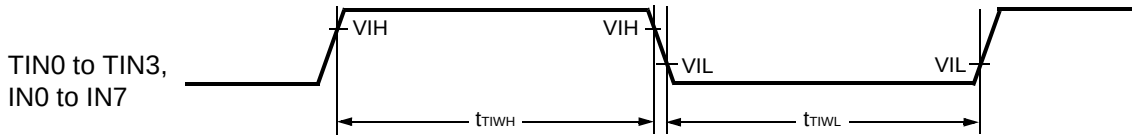

(12) Timer Related Resource Output Timing

(T_A = –40°C to +105°C, V_{CC} = 5.0 V ± 10%, f_{CP} ≤ 24 MHz, V_{SS} = 0.0 V)

Parameter	Symbol	Pin	Condition	Value		Unit	Remarks
				Min	Max		
CLK ↑ ⇒ T_{OUT} change time	t_{TO}	TOT0 to TOT3, PPG0 to PPGF	—	30	—	ns	

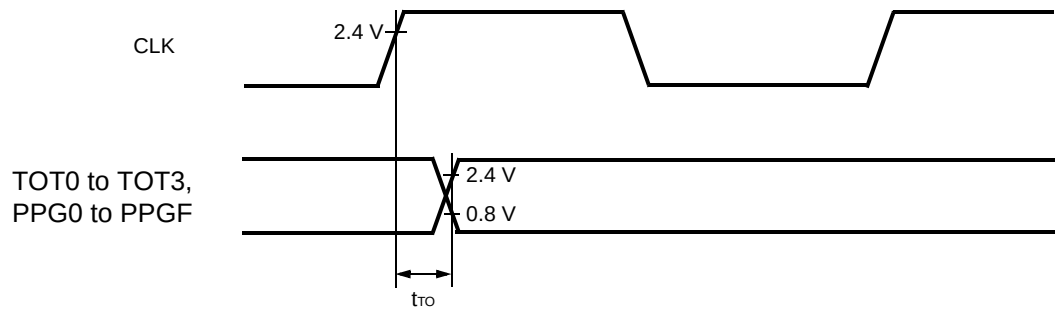

(13) I²C Timing

(T_A = –40°C to +105°C, V_{CC} = 5.0 V ± 10%, V_{SS} = 0.0 V)


Parameter	Symbol	Condition	Standard-mode		Fast-mode*4		Unit
			Min	Max	Min	Max	
SCL clock frequency	f_{SCL}	R = 1.7 kΩ, C = 50 pF*1	0	100	0	400	kHz
Hold time (repeated) START condition SDA↓→SCL↓	t_{HDSTA}		4.0	—	0.6	—	µs
"L" width of the SCL clock	t_{LOW}		4.7	—	1.3	—	µs
"H" width of the SCL clock	t_{HIGH}		4.0	—	0.6	—	µs
Set-up time for a repeated START condition SCL↑→SDA↓	t_{SUSTA}		4.7	—	0.6	—	µs
Data hold time SCL↓→SDA↓↑	t_{HDDAT}		0	3.45*2	0	0.9*3	µs
Data set-up time SDA↓↑→SCL↑	t_{SUDAT}		250	—	100	—	ns
Set-up time for STOP condition SCL↑→SDA↑	t_{SUSTO}		4.0	—	0.6	—	µs
Bus free time between a STOP and START condition	t_{BUS}		4.7	—	1.3	—	µs

*1 : R,C : Pull-up resistor and load capacitor of the SCL and SDA lines.

*2 : The maximum t_{HDDAT} have only to be met if the device does not stretch the "L" width (t_{LOW}) of the SCL signal.

*3 : A Fast-mode I²C-bus device can be used in a Standard-mode I²C-bus system, but the requirement $t_{SUDAT} \geq 250$ ns must then be met.

*4 : For use at over 100 kHz, set the machine clock to at least 6 MHz.

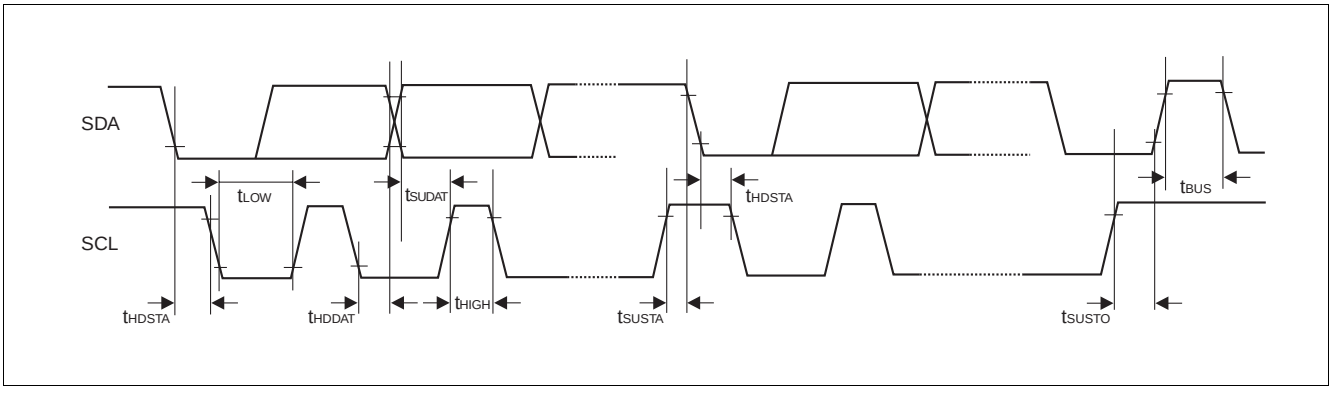

5. A/D Converter

(T_A = –40 °C to +105 °C, 3.0 V ≤ AVRH – AVRL, V_{CC} = AV_{CC} = 5.0 V ± 10%, f_{CP} ≤ 24 MHz, V_{SS} = AV_{SS} = 0 V)

Parameter	Symbol	Pin	Value			Unit	Remarks
			Min	Typ	Max		
Resolution	—	—	—	—	10	bit	
Total error	—	—	—	—	±3.0	LSB	
Nonlinearity error	—	—	—	—	±2.5	LSB	
Differential nonlinearity error	—	—	—	—	±1.9	LSB	
Zero reading voltage	V_{OT}	AN0 to AN23	AVRL – 1.5	AVRL + 0.5	AVRL + 2.5	LSB	
Full scale reading voltage	V_{FST}	AN0 to AN23	AVRH – 3.5	AVRH – 1.5	AVRH + 0.5	LSB	
Compare time	—	—	1.0	—	16,500	µs	4.5 V ≤ AV_{CC} ≤ 5.5 V
			2.0				4.0 V ≤ AV_{CC} < 4.5 V
Sampling time	—	—	0.5	—	∞	µs	4.5 V ≤ AV_{CC} ≤ 5.5 V
			1.2				4.0 V ≤ AV_{CC} < 4.5 V
Analog port input current	I_{AIN}	AN0 to AN23	–0.3	—	+0.3	µA	
Analog input voltage range	V_{AIN}	AN0 to AN23	AVRL	—	AVRH	V	
Reference voltage range	—	AVRH	AVRL + 2.7	—	AV_{CC}	V	
	—	AVRL	0	—	AVRH – 2.7	V	
Power supply current	I_A	AV_{CC}	—	3.5	7.5	mA	
	I_{AH}	AV_{CC}	—	—	5	µA	*
Reference voltage current	I_R	AVRH	—	600	900	µA	
	I_{RH}	AVRH	—	—	5	µA	*
Offset between input channels	—	AN0 to AN23	—	—	4	LSB	


* : IF A/D convertor is not operating, a current when CPU is stopped is applicable (V_{CC} = AV_{CC} = AVRH = 5.0 V) .

Note : The accuracy gets worse as AVRH – AVRL becomes smaller.

6. Definition of A/D Converter Terms

Resolution	:	Analog variation that is recognized by an A/D converter.
Non linearity error	:	Deviation between a line across zero-transition line (“00 0000 0000” ← → “00 0000 0001”) and full-scale transition line (“11 1111 1110” ← → “11 1111 1111”) and actual conversion characteristics.
Differential linearity error	:	Deviation of input voltage, which is required for changing output code by 1 LSB, from an ideal value.
Total error	:	Difference between an actual value and an ideal value. A total error includes zero transition error, full-scale transition error, and linear error.
Zero reading voltage	:	Input voltage which results in the minimum conversion value.
Full scale reading voltage	:	Input voltage which results in the maximum conversion value.

Total error

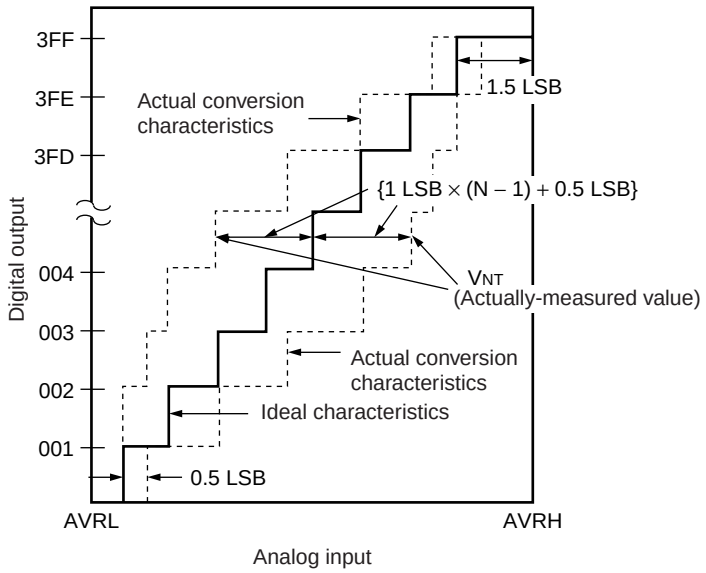

$$\text{Total error of digital output “N”} = \frac{V_{NT} - \{1\ \text{LSB} \times (N - 1) + 0.5\ \text{LSB}\}}{1\ \text{LSB}}\ [\text{LSB}]$$

$$1\ \text{LSB} = (\text{Ideal value})\ \frac{\text{AVRH} - \text{AVRL}}{1024}\ [\text{V}]$$


V_{OT} (Ideal value) = AVRL + 0.5 LSB [V]

V_{FST} (Ideal value) = AVRH – 1.5 LSB [V]

V_{NT} : A voltage at which digital output transitions from (N – 1) to N.

(Continued)

(Continued)

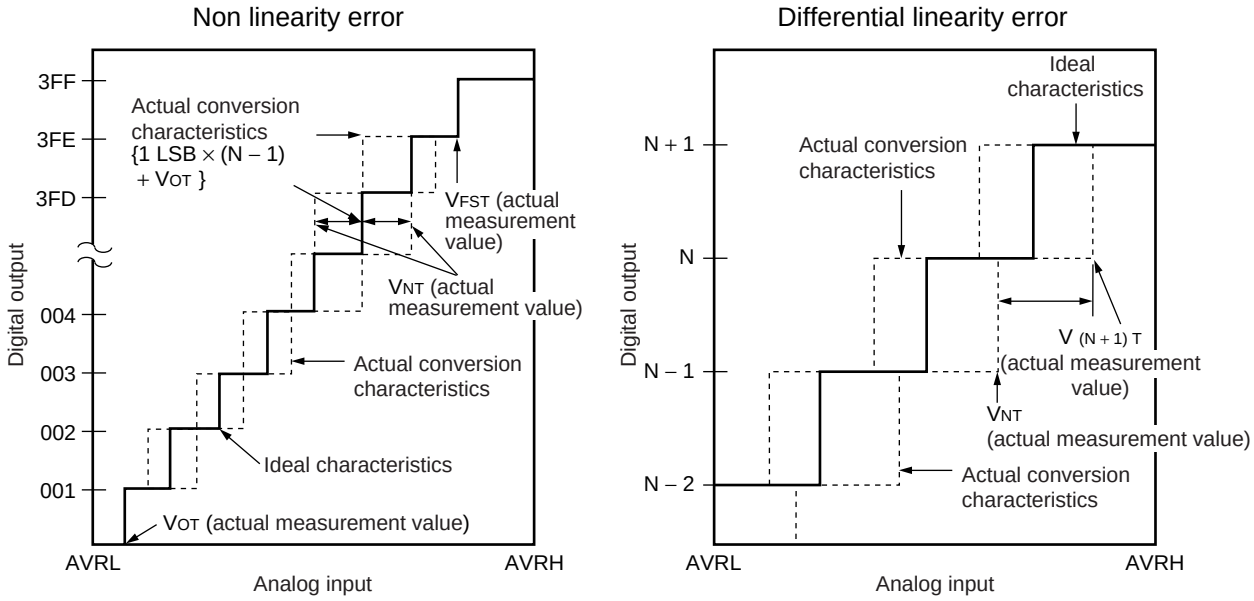

$$\text{Non linearity error of digital output N} = \frac{V_{NT} - \{1\ \text{LSB} \times (N - 1) + V_{OT}\}}{1\ \text{LSB}}\ [\text{LSB}]$$

$$\text{Differential linearity error of digital output N} = \frac{V_{(N+1)T} - V_{NT}}{1\ \text{LSB}} - 1\ \text{LSB}\ [\text{LSB}]$$

$$1\ \text{LSB} = \frac{V_{FST} - V_{OT}}{1022}\ [\text{V}]$$

V_{OT} : Voltage at which digital output transits from “000_H” to “001_H.”
V_{FST} : Voltage at which digital output transits from “$3FE_H$” to “$3FF_H$.”

7. Notes on A/D Converter Section


Use the device with external circuits of the following output impedance for analog inputs :

Recommended output impedance of external circuits are : Approx. 1.5 kΩ or lower (4.0 V ≤ AV_{CC} ≤ 5.5 V, sampling period ≤ 0.5 µs)

If an external capacitor is used, in consideration of the effect by tap capacitance caused by external capacitors and on-chip capacitors, capacitance of the external one is recommended to be several thousand times as high as internal capacitor.

If output impedance of an external circuit is too high, a sampling period for an analog voltage may be insufficient.

- Analog input circuit model

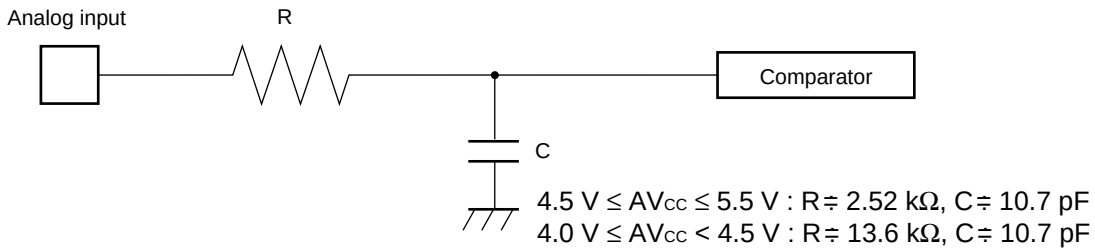

Note : Use the values in the figure only as a guideline.

8. Flash Memory Program/Erase Characteristics

Parameter	Conditions	Value			Unit	Remarks
		Min	Typ	Max		
Sector erase time	T_A = +25 °C V_{CC} = 5.0 V	—	1	15	s	Excludes programming prior to erasure
Chip erase time		—	9	—	s	Excludes programming prior to erasure
Word (16 bit width) programming time		—	16	3,600	µs	Except for the over head time of the system
Programs/Erase cycle	—	10,000	—	—	cycle	
Flash Data Retension Time	Average T_A = +85 °C	20	—	—	Year	*


* : This value comes from the technology qualification (using Arrhenius equation to translate high temperature measurements into normalized value at +85 °C) .

■ EXAMPLE CHARACTERISTICS

- MB90F346A, MB90F346AS, MB90F346CA, MB90F346CAS


I_{CC} – V_{CC}

T_A = +25 °C, at external clock operating
f = Internal operation frequency

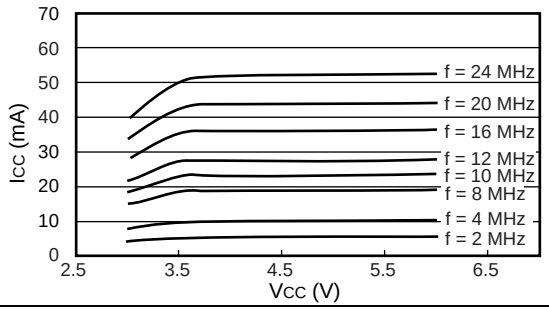


I_{CCL} – V_{CC}

T_A = +25 °C, at external clock operating
f = Internal operation frequency

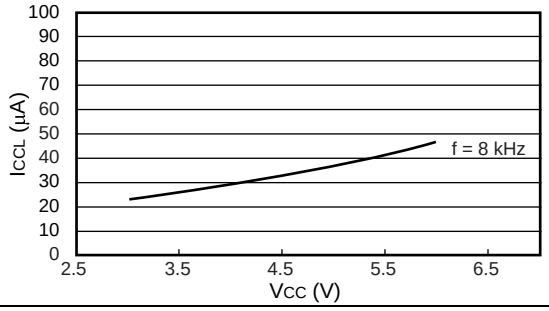


I_{CCS} – V_{CC}

T_A = +25 °C, at external clock operating
f = Internal operation frequency

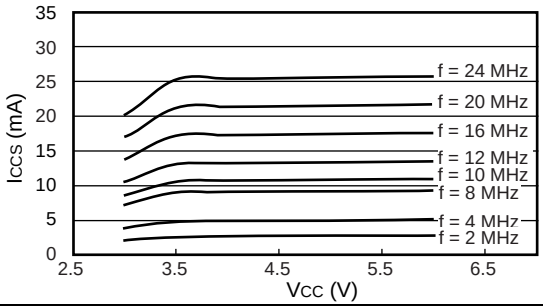


I_{CCLS} – V_{CC}

T_A = +25 °C, at external clock operating
f = Internal operation frequency

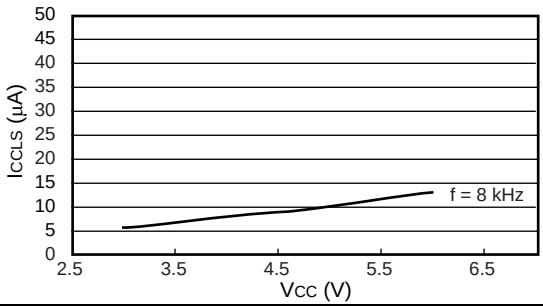


I_{CTS} – V_{CC}

T_A = +25 °C, at external clock operating
f = Internal operation frequency

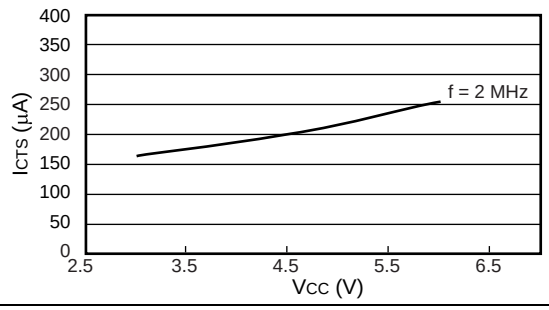


I_{CCT} – V_{CC}

T_A = +25 °C, at external clock operating
f = Internal operation frequency

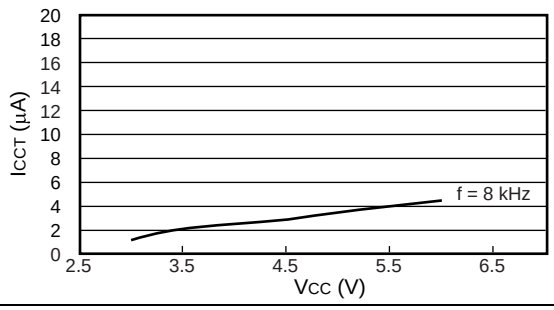


$I_{CTSPLL6}$ – V_{CC}

T_A = +25 °C, at external clock operating
f = Internal operation frequency

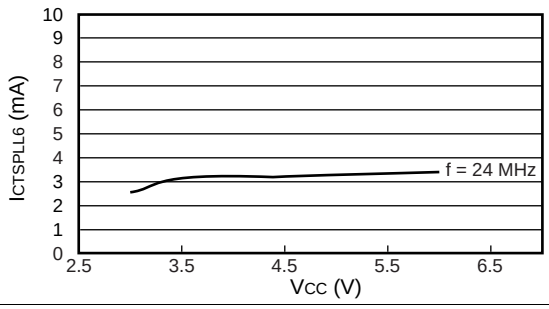

I_{CCH} – V_{CC}


T_A = +25 °C, at stop

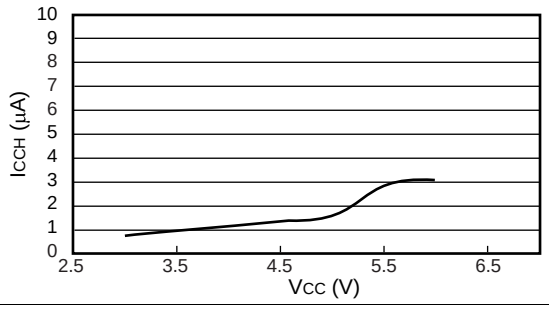

- MB90F347A, MB90F347AS, MB90F347CA, MB90F347CAS


I_{CC} – V_{CC}

T_A = +25 °C, at external clock operating
f = Internal operation frequency

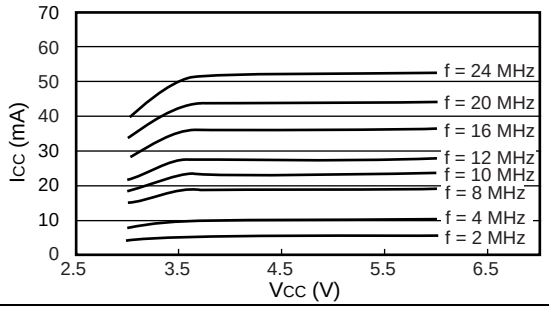


I_{CCL} – V_{CC}

T_A = +25 °C, at external clock operating
f = Internal operation frequency

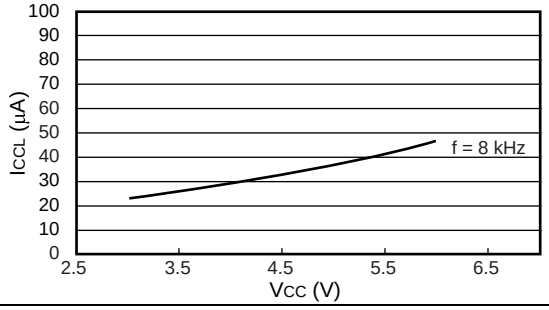


I_{CCS} – V_{CC}

T_A = +25 °C, at external clock operating
f = Internal operation frequency

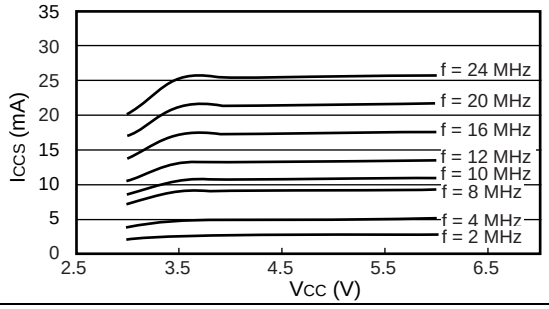


I_{CCLS} – V_{CC}

T_A = +25 °C, at external clock operating
f = Internal operation frequency

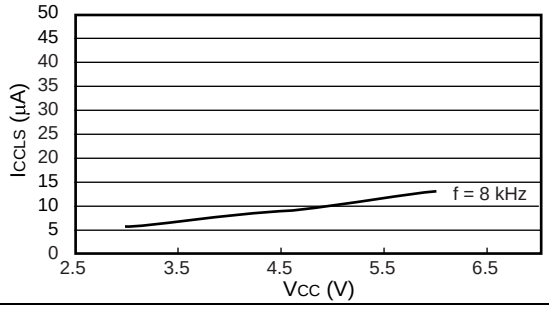


I_{CTS} – V_{CC}

T_A = +25 °C, at external clock operating
f = Internal operation frequency

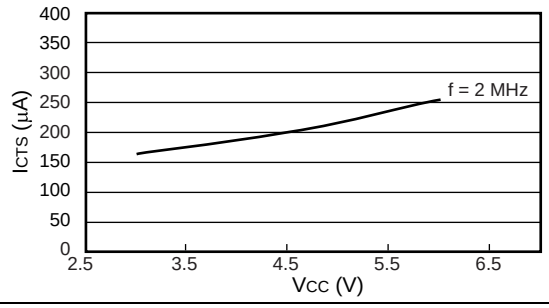


I_{CCT} – V_{CC}

T_A = +25 °C, at external clock operating
f = Internal operation frequency

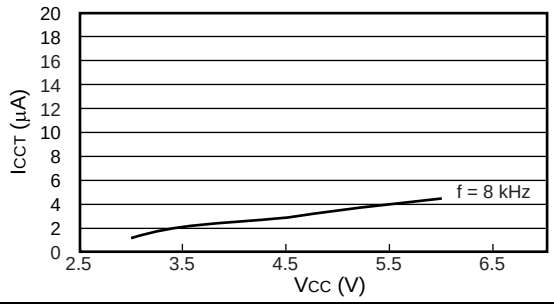


$I_{CTSPLL6}$ – V_{CC}

T_A = +25 °C, at external clock operating
f = Internal operation frequency

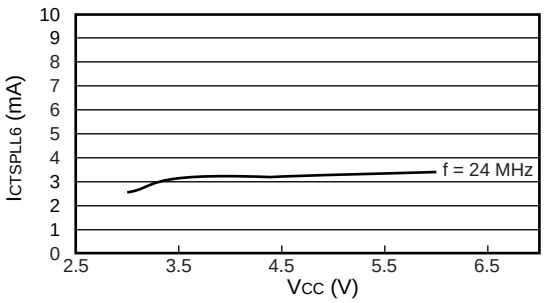

I_{CCH} – V_{CC}


T_A = +25 °C, at stop

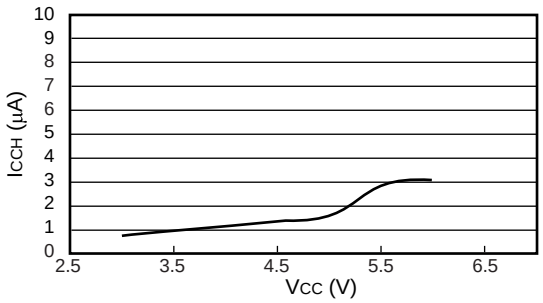

- MB90F349A, MB90F349AS, MB90F349CA, MB90F349CAS


$I_{CC} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

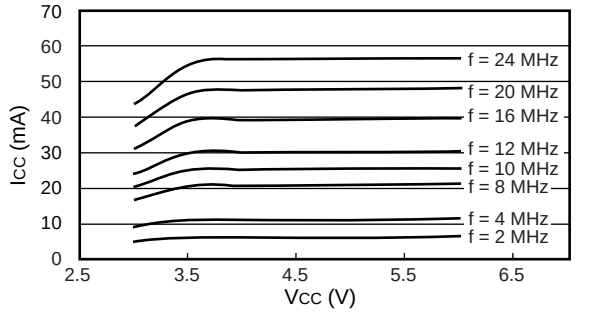


$I_{CCL} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

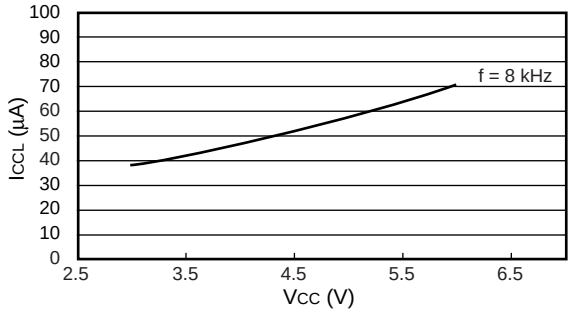


$I_{CCS} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

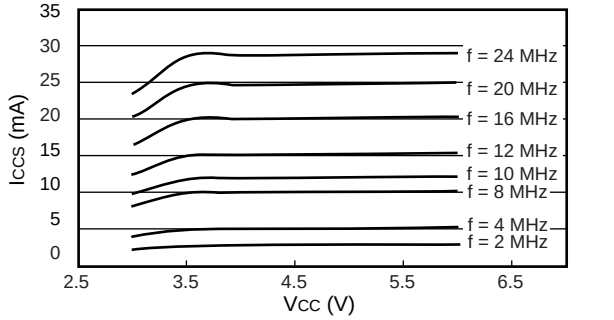


$I_{CCLS} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

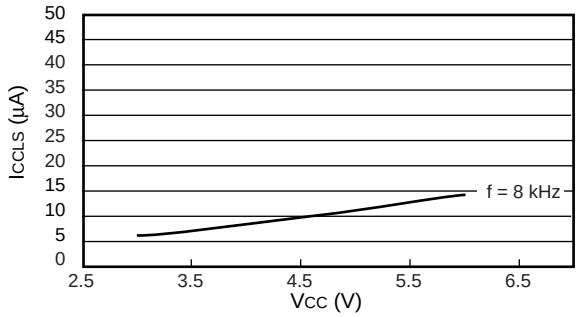


$I_{CTS} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

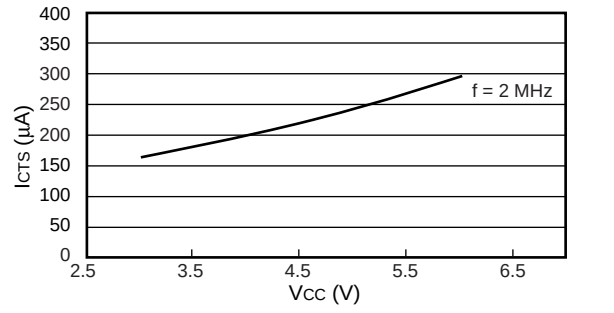


$I_{CCT} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

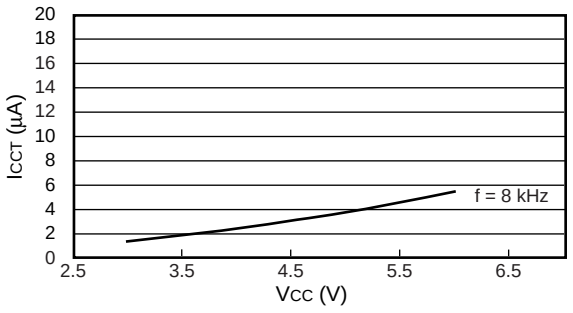


$I_{CTSPLL6} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

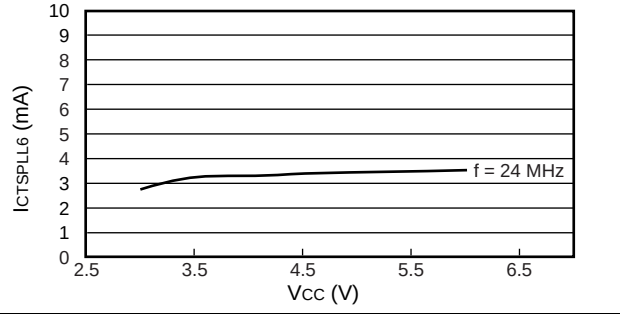

$I_{CCH} - V_{CC}$


T_A = +25 °C, at stop

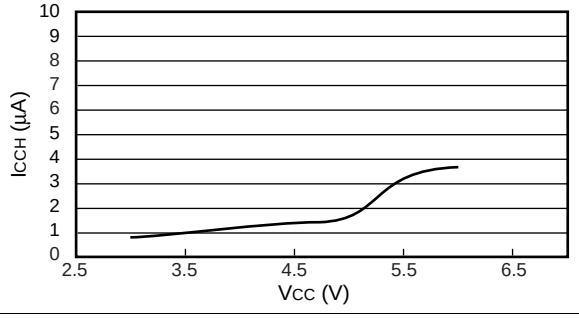

- MB90F342A, MB90F342AS, MB90F342CA, MB90F342CAS


$I_{CC} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

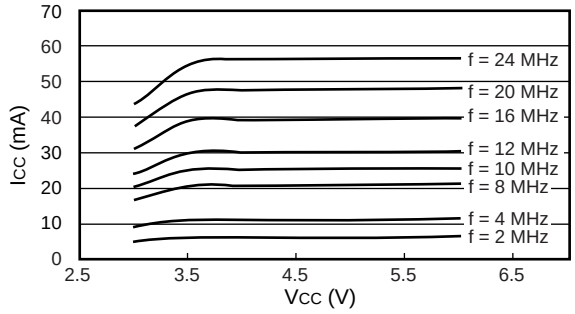


$I_{CCL} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

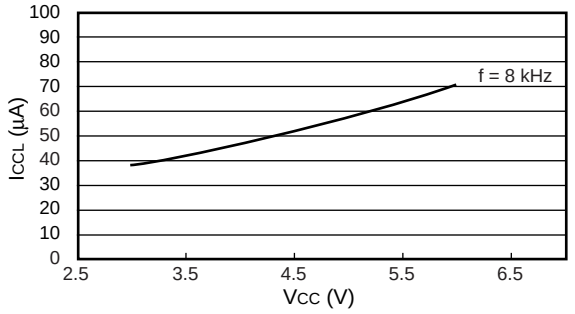


$I_{CCS} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

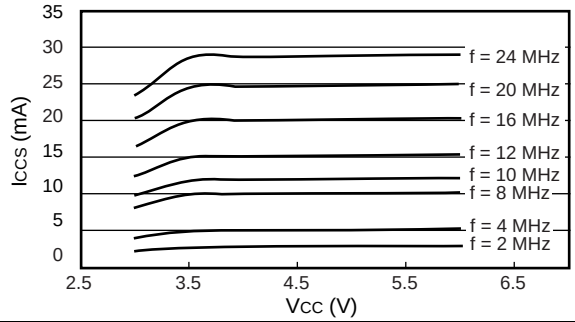


$I_{CCLS} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

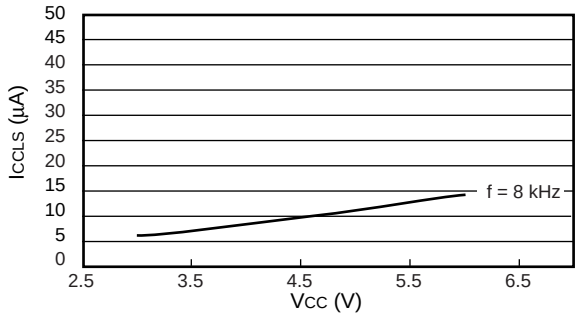


$I_{CTS} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

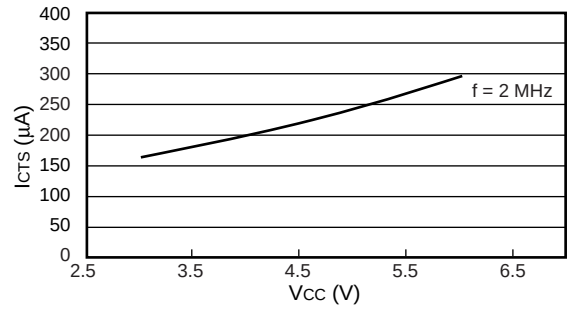


$I_{CCT} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

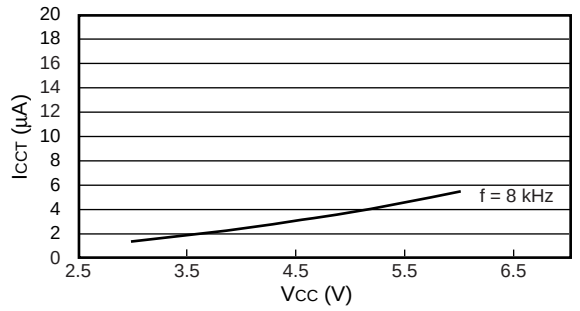


$I_{CTSPLL6} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

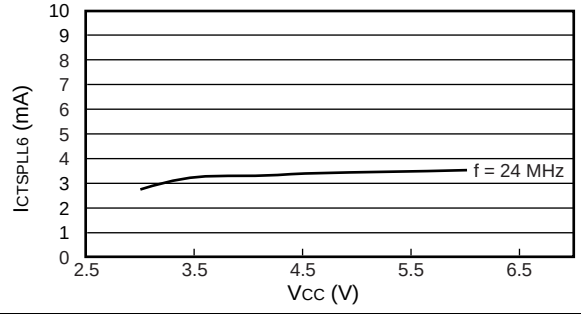

$I_{CCH} - V_{CC}$


T_A = +25 °C, at stop

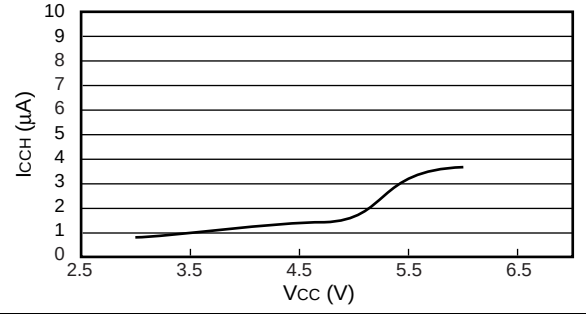

- MB90F345A, MB90F345AS, MB90F345CA, MB90F345CAS


$I_{CC} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

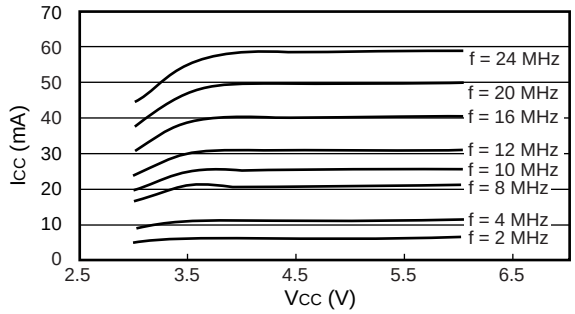


$I_{CCL} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

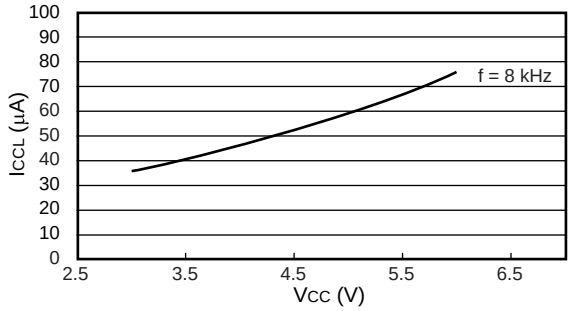


$I_{CCS} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

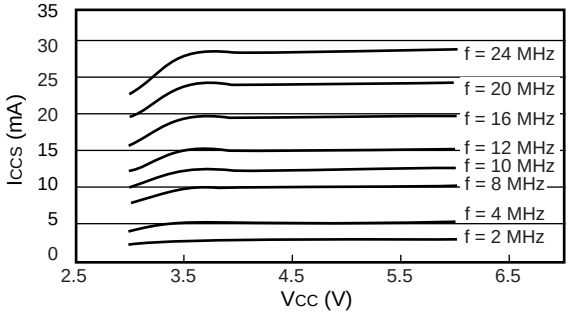


$I_{CCLS} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

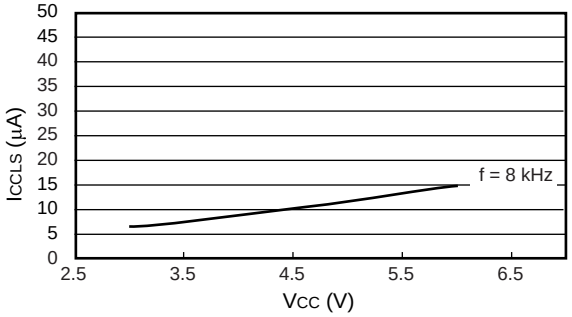


$I_{CTS} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

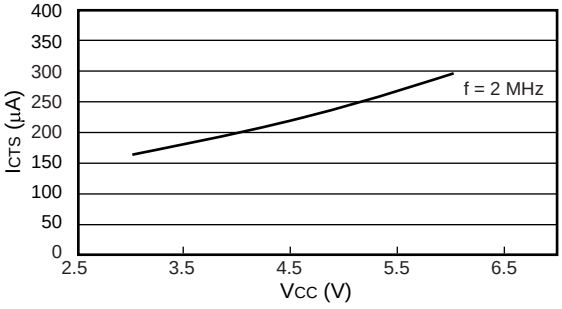


$I_{CCT} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

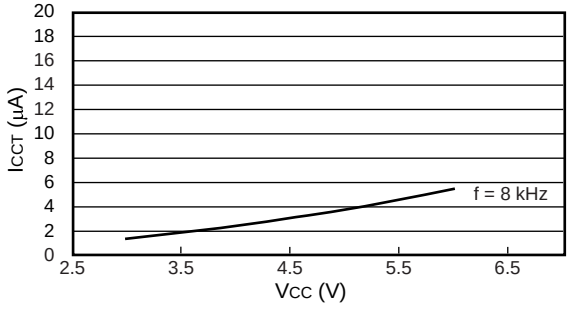


$I_{CTSPLL6} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

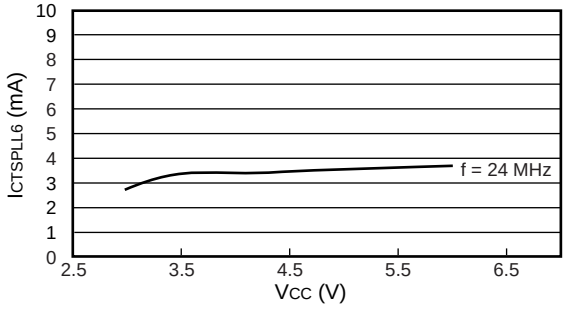

$I_{CCH} - V_{CC}$


T_A = +25 °C, at stop

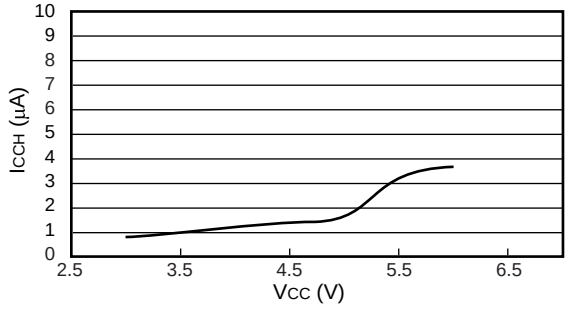

- MB90346A, MB90346AS, MB90346CA, MB90346CAS


$I_{CC} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

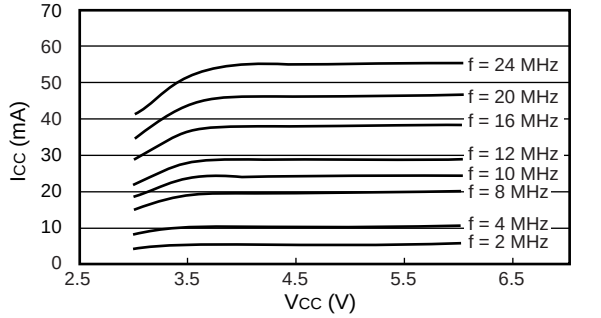


$I_{CCL} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

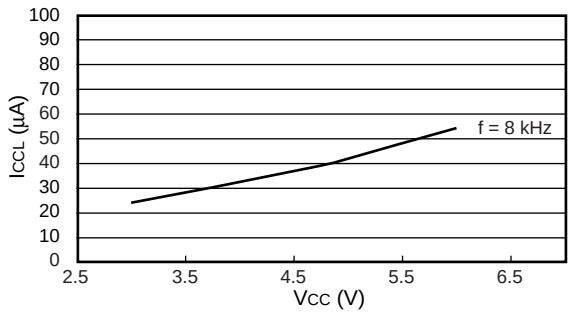


$I_{CCS} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

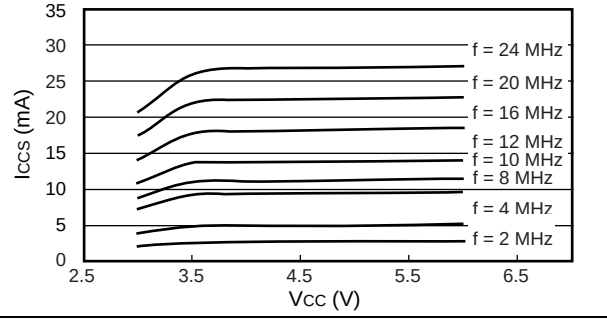


$I_{CCLS} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

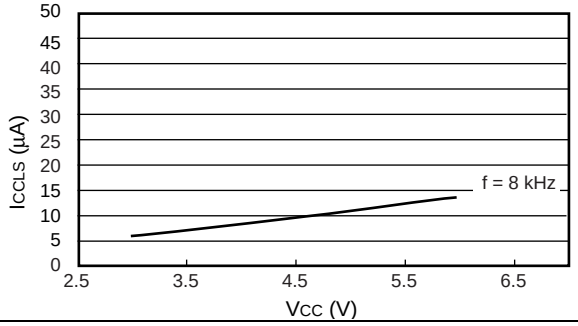


$I_{CTS} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

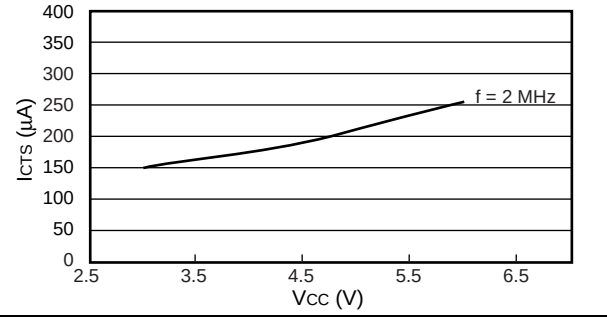


$I_{CCT} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

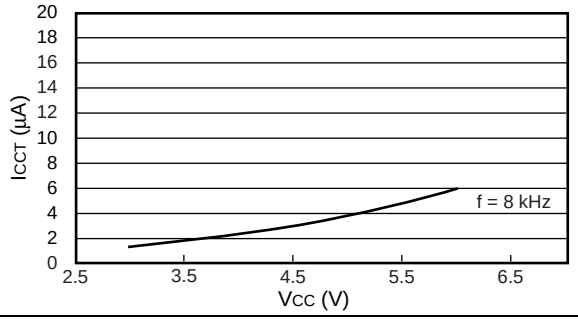


$I_{CTSPLL6} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

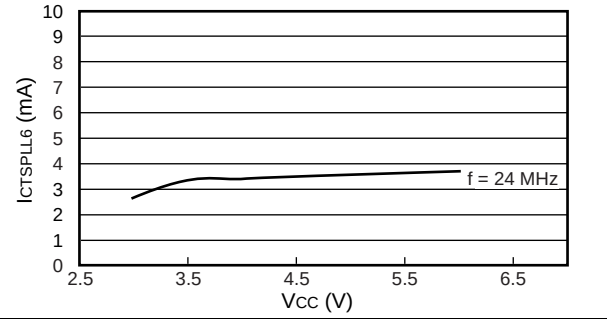

$I_{CCH} - V_{CC}$


T_A = +25 °C, at stop

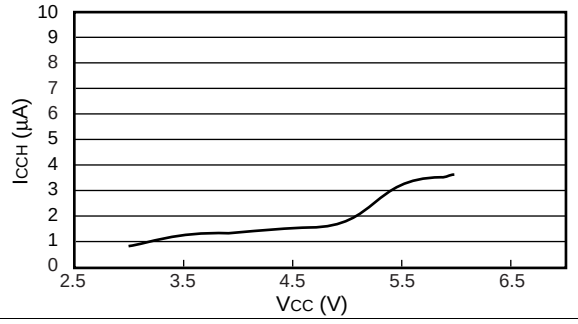

- MB90347A, MB90347AS, MB90347CA, MB90347CAS


$I_{CC} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

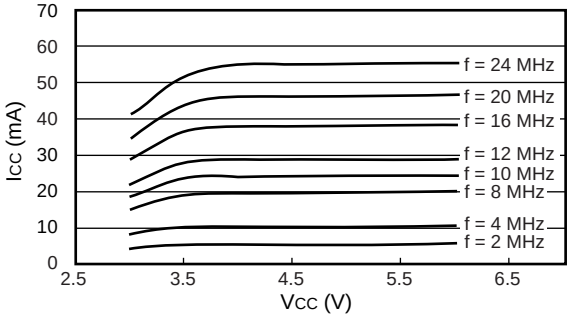


$I_{CCL} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

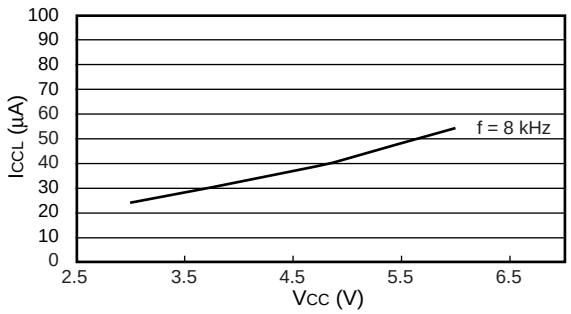


$I_{CCS} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

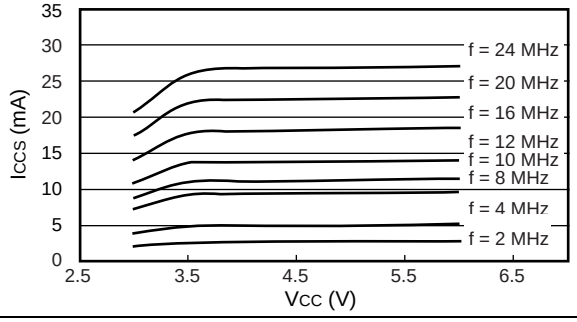


$I_{CCLS} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

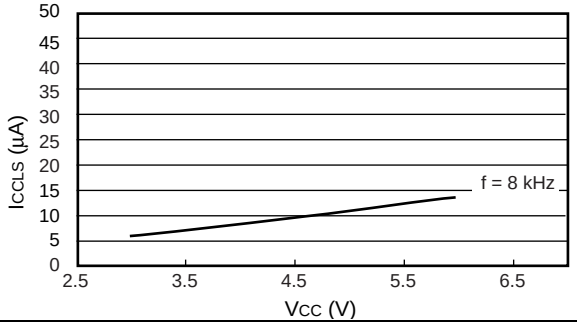


$I_{CTS} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

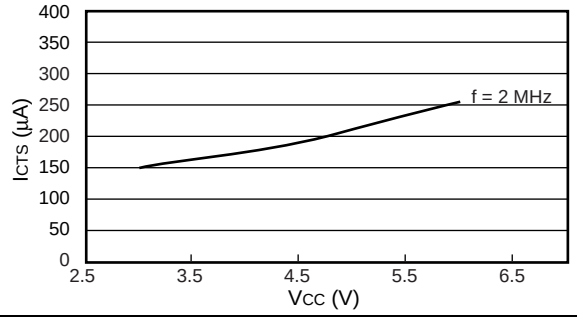


$I_{CCT} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

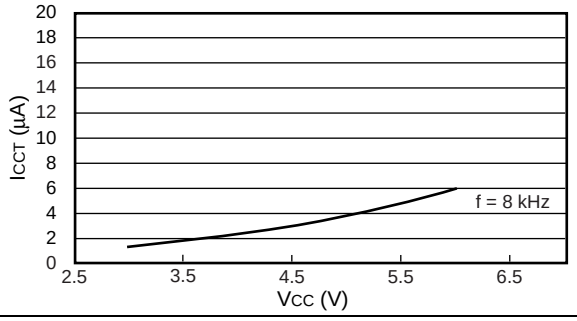


$I_{CTSPLL6} - V_{CC}$

T_A = +25 °C, at external clock operating
f = Internal operation frequency

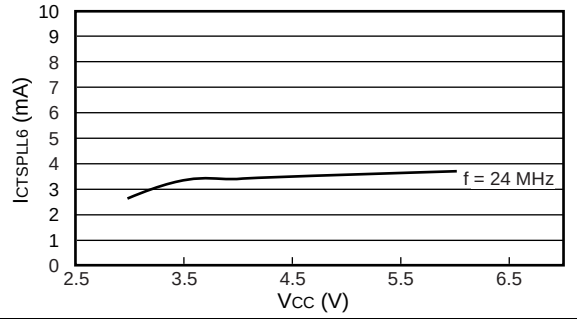

$I_{CCH} - V_{CC}$


T_A = +25 °C, at stop

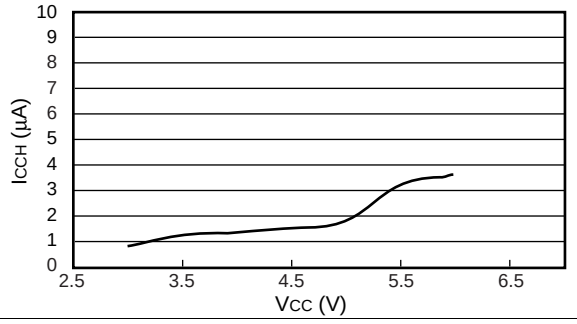

- I/O characteristics


$(V_{CC}–V_{OH})$ – I_{OH}

T_A = +25 °C, V_{CC} = 4.5 V

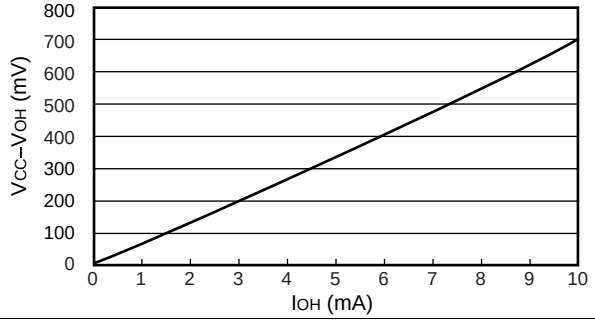


V_{OL} – I_{OL}

T_A = +25 °C, V_{CC} = 4.5 V

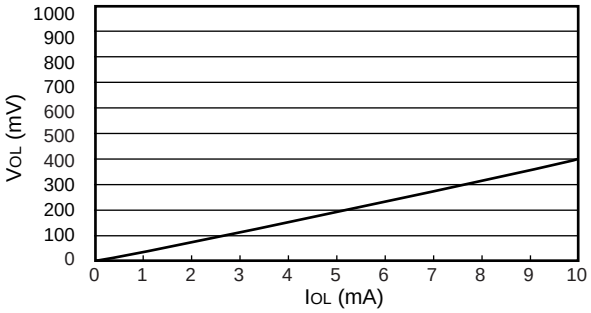

Automotive V_{IN} – V_{CC}


T_A = +25 °C

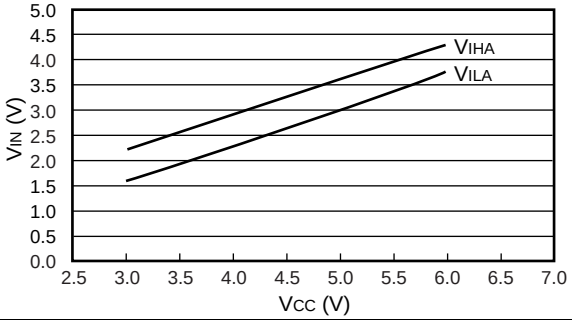

CMOS V_{IN} – V_{CC}


UART-SIN pin, other than I²C pin

T_A = +25 °C

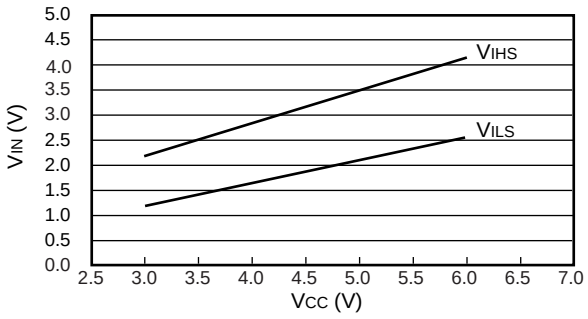

TTL V_{IN} – V_{CC}


T_A = +25 °C

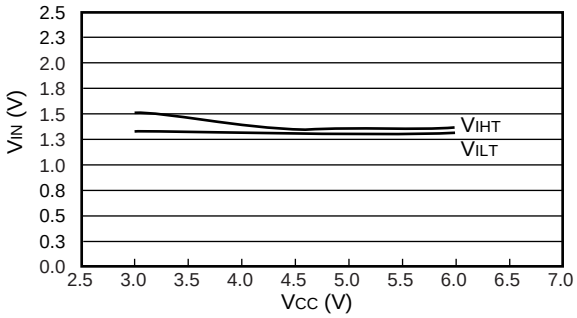

CMOS V_{IN} – V_{CC}

UART-SIN pin, I²C pin

T_A = +25 °C

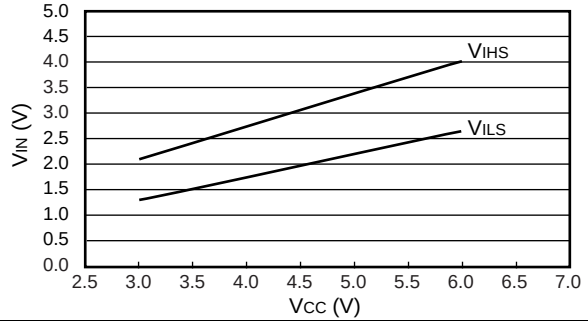

■ ORDERING INFORMATION

Part number	Package	Remarks
MB90F342APF	100-pin Plastic QFP (FPT-100P-M06)	
MB90F342ASPF		
MB90F342CAPF		
MB90F342CASPF		
MB90F342APFV	100-pin Plastic LQFP (FPT-100P-M05)	
MB90F342ASPFV		
MB90F342CAPFV		
MB90F342CASPFV		
MB90F343APF	100-pin Plastic QFP (FPT-100P-M06)	
MB90F343ASPF		
MB90F343CAPF		
MB90F343CASPF		
MB90F343APFV	100-pin Plastic LQFP (FPT-100P-M05)	
MB90F343ASPFV		
MB90F343CAPFV		
MB90F343CASPFV		
MB90F345APF	100-pin Plastic QFP (FPT-100P-M06)	
MB90F345ASPF		
MB90F345CAPF		
MB90F345CASPF		
MB90F345APFV	100-pin Plastic LQFP (FPT-100P-M05)	
MB90F345ASPFV		
MB90F345CAPFV		
MB90F345CASPFV		
MB90F346APF	100-pin Plastic QFP (FPT-100P-M06)	
MB90F346ASPF		
MB90F346CAPF		
MB90F346CASPF		
MB90F346APFV	100-pin Plastic LQFP (FPT-100P-M05)	
MB90F346ASPFV		
MB90F346CAPFV		
MB90F346CASPFV		

(Continued)

Part number	Package	Remarks
MB90F347APF	100-pin Plastic QFP (FPT-100P-M06)	
MB90F347ASPF		
MB90F347CAPF		
MB90F347CASPF		
MB90F347APFV	100-pin Plastic LQFP (FPT-100P-M05)	
MB90F347ASPFV		
MB90F347CAPFV		
MB90F347CASPFV		
MB90F349APF	100-pin Plastic QFP (FPT-100P-M06)	
MB90F349ASPF		
MB90F349CAPF		
MB90F349CASPF		
MB90F349APFV	100-pin Plastic LQFP (FPT-100P-M05)	
MB90F349ASPFV		
MB90F349CAPFV		
MB90F349CASPFV		
MB90341APF	100-pin Plastic QFP (FPT-100P-M06)	
MB90341ASPF		
MB90341CAPF		
MB90341CASPF		
MB90341APFV	100-pin Plastic LQFP (FPT-100P-M05)	
MB90341ASPFV		
MB90341CAPFV		
MB90341CASPFV		
MB90342APF	100-pin Plastic QFP (FPT-100P-M06)	
MB90342ASPF		
MB90342CAPF		
MB90342CASPF		
MB90342APFV	100-pin Plastic LQFP (FPT-100P-M05)	
MB90342ASPFV		
MB90342CAPFV		
MB90342CASPFV		

(Continued)


(Continued)

Part number	Package	Remarks
MB90346APF	100-pin Plastic QFP (FPT-100P-M06)	
MB90346ASPF		
MB90346CAPF		
MB90346CASPF		
MB90346APFV	100-pin Plastic LQFP (FPT-100P-M05)	
MB90346ASPFV		
MB90346CAPFV		
MB90346CASPFV		
MB90347APF	100-pin Plastic QFP (FPT-100P-M06)	
MB90347ASPF		
MB90347CAPF		
MB90347CASPF		
MB90347APFV	100-pin Plastic LQFP (FPT-100P-M05)	
MB90347ASPFV		
MB90347CAPFV		
MB90347CASPFV		
MB90348APF	100-pin Plastic QFP (FPT-100P-M06)	
MB90348ASPF		
MB90348CAPF		
MB90348CASPF		
MB90348APFV	100-pin Plastic LQFP (FPT-100P-M05)	
MB90348ASPFV		
MB90348CAPFV		
MB90348CASPFV		
MB90349APF	100-pin Plastic QFP (FPT-100P-M06)	
MB90349ASPF		
MB90349CAPF		
MB90349CASPF		
MB90349APFV	100-pin Plastic LQFP (FPT-100P-M05)	
MB90349ASPFV		
MB90349CAPFV		
MB90349CASPFV		
MB90V340A-101	299-pin Ceramic PGA (PGA-299C-A01)	For evaluation
MB90V340A-102		

■ PACKAGE DIMENSIONS

100-pin Plastic QFP
(FPT-100P-M06)

Note 1) * : These dimensions do not include resin protrusion.
Note 2) Pins width and pins thickness including plating thickness.
Note 3) Pins width do not include tie bar cutting remainder.

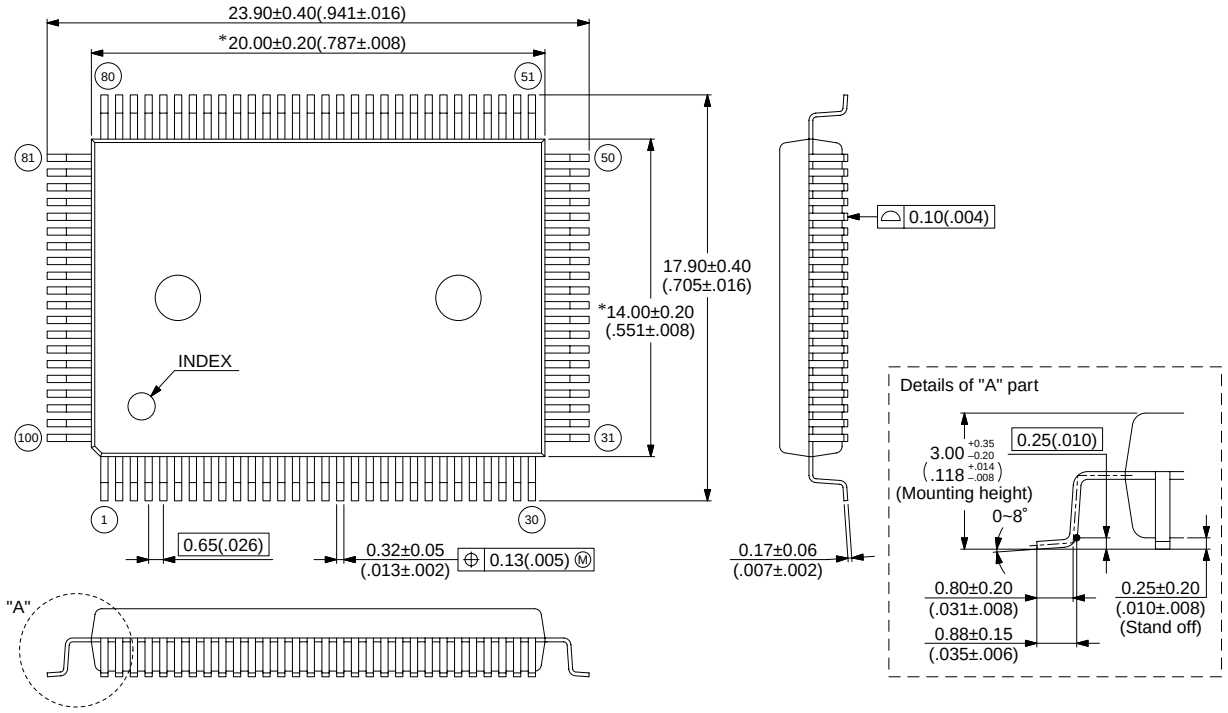

© 2002 FUJITSU LIMITED F100008S-c-5-5


Dimensions in mm (inches)
Note : The values in parentheses are reference values.

(Continued)

(Continued)

100-pin Plastic LQFP
(FPT-100P-M05)

Note 1) * : These dimensions do not include resin protrusion.
Note 2) Pins width and pins thickness include plating thickness.
Note 3) Pins width do not include tie bar cutting remainder.

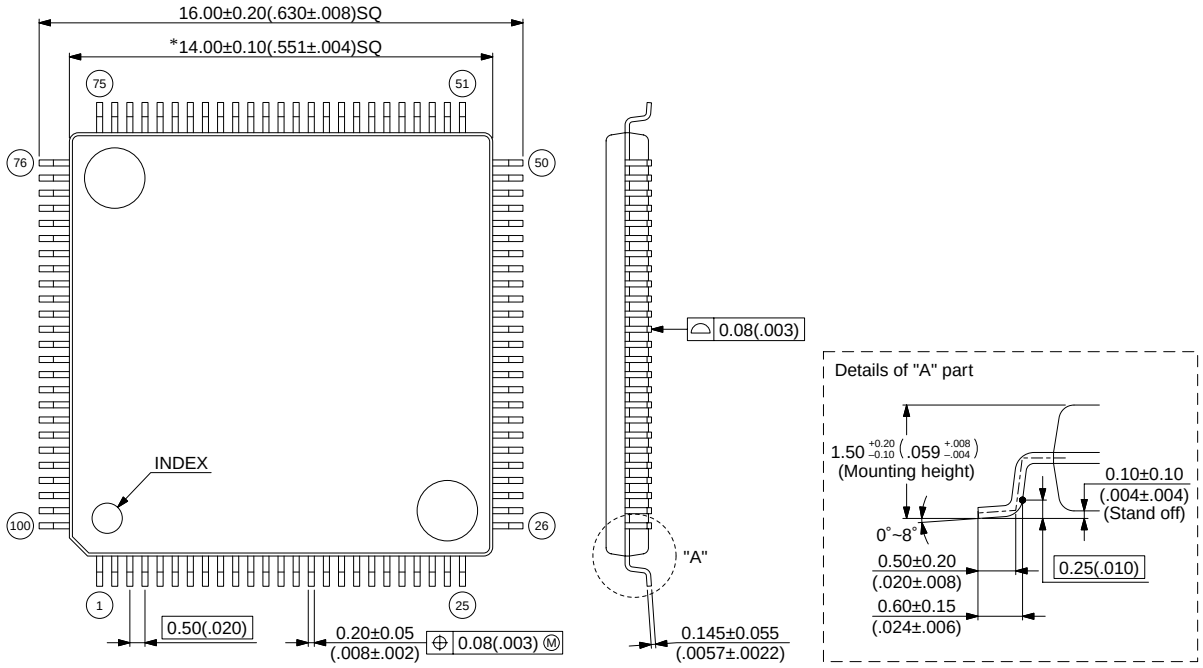

© 2003 FUJITSU LIMITED F100007S-c-4-6

Dimensions in mm (inches)
Note : The values in parentheses are reference values.

FUJITSU LIMITED

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU sales representatives before ordering.

The information, such as descriptions of function and application circuit examples, in this document are presented solely for the purpose of reference to show examples of operations and uses of Fujitsu semiconductor device; Fujitsu does not warrant proper operation of the device with respect to use based on such information. When you develop equipment incorporating the device based on such information, you must assume any responsibility arising out of such use of the information. Fujitsu assumes no liability for any damages whatsoever arising out of the use of the information.

Any information in this document, including descriptions of function and schematic diagrams, shall not be construed as license of the use or exercise of any intellectual property right, such as patent right or copyright, or any other right of Fujitsu or any third party or does Fujitsu warrant non-infringement of any third-party's intellectual property right or other right by using such information. Fujitsu assumes no liability for any infringement of the intellectual property rights or other rights of third parties which would result from the use of information contained herein.

The products described in this document are designed, developed and manufactured as contemplated for general use, including without limitation, ordinary industrial use, general office use, personal use, and household use, but are not designed, developed and manufactured as contemplated (1) for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could have a serious effect to the public, and could lead directly to death, personal injury, severe physical damage or other loss (i.e., nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system), or (2) for use requiring extremely high reliability (i.e., submersible repeater and artificial satellite).

Please note that Fujitsu will not be liable against you and/or any third party for any claims or damages arising in connection with above-mentioned uses of the products.

Any semiconductor devices have an inherent chance of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Law of Japan, the prior authorization by Japanese government will be required for export of those products from Japan.

F0405
© FUJITSU LIMITED Printed in Japan