


Product Summary

- V_{DS} 60V
- I_D 100A
- $R_{DS(ON)}$ (at $V_{GS}=10V$) $<6.8m\Omega$
- 100% EAS Tested
- 100% ∇V_{DS} Tested

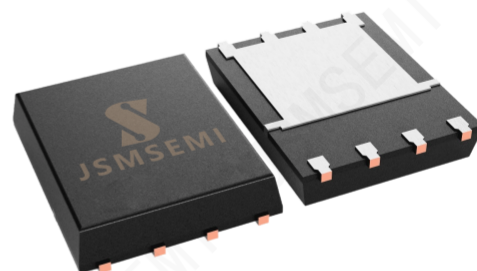


General Description

- Trench Power MOSFET technology
- Excellent package for heat dissipation
- High density cell design for low $R_{DS(ON)}$
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Halogen Free

Applications

- Power switching application
- Uninterruptible power supply
- DC-DC convertor
- Motor drivers



■ Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter		Symbol	Limit	Unit
Drain-source Voltage		V_{DS}	60	V
Gate-source Voltage		V_{GS}	± 20	V
Drain Current	$T_C=25^\circ\text{C}$	I_D	100	A
	$T_C=100^\circ\text{C}$		60	
Pulsed Drain Current ^A		I_{DM}	400	A
Avalanche energy ^B		EAS	221	mJ
Total Power Dissipation ^C	$T_C=25^\circ\text{C}$	P_D	78	W
	$T_C=100^\circ\text{C}$		51	
Junction and Storage Temperature Range		T_J, T_{STG}	$-55 \sim +150$	$^\circ\text{C}$

■ Thermal resistance

Parameter		Symbol	Typ	Max	Units
Thermal Resistance Junction-to-Ambient ^D	Steady-State	$R_{\theta JA}$	55		$^\circ\text{C/W}$
Thermal Resistance Junction-to-Case	Steady-State	$R_{\theta JC}$	1.6		


Ordering Information

Order number	Package	Marking	Operation Temperature Range	MSL Grade	Ship, Quantity	Green
CSD18563Q5A-JSM	DFN5060-8L	CSD18563	-55 to 150°C	1	T&R, 5000	RoHS


■ Electrical Characteristics ($T_J=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Static Characteristic						
Drain-source breakdown voltage	BV_{DSS}	60	-	-	V	$V_{GS}=0V, I_D=250\mu A$
Gate threshold voltage	$V_{GS(th)}$	1.2	-	2.5	V	$V_{DS}=V_{GS}, I_D=250\mu A$
Zero gate voltage drain current	I_{DSS}	-	0.02	1	μA	$V_{DS}=60V, V_{GS}=0V$ $T_J=25^{\circ}C$ $T_J=150^{\circ}C$
Gate-source leakage current	I_{GSS}	-	± 10	± 100	nA	$V_{GS}=\pm 20V, V_{DS}=0V$
Drain-source on-state resistance	$R_{DS(on)}$	-	5.7	6.8	m Ω	$V_{gs}=10V, I_d=20A$
		-	4.8	6.5	m Ω	$V_{gs}=4.5V, I_d=20A$
Dynamic Characteristic						
Input Capacitance	C_{iss}	-	2240	-	pF	$V_{GS}=0V,$ $V_{DS}=25V,$ $f=300KHz$
Output Capacitance	C_{oss}	-	850	-		
Reverse Transfer Capacitance	C_{rss}	-	20	-		
Gate Total Charge	Q_G	-	33	-	nC	$V_{ds}=30V, I_d=20A, V_{gs}=10V$
Gate-Source charge	Q_{gs}	-	4.5	-		
Gate-Drain charge	Q_{gd}	-	5	-		
Turn-on delay time	$t_{d(on)}$	-	6.5	-	ns	$V_{GS}=10V,$ $V_{DD}=30V,$ $R_{G_ext}=5\Omega, I_D=20A$
Rise time	t_r	-	8	-		
Turn-off delay time	$t_{d(off)}$	-	38	-		
Fall time	t_f	-	16	-		
Body Diode Characteristic						
Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Body Diode Forward Voltage	V_{SD}	-	0.77	1.2	V	$V_{GS}=0V, I_{SD}=30A$
Body Diode Continuous Forward Current	I_S	-	-	100	A	$TC=25^{\circ}C$
Body Diode Pulsed Current	I_S pulse	-	-	260	A	$TC=25^{\circ}C$
Body Diode Reverse Recovery Time	t_{rr}	-	39	-	ns	$I_F=1A,$ $diF/dt=100A/\mu s$
Body Diode Reverse Recovery Charge	Q_{rr}	-	45	-	nC	


■ RATING AND CHARACTERISTIC CURVES

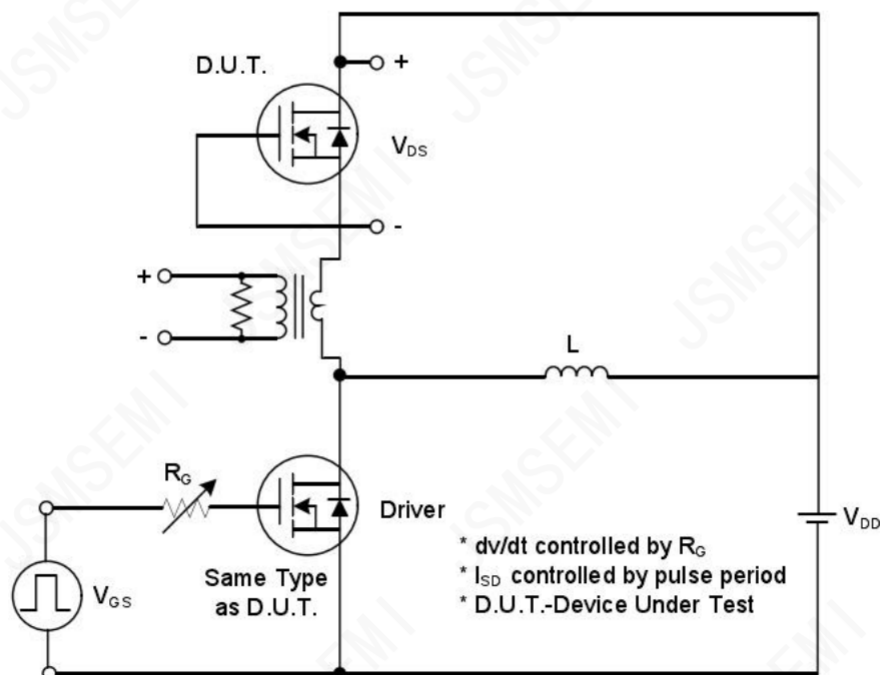


Peak Diode Recovery dv/dt Test Circuit

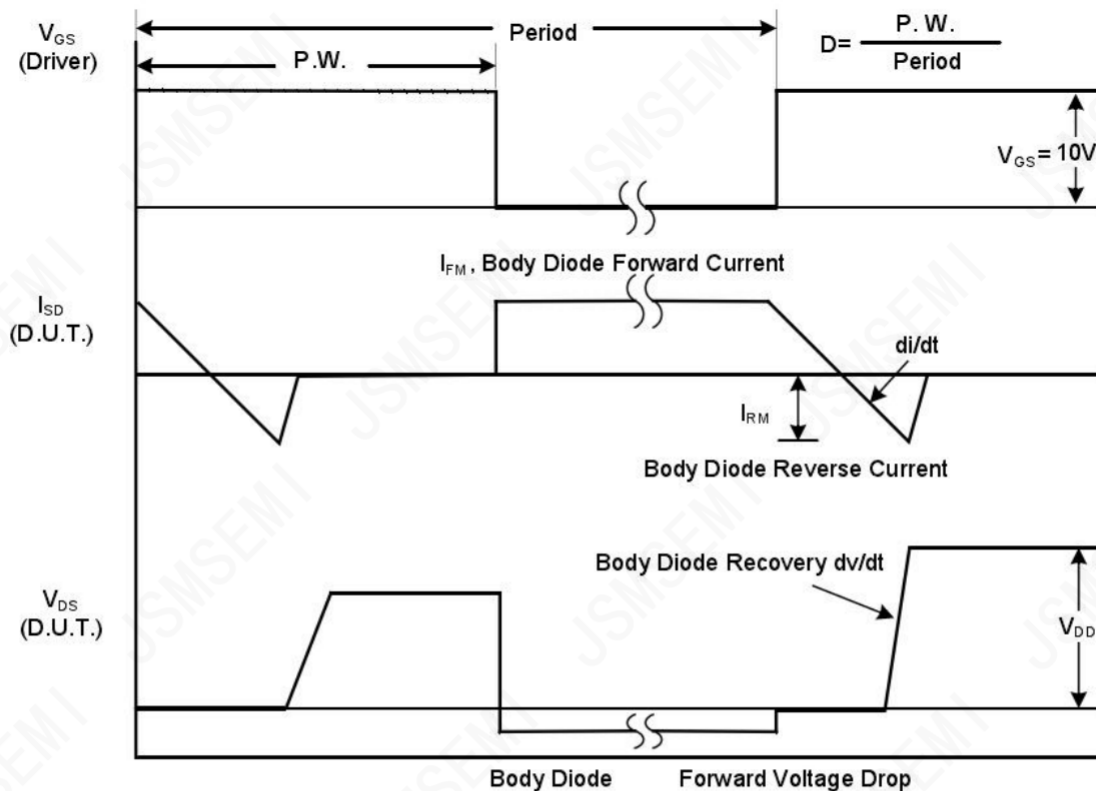


Peak Diode Recovery dv/dt Waveforms

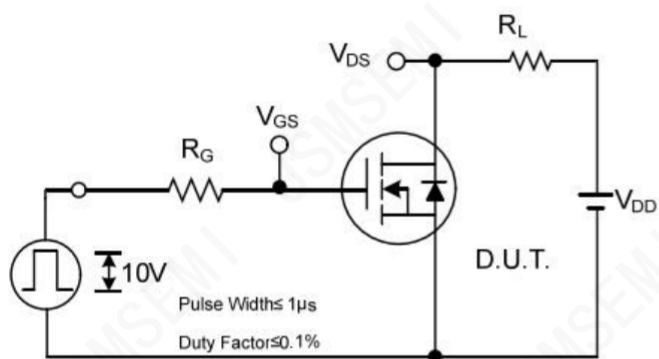


Switching Test Circuit

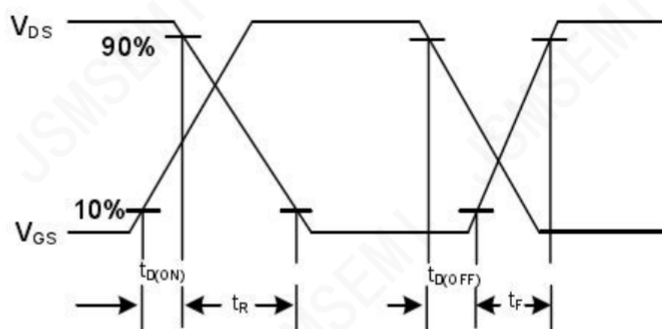


Switching Waveforms

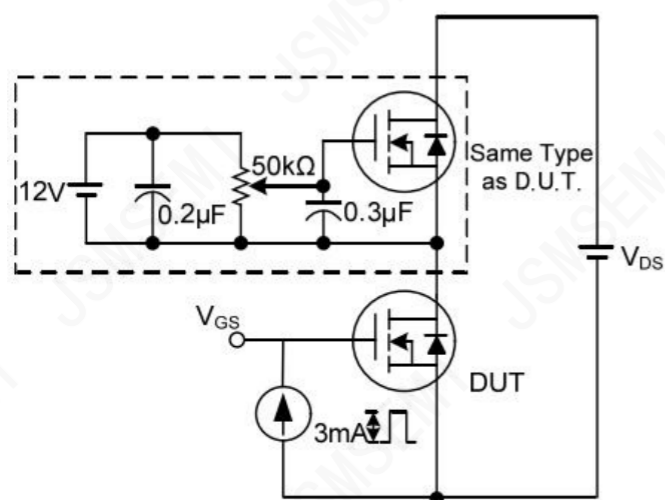


Gate Charge Test Circuit

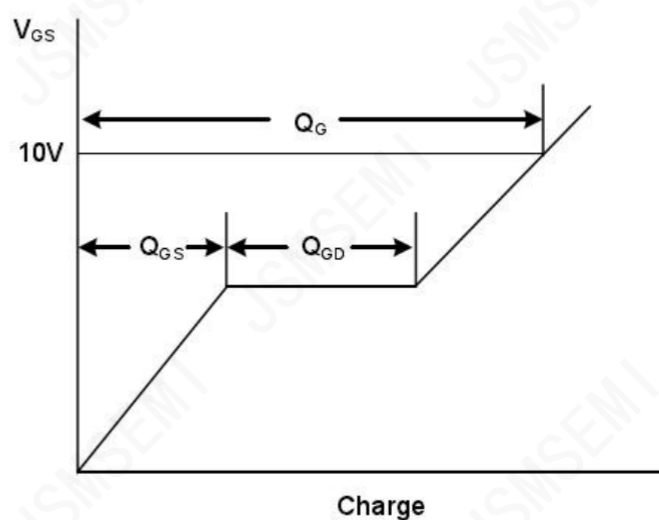

Gate Charge Waveform

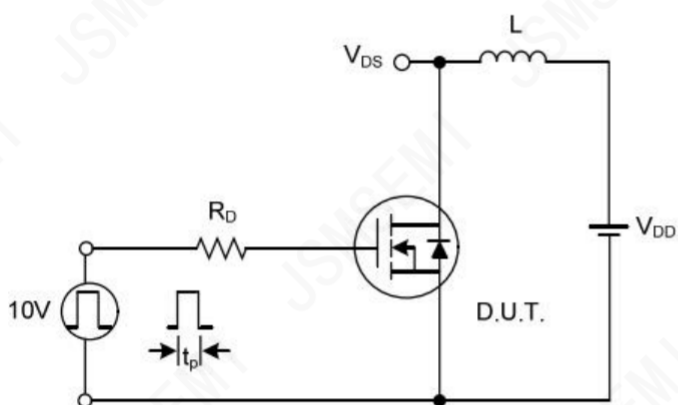

Unclamped Inductive Switching Test Circuit

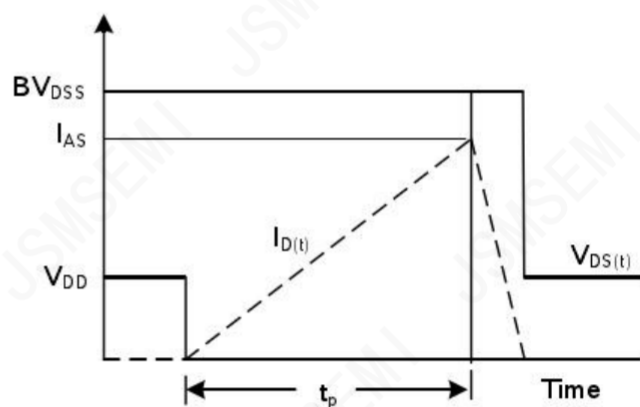

Unclamped Inductive Switching Waveforms

■ Typical Electrical and Thermal Characteristics Diagrams

Figure 1: Output Characteristics

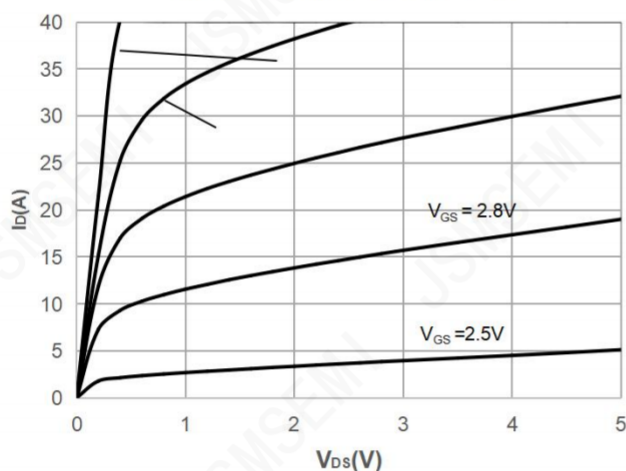


Figure 2: Typical Transfer Characteristics

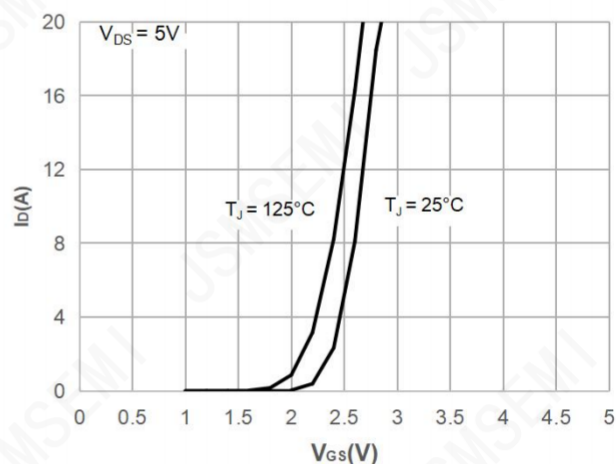


Figure 3: On-resistance vs. Drain Current

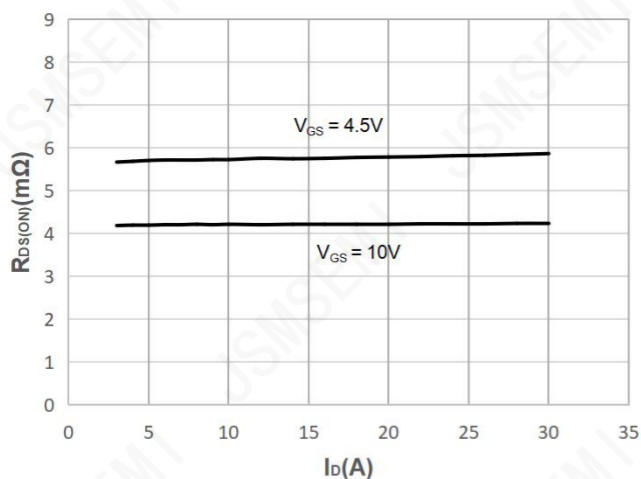


Figure 4: Body Diode Characteristics

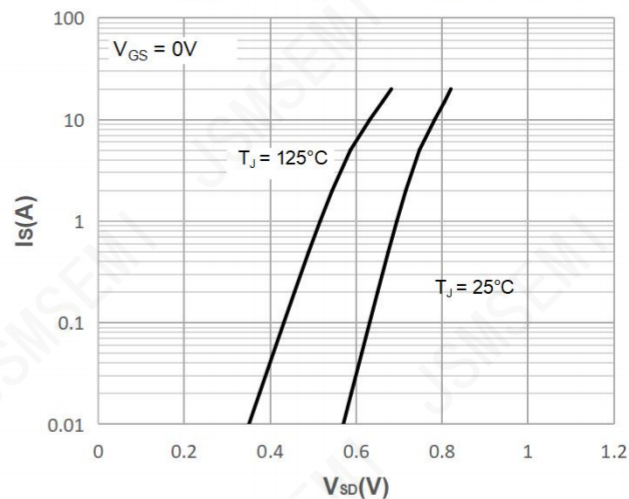


Figure 5: Gate Charge Characteristics

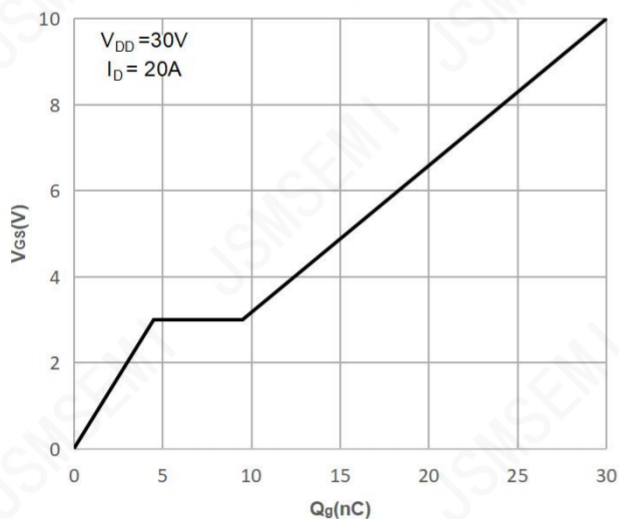


Figure 6: Capacitance Characteristics

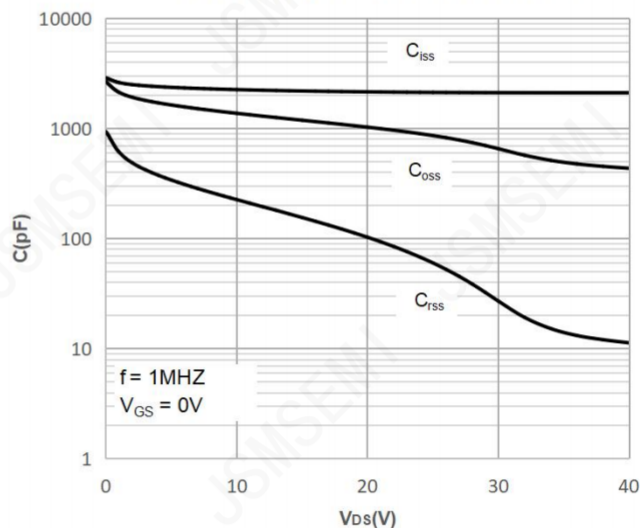
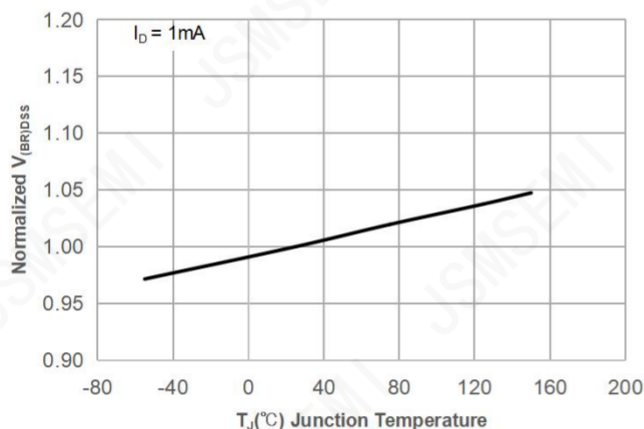
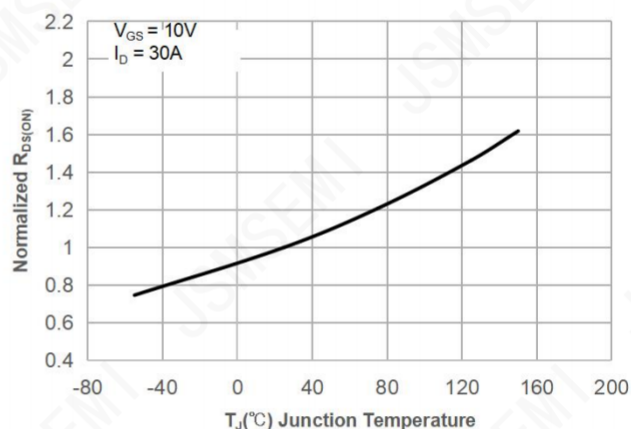
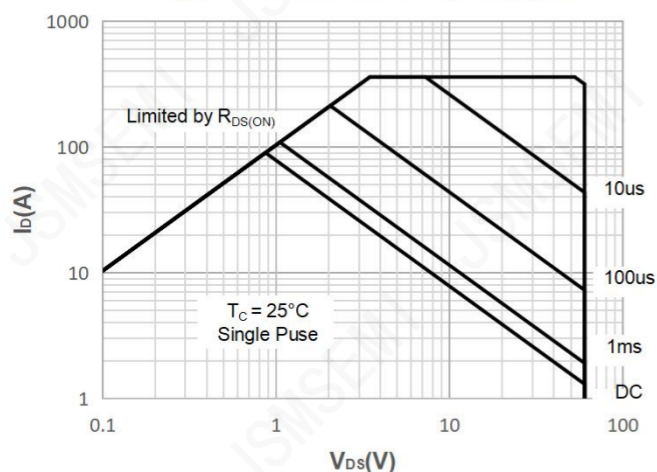
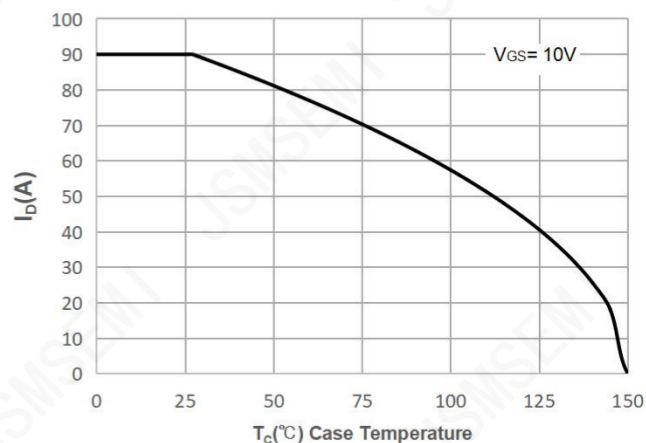
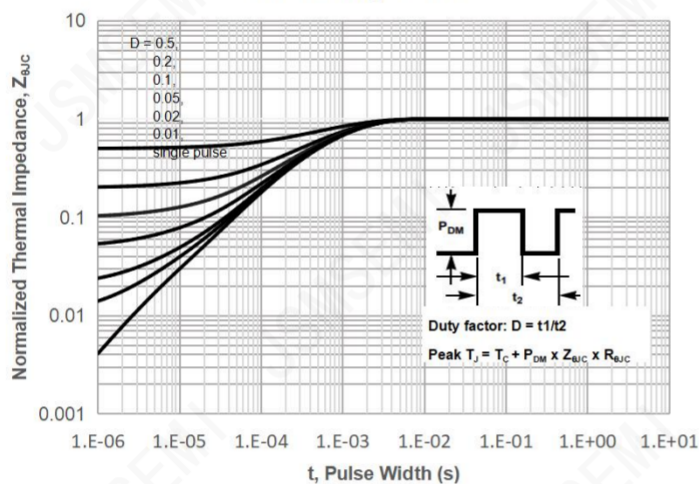
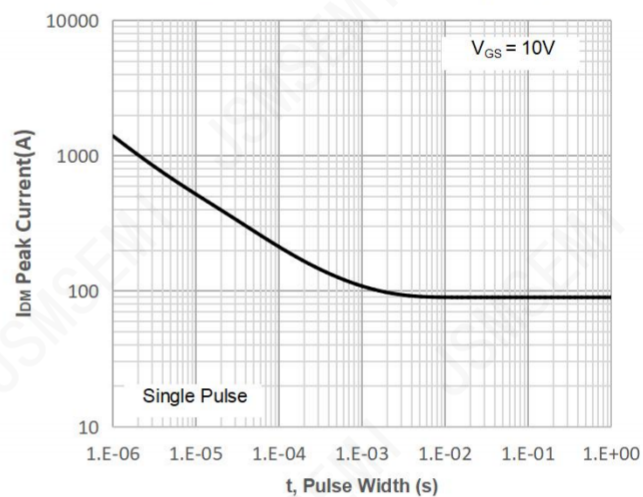
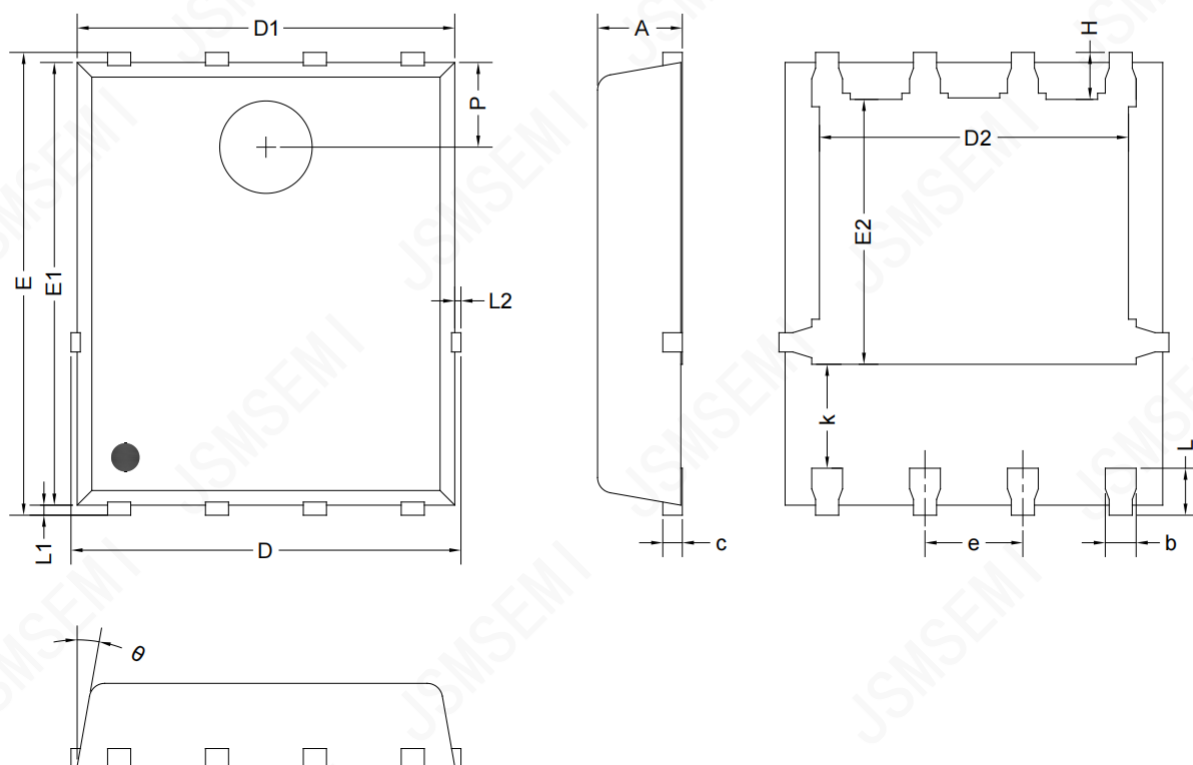


Figure 7: Normalized Breakdown voltage vs. Junction Temperature

Figure 8: Normalized on Resistance vs. Junction Temperature

Figure 9: Maximum Safe Operating Area

Figure 10: Maximum Continuous Drain Current vs. Case Temperature

Figure 11: Normalized Maximum Transient Thermal Impedance

Figure 12: Peak Current Capacity


Package Information

DFN5060-8L



Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	1.000	1.100	1.200
b	0.350	0.400	0.450
c	0.210	0.250	0.340
D	4.800	-	5.100
D1	4.800	4.900	5.000
D2	3.910	4.010	4.110
E	5.900	6.000	6.100
E1	5.700	5.750	5.800
E2	3.340	3.440	3.540
e	1.270 BSC		
H	0.510	0.610	0.710
k	1.100	-	-
L	0.510	0.610	0.710
L1	0.060	0.130	0.200
L2	-	-	0.100
P	1.000	1.100	1.200
θ	8°	10°	12°

NOTE: This drawing is subject to change without notice.

Revision History

Rev.	Change	Date
V1.0	Initial version	6/27/2021

Important Notice

JSMSEMI Semiconductor (JSMSEMI) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC JSMSEMI PRODUCTS ARE SPECIFICALLY DESIGNATED BY JSMSEMI FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF JSMSEMI PRODUCTS WHICH JSMSEMI HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER' S RISK.

JSMSEMI assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using JSMSEMI products.

Resale of JSMSEMI products or services with statements diferent from or beyond the parameters stated by JSMSEMI for that product or service voids all express and any implied warranties for the associated JSMSEMI product or s ervice. JSMSEMI is not responsible or liable for any such statements.

JSMSEMI All Rights Reserved. Information and data in this document are owned by JSMSEMI wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from JSMSEMI.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the JSMSEMI product that you intend to use.

For additional information please contact Kevin@jsmsemi.com or visit www.jsmsemi.com