

SAMZO REAC/ROHS


| REV | ECN NO | DESRIPTION | DESIGN | APPROVAL | DATE |
|---|---|---|---|---|---|
| A1 | NEW | Replace frame | | | 2019.06.12 |
| | | | | | |

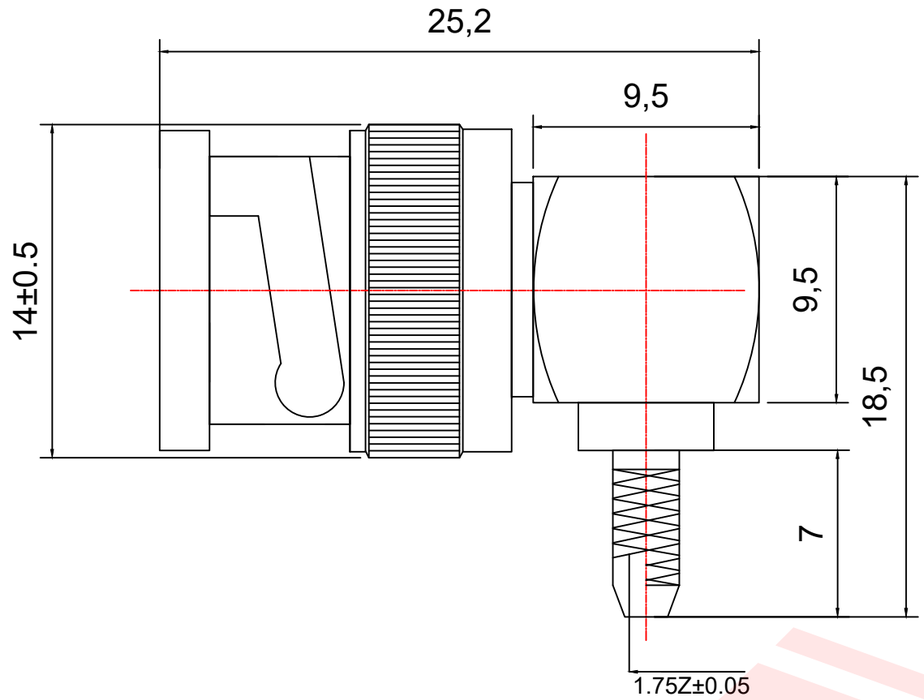


Technical Requirements

1. Frequency: 0~3 GHz
2. Impedance: 50 Ω
3. VSWR: ≤ 1.35
4. Operating Voltage: 500 V
5. Withstand Voltage: 1500 V
6. Insulation Resistance: ≥ 5000 MΩ
7. Contact Resistance: Inner conductor ≤ 1.5 mΩ
   Outer conductor ≤ 1 mΩ
8. Insertion Loss: ≤ 0.3 dB
9. Unspecified tolerances shall be ±0.2

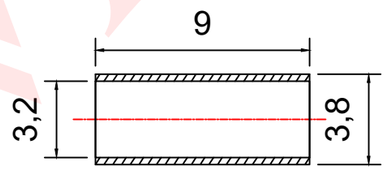



# 配件:压接管闷盖

BNC-JW-252-W0-N

- Surface treatment镀层:亮镍
- Pin position脚位:卧式90° 压接
- Length体长:25.2mm
- Product number编号:JW-1.5
- Product series系列:BNC同轴射频天线座

| ITEM | DESCRIPTION | MATERIAL | QTY | FINSH/COLOR | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| C | 闷盖/压接管 | 黄铜 | 1 | 镀镍 | | | | | |
| C | 插孔 | HPB59-1 | 1 | ------ | | | | GENERAL TOLERANCE | |
| B | 绝缘体 | 聚四氟乙烯 | 1 | ------ | | | | ≥0~2< | ±0.15 |
| A | 主体 | 黄铜 | 1 | 镀镍 | DESIGN | WANGGUIFA | 2018.06.12 | ≥2~5< | ±0.25 |
| | | | | | CHECKED | ZHENGUILAN | 2018.06.12 | ≥0~2< | ±0.15 |
| | | | | | APPROVED | LILIANJIANG | 2018.06.14 | ≥5 | ±0.35 |

FIRST VIEW



| SCALE | 1:1 | UNIT | mm |
|---|---|---|---|

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.SANCNN.COM

SAMZO COMPONENTS
Electronic switch and connector manufacturer

TITLE:
BNC弯公头JW-1.5压接50-1.5

DWG NO: BNCJ15-P058

PART NO: BNCJ15-021453

MODEL NO: BNC-JW-252-W0-N

NAME: BNC COAXIAL RF CONNECTOR