



钜地半导体
Tudi Semiconductor

Product Specification

TUDI-M95M01-RMN6TP

1-Mbit serial SPI bus EEPROM

网址 www.sztdbdt.com Q

用芯智造 · 卓越品质


**semiconductor device
manufacturer**

- Design
- research and development
- production
- and sales



Features

- Compatible with the Serial Peripheral Interface (SPI) bus
- Memory array
 - 1 Mbit (128 Kbytes) of EEPROM
 - Page size: 256 bytes
- Write
 - Byte Write within 5 ms
 - Page Write within 5 ms
- Additional Write lockable page (Identification page)
- Write Protect: quarter, half or whole memory array
- High-speed clock: 16 MHz
- Single supply voltage:
 - 1.8 V to 5.5 V for M95M01-R
- Operating temperature range: from -40 °C up to +85 °C
- Enhanced ESD protection
- More than 4 million Write cycles
- More than 200-years data retention
- Package: – SOP8

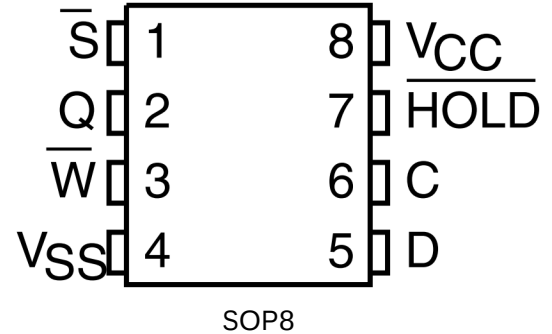

Description

The M95M01 devices are Electrically Erasable PROgrammable Memories (EEPROMs) organized as 131072 x 8 bits, accessed through the SPI bus.

The M95M01-R can operate with a supply range from 1.8 V to 5.5 V. This device is guaranteed over the -40 °C/+85 °C temperature range.

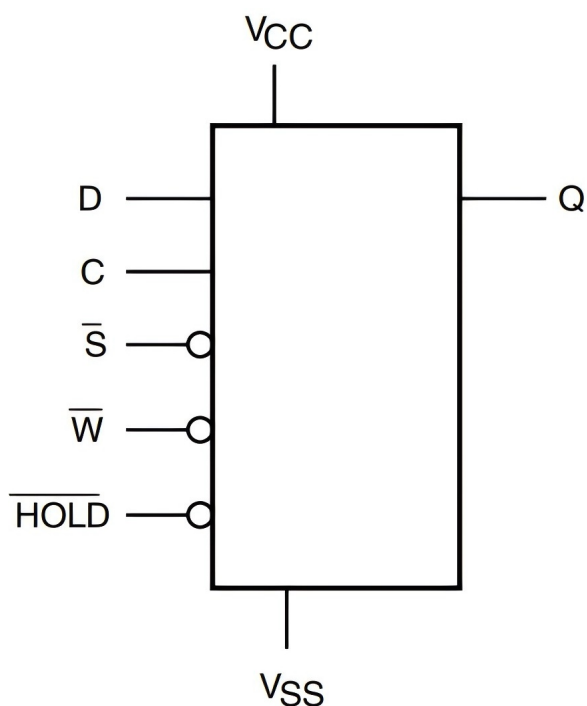


Figure 1. Logic diagram

The SPI bus signals are C, D and Q, as shown in Figure 1 and Table 1. The device is selected when Chip Select (S) is driven low. Communications with the device can be interrupted when the HOLD is driven low.

Table 1. Signal names

Signal name	Function	Direction
C	Serial Clock	Input
D	Serial Data Input	Input
Q	Serial Data Output	Output
S	Chip Select	Input
W	Write Protect	Input
HOLD	Hold	Input
V _{CC}	Supply voltage	-
V _{SS}	Ground	-

Memory organization

The memory is organized as shown in the following figure.

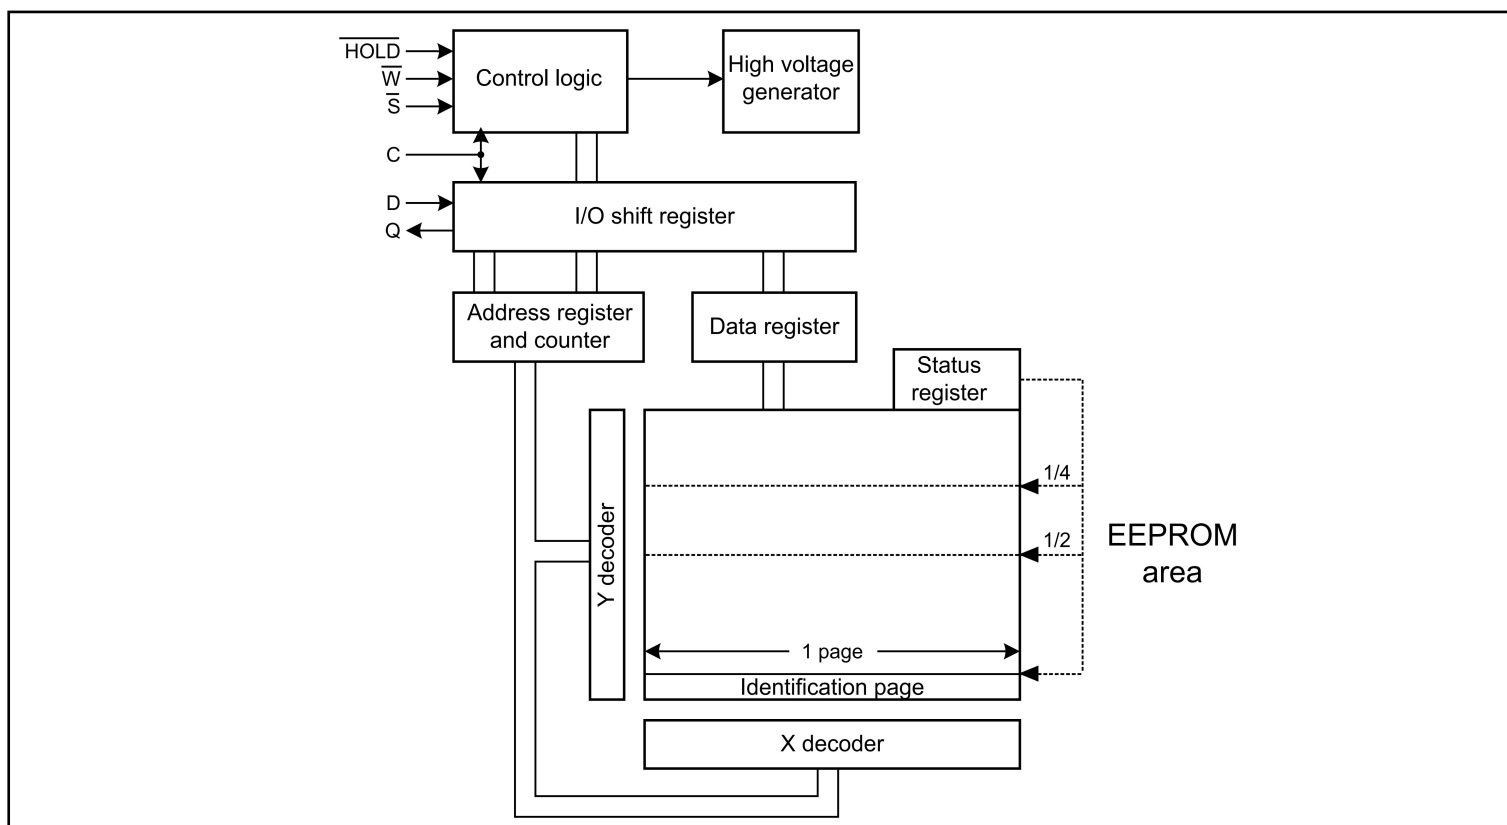


Figure 2. Block diagram



Signal description

During all operations, V_{CC} must be held stable and within the specified valid range: $V_{CC}(\min)$ to $V_{CC}(\max)$. All of the input and output signals must be held high or low (according to voltages of V_{IH} , V_{OH} , V_{IL} or V_{OL} , as specified : DC and AC parameters). These signals are described next.

Serial Data Output (Q)

This output signal is used to transfer data serially out of the device. Data is shifted out on the falling edge of Serial Clock (C).

Serial Data Input (D)

This input signal is used to transfer data serially into the device. It receives instructions, addresses, and the data to be written. Values are latched on the rising edge of Serial Clock (C).

Serial Clock (C)

This input signal provides the timing of the serial interface. Instructions, addresses, or data present at Serial Data Input (D) are latched on the rising edge of Serial Clock (C). Data on Serial Data Output (Q) change from the falling edge of Serial Clock (C).

Chip Select (S)

When this input signal is high, the device is deselected and Serial Data Output (Q) is at high impedance. The device is in the Standby Power mode, unless an internal Write cycle is in progress. Driving Chip Select (S) low selects the device, placing it in the Active Power mode. After power-up, a falling edge on Chip Select (S) is required prior to the start of any instruction.

Hold (HOLD)

The Hold (HOLD) signal is used to pause any serial communications with the device without deselecting the device. During the Hold condition, the Serial Data Output (Q) is high impedance, and Serial Data Input (D) and Serial Clock (C) are Don't Care. To start the Hold condition, the device must be selected, with Chip Select (S) driven low.

Write Protect (W)

The main purpose of this input signal is to freeze the size of the area of memory that is protected against Write instructions (as specified by the values in the BP1 and BP0 bits of the Status Register). This pin must be driven either high or low, and must be stable during all Write instructions.

V_{CC} supply voltage

V_{CC} is the supply voltage.

V_{SS} ground

V_{SS} is the reference for all signals, including the V_{CC} supply voltage.

Connecting to the SPI bus

All instructions, addresses and input data bytes are shifted in to the device, most significant bit first. The Serial Data Input (D) is sampled on the first rising edge of the Serial Clock (C) after Chip Select (S) goes low.

All output data bytes are shifted out of the device, most significant bit first. The Serial Data Output (Q) is latched on the first falling edge of the Serial Clock (C) after the instruction (such as the Read from Memory Array and Read Status Register instructions) have been clocked into the device.

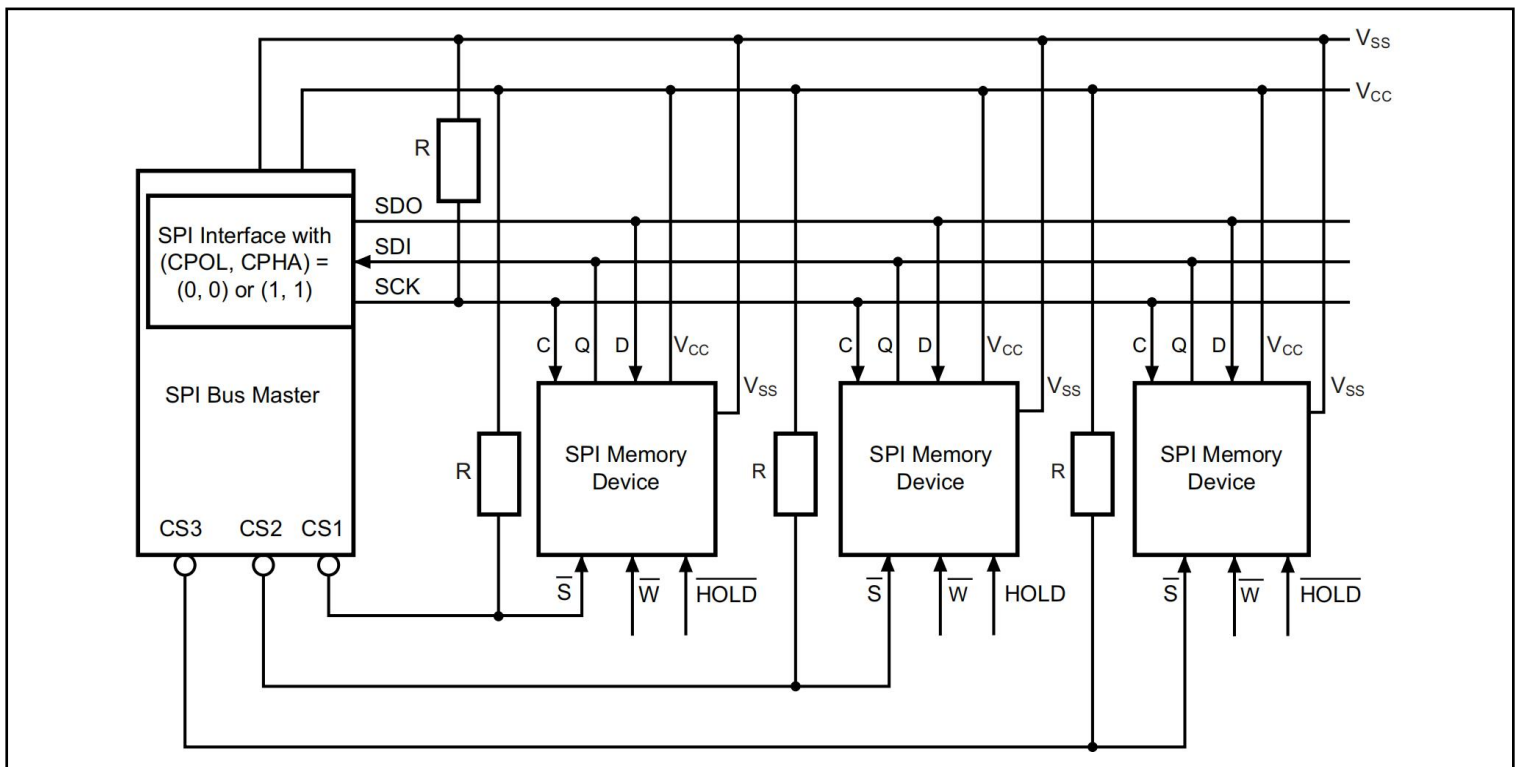


Figure 3. Bus master and memory devices on the SPI bus

1. The Write Protect (W) and Hold (HOLD) signals should be driven, high or low as appropriate. Figure3 shows an example of three memory devices connected to an SPI bus master. Only one memory device is selected at a time, so only one memory device drives the Serial Data Output (Q) line at a time. The other memory devices are high impedance.

The pull-up resistor R (represented in Figure 3) ensures that a device is not selected if the Bus Master leaves the S line in the high impedance state.

In applications where the Bus Master may leave all SPI bus lines in high impedance at the same time (for example, if the Bus Master is reset during the transmission of an instruction), the clock line (C) must be connected to an external pull-down resistor so that, if all inputs/outputs become high impedance, the C line is pulled low (while the S line is pulled high): this ensures that S and C do not become high at the same time, and so, that the t_{SHCH} requirement is met. The typical value of R is 100 k Ω .



SPI modes

These devices can be driven by a microcontroller with its SPI peripheral running in either of the following two modes:

- CPOL=0, CPHA=0
- CPOL=1, CPHA=1

For these two modes, input data is latched in on the rising edge of Serial Clock (C), and output data is available from the falling edge of Serial Clock (C).

The difference between the two modes, as shown in Figure 4, is the clock polarity when the bus master is in Stand-by mode and not transferring data:

- C remains at 0 for (CPOL=0, CPHA=0)
- C remains at 1 for (CPOL=1, CPHA=1)

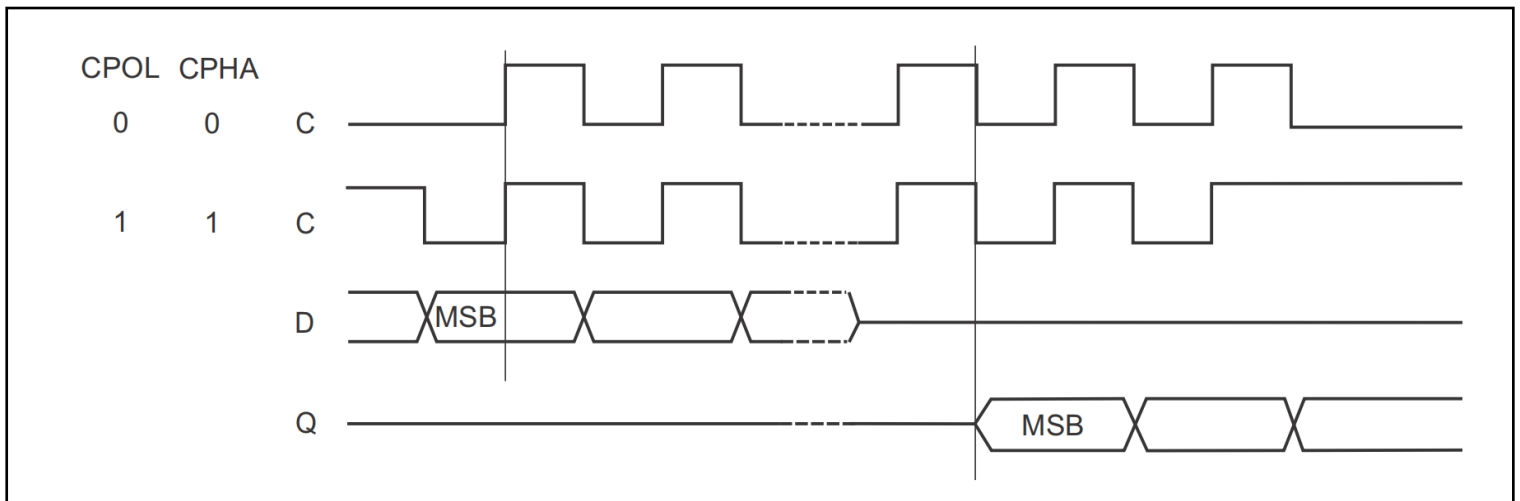


Figure 4. SPI modes supported

Operating features

Supply voltage (V_{CC})

Operating supply voltage (V_{CC})

Prior to selecting the memory and issuing instructions to it, a valid and stable V_{CC} voltage within the specified $[V_{CC}(\min), V_{CC}(\max)]$ range must be applied (see Operating conditions : DC and AC parameters). This voltage must remain stable and valid until the end of the transmission of the instruction and, for a Write instruction, until the completion of the internal write cycle (t_w). In order to secure a stable DC supply voltage, it is recommended to decouple the V_{CC} line with a suitable capacitor (usually of the order of 10 nF to 100 nF) close to the V_{CC}/V_{SS} device pins.



Device reset

In order to prevent erroneous instruction decoding and inadvertent Write operations during power-up, a power-on-reset (POR) circuit is included. At power-up, the device does not respond to any instruction until V_{CC} reaches the POR threshold voltage. This threshold is lower than the minimum V_{CC} operating voltage (see Operating conditions).

At power-up, when V_{CC} passes over the POR threshold, the device is reset and is in the following state:

- in Standby Power mode,
- deselected,
- Status Register values:
 - The Write Enable Latch (WEL) bit is reset to 0.
 - The Write In Progress (WIP) bit is reset to 0.
 - The SRWD, BP1 and BP0 bits remain unchanged (non-volatile bits).

It is important to note that the device must not be accessed until V_{CC} reaches a valid and stable level within the specified [$V_{CC}(\min)$, $V_{CC}(\max)$] range, as defined under Operating conditions

Power-up conditions

When the power supply is turned on, V_{CC} rises continuously from V_{SS} to V_{CC} . During this time, the Chip Select (S) line is not allowed to float but should follow the V_{CC} voltage. It is therefore recommended to connect the S line to V_{CC} via a suitable pull-up resistor (see Figure 3).

In addition, the Chip Select (S) input offers a built-in safety feature, as the S input is edge-sensitive as well as level-sensitive: after power-up, the device does not become selected until a falling edge has first been detected on Chip Select (S). This ensures that Chip Select (S) must have been high, prior to going low to start the first operation.

The V_{CC} voltage has to rise continuously from 0 V up to the minimum V_{CC} operating voltage defined under Operating conditions.

Power-down

During power-down (continuous decrease of the V_{CC} supply voltage below the minimum V_{CC} operating voltage defined under Operating conditions), the device must be:

- deselected (Chip Select S should be allowed to follow the voltage applied on V_{CC}),
- in Standby Power mode (there should not be any internal write cycle in progress).

Active Power and Standby Power modes

When Chip Select (S) is low, the device is selected, and in the Active Power mode. The device consumes I_{CC} .

When Chip Select (S) is high, the device is deselected. If a Write cycle is not currently in progress, the device then goes into the Standby Power mode, and the device consumption drops to I_{CC1} , as specified in DC characteristics.



Hold condition

The Hold (HOLD) signal is used to pause any serial communications with the device without resetting the clocking sequence.

To enter the Hold condition, the device must be selected, with Chip Select (S) low.

During the Hold condition, the Serial Data Output (Q) is high impedance, and the Serial Data Input (D) and the Serial Clock (C) are Don't Care.

Normally, the device is kept selected for the whole duration of the Hold condition.

Deselecting the device while it is in the Hold condition has the effect of resetting the state of the device, and this mechanism can be used if required to reset any processes that had been in progress.^{(a) (b)}

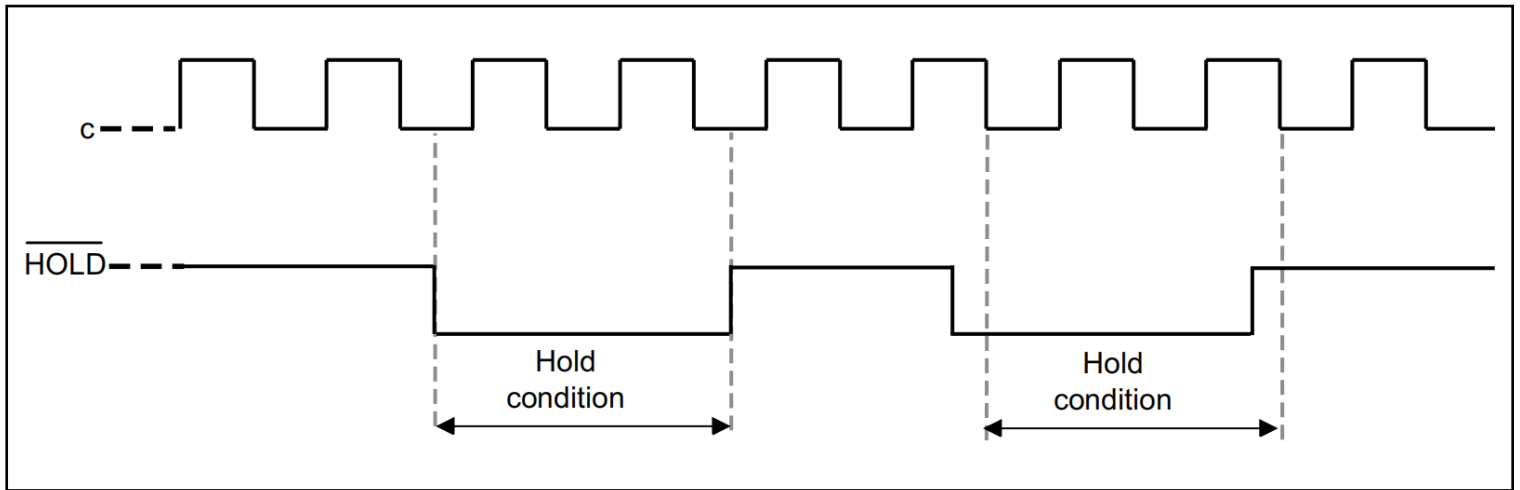


Figure5. Hold condition activation

a. This resets the internal logic, except the WEL and WIP bits of the Status Register.

b. In the specific case where the device has shifted in a Write command (Inst + Address + data bytes, each data byte being exactly 8 bits), deselecting the device also triggers the Write cycle of this decoded command.

The Hold condition starts when the Hold (HOLD) signal is driven low when Serial Clock (C) is already low (as shown in Figure 5).

Figure 5 also shows what happens if the rising and falling edges are not timed to coincide with Serial Clock (C) being low.

Status Register

The Status Register contains a number of status and control bits that can be read or set (as appropriate) by specific instructions. Read Status Register (RDSR) for a detailed description of the Status Register bits.



Data protection and protocol control

The device features the following data protection mechanisms:

- Before accepting the execution of the Write and Write Status Register instructions, the device checks whether the number of clock pulses comprised in the instructions is a multiple of eight.
- All instructions that modify data must be preceded by a Write Enable (WREN) instruction to set the Write Enable Latch (WEL) bit.
- The Block Protect (BP1, BP0) bits in the Status Register are used to configure part of the memory as read-only.
- The Write Protect (W) signal is used to protect the Block Protect (BP1, BP0) bits in the Status Register.

For any instruction to be accepted, and executed, Chip Select (S) must be driven high after the rising edge of Serial Clock (C) for the last bit of the instruction, and before the next rising edge of Serial Clock (C).

Two points should be noted in the previous sentence:

- The “last bit of the instruction” can be the eighth bit of the instruction code, or the eighth bit of a data byte, depending on the instruction (except for Read Status Register (RDSR) and Read (READ) instructions).
- The “next rising edge of Serial Clock (C)” might (or might not) be the next bus transaction for some other device on the SPI bus.

Table 2. Write-protected block size

Status Register bits		Protected block	Protected array addresses
BP1	BP0		
0	0	None	None
0	1	Upper quarter	1.80.00h-1.FF.FFh
1	0	Upper half	1.00.00h-1.FF.FFh
1	1	Whole memory	0.00.00h -1.FF.FFh

Instructions

Each command is composed of bytes (MSBit transmitted first), initiated with the instruction byte, as summarized in Table 3.

If an invalid instruction is sent (one not contained in Table 3), the device automatically enters a Wait state until deselected.

Table 3. Instruction set

Instruction	Description	Instruction format
WREN	Write Enable	0000 0110
WRDI	Write Disable	0000 0100
RDSR	Read Status Register	0000 0101
WRSR	Write Status Register	0000 0001
READ	Read from Memory Array	0000 0011
WRITE	Write to Memory Array	0000 0010
RDID ⁽¹⁾	Read Identification Page	1000 0011
WRID ⁽¹⁾	Write Identification Page	1000 0010
RDLS ⁽¹⁾	Reads the Identification Page lock status	1000 0011
LID ⁽¹⁾	Locks the Identification page in read-only mode	1000 0010

1. Instruction available only for the M95M01-D device.

Write Enable (WREN)

The Write Enable Latch (WEL) bit must be set prior to each WRITE and WRSR instruction. The only way to do this is to send a Write Enable instruction to the device.

As shown in Figure 6, to send this instruction to the device, Chip Select (S) is driven low, and the bits of the instruction byte are shifted in, on Serial Data Input (D). The device then enters a wait state. It waits for the device to be deselected by Chip Select (S) being driven high.

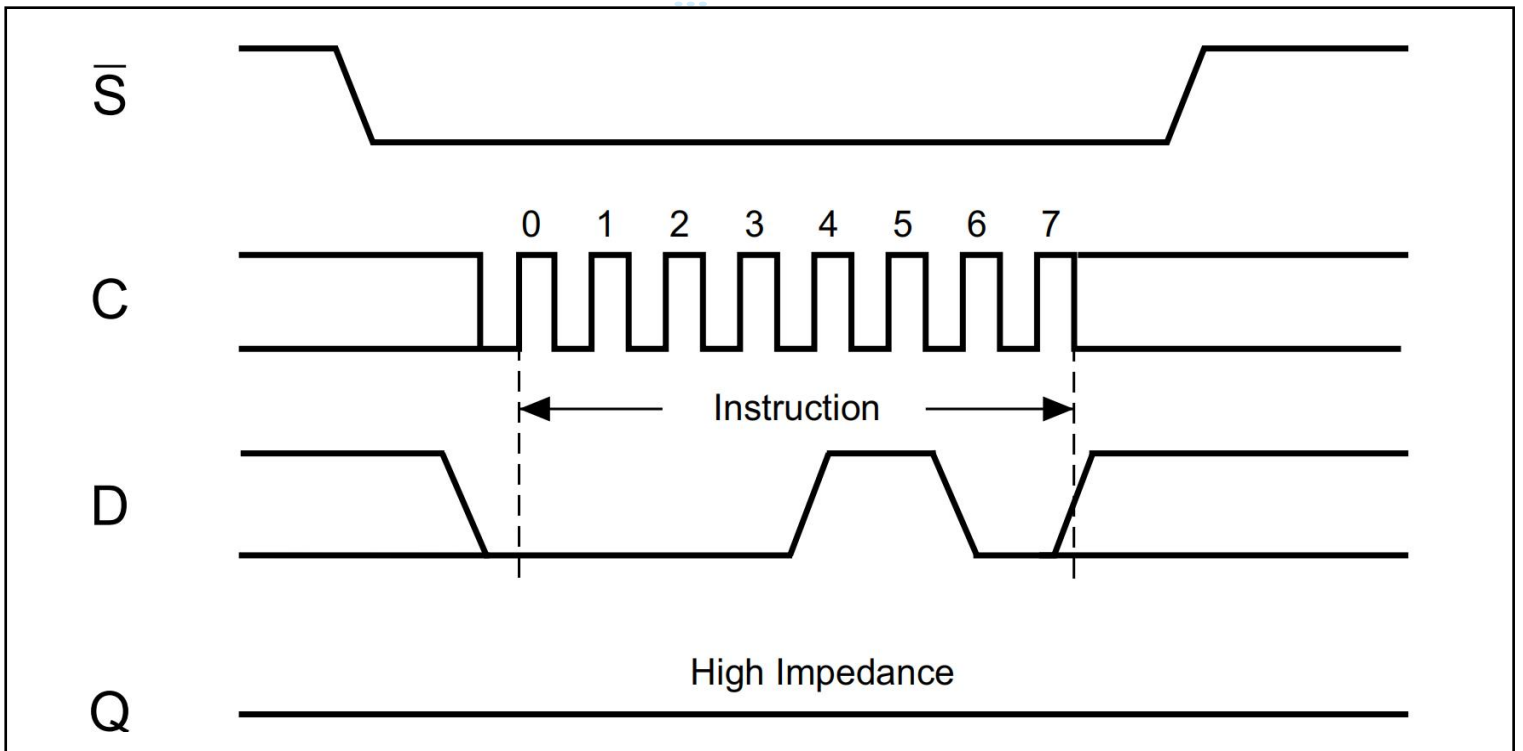


Figure 6. Write Enable (WREN) sequence

Write Disable (WRDI)

One way of resetting the Write Enable Latch (WEL) bit is to send a Write Disable instruction to the device.

As shown in Figure 7, to send this instruction to the device, Chip Select (S) is driven low, and the bits of the instruction byte are shifted in, on Serial Data Input (D).

The device then enters a wait state. It waits for the device to be deselected, by Chip Select (S) being driven high.

The Write Enable Latch (WEL) bit, in fact, becomes reset by any of the following events:

- Power-up
- WRDI instruction execution
- WRSR instruction completion
- WRITE instruction completion.

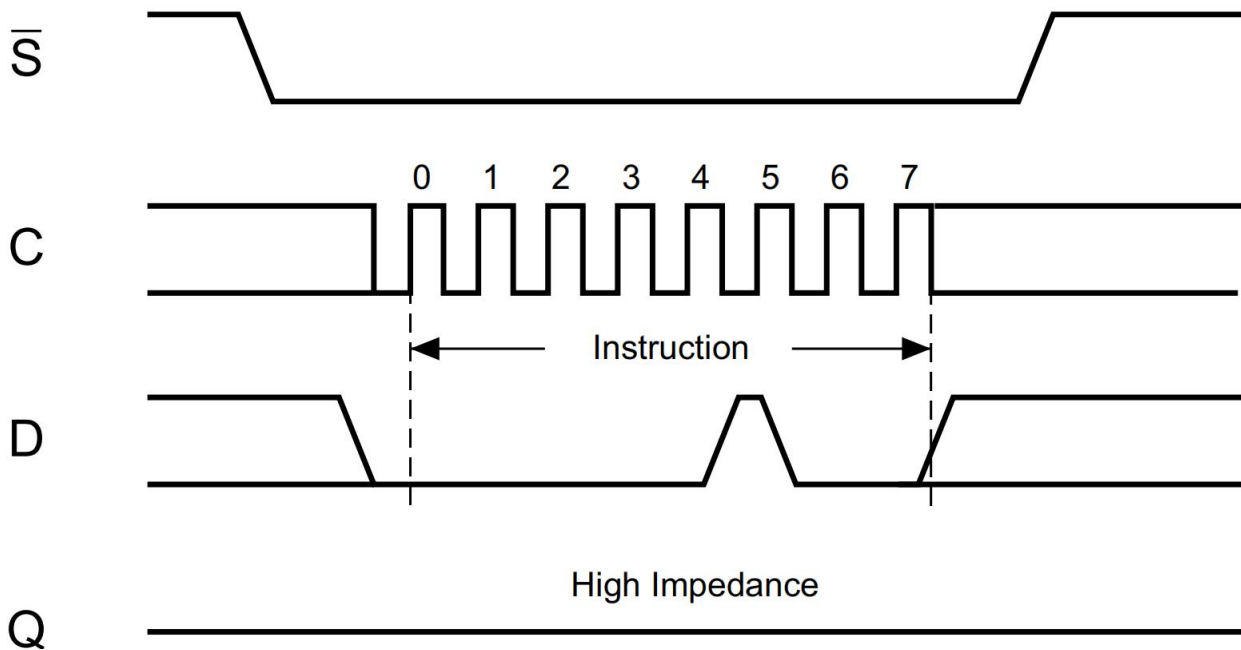


Figure 7. Write Disable (WRDI) sequence

Read Status Register (RDSR)

The Read Status Register (RDSR) instruction is used to read the Status Register. The Status Register may be read at any time, even while a Write or Write Status Register cycle is in progress. When one of these cycles is in progress, it is recommended to check the Write In Progress (WIP) bit before sending a new instruction to the device. It is also possible to read the Status Register continuously, as shown in Figure 8.

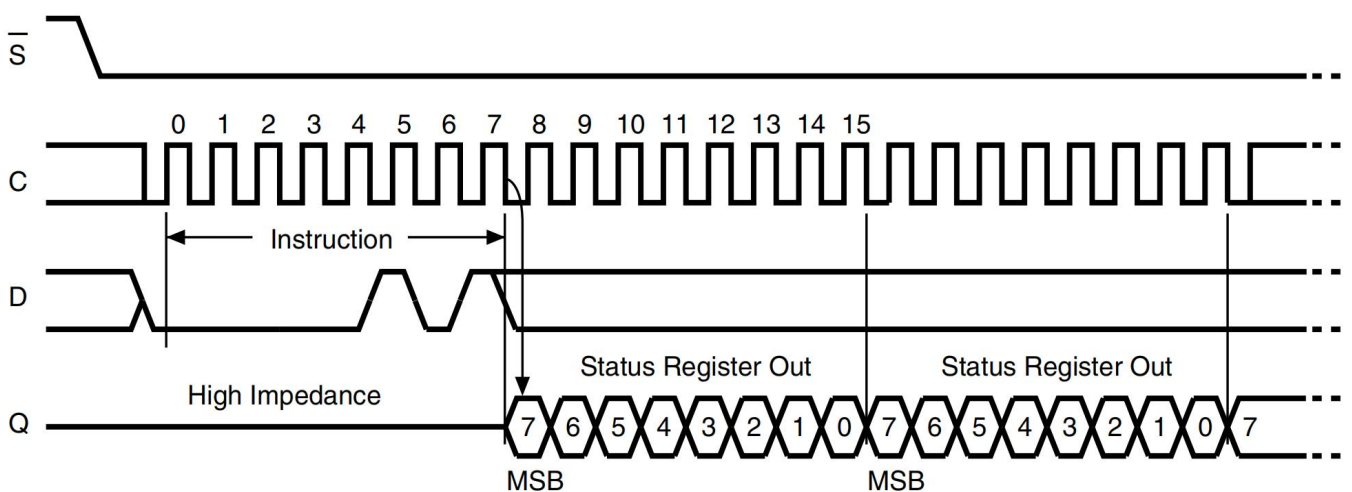


Figure 8. Read Status Register (RDSR) sequence

The status and control bits of the Status Register are as follows:



WIP bit

The Write In Progress (WIP) bit indicates whether the memory is busy with a Write or Write Status Register cycle. When set to 1, such a cycle is in progress, when reset to 0, no such cycle is in progress.

WEL bit

The Write Enable Latch (WEL) bit indicates the status of the internal Write Enable Latch. When set to 1, the internal Write Enable Latch is set. When set to 0, the internal Write Enable Latch is reset, and no Write or Write Status Register instruction is accepted.

The WEL bit is returned to its reset state by the following events:

- Power-up
- Write Disable (WRDI) instruction completion
- Write Status Register (WRSR) instruction completion
- Write (WRITE) instruction completion

BP1, BP0 bits

The Block Protect (BP1, BP0) bits are non volatile. They define the size of the area to be software-protected against Write instructions. These bits are written with the Write Status Register (WRSR) instruction. When one or both of the Block Protect (BP1, BP0) bits is set to 1, the relevant memory area (as defined in Table 2) becomes protected against Write (WRITE) instructions. The Block Protect (BP1, BP0) bits can be written provided that the Hardware Protected mode has not been set.

SRWD bit

The Status Register Write Disable (SRWD) bit is operated in conjunction with the Write Protect (W) signal. The Status Register Write Disable (SRWD) bit and Write Protect (W) signal enable the device to be put in the Hardware Protected mode (when the Status Register Write Disable (SRWD) bit is set to 1, and Write Protect (W) is driven low). In this mode, the non-volatile bits of the Status Register (SRWD, BP1, BP0) become read-only bits and the Write Status Register (WRSR) instruction is no longer accepted for execution.

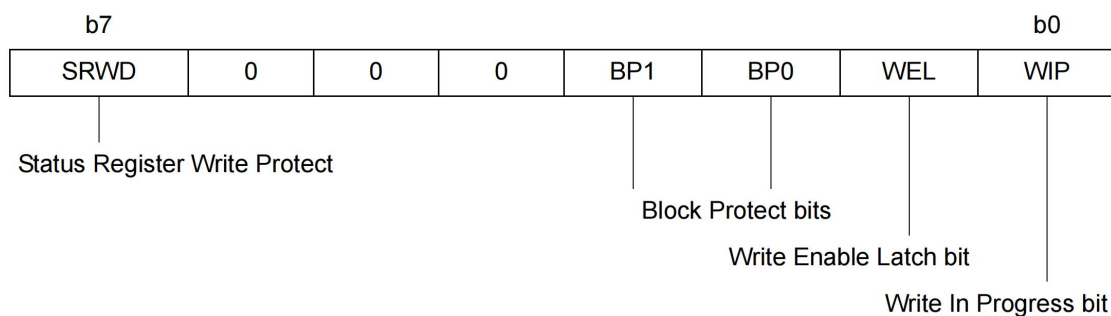


Figure9 . Status Register format



Write Status Register (WRSR)

The Write Status Register (WRSR) instruction is used to write new values to the Status Register. Before it can be accepted, a Write Enable (WREN) instruction must have been previously executed.

The Write Status Register (WRSR) instruction is entered by driving Chip Select ($\overline{S}$) low, followed by the instruction code, the data byte on Serial Data input (D) and Chip Select ($\overline{S}$) driven high. Chip Select ($\overline{S}$) must be driven high after the rising edge of Serial Clock (C) that latches in the eighth bit of the data byte, and before the next rising edge of Serial Clock (C). Otherwise, the Write Status Register (WRSR) instruction is not executed. The instruction sequence is shown in Figure 10.

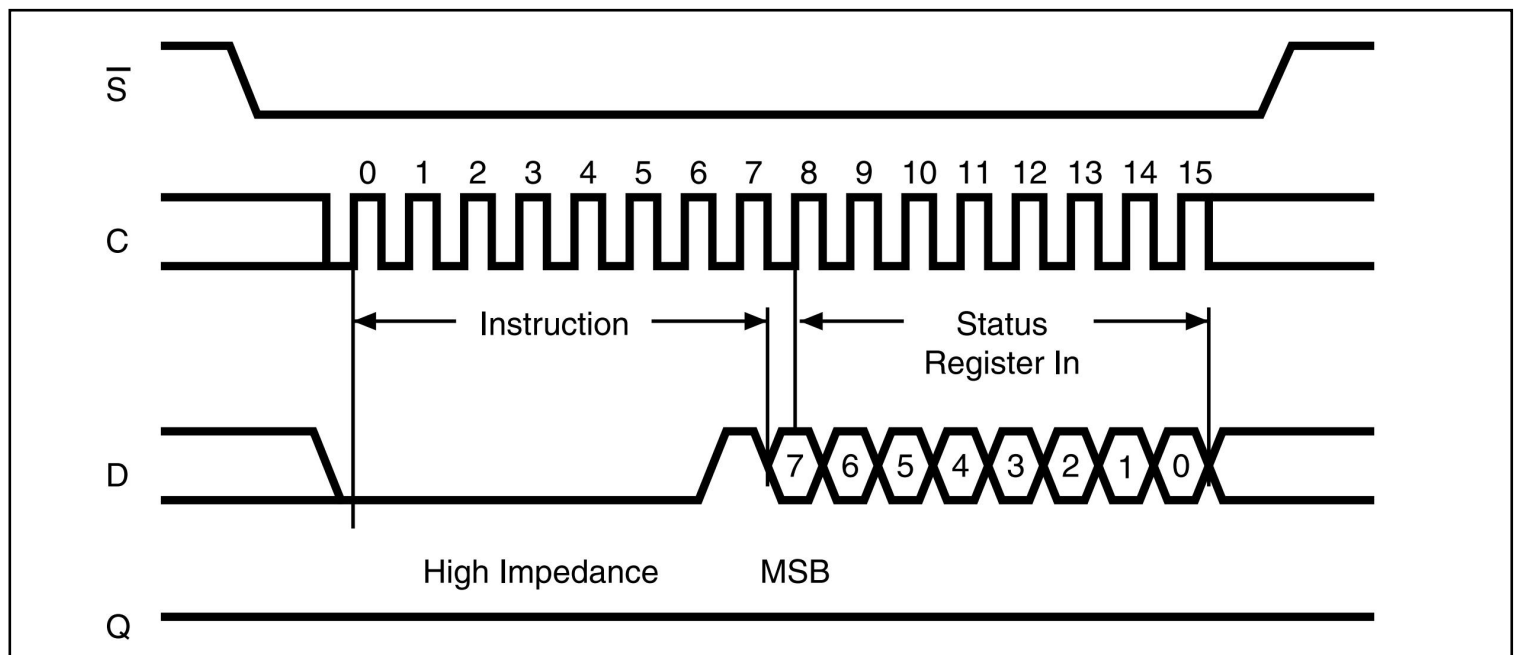


Figure 10. Write Status Register (WRSR) sequence

Driving the Chip Select ($\overline{S}$) signal high at a byte boundary of the input data triggers the self-timed Write cycle that takes t_W to complete.

While the Write Status Register cycle is in progress, the Status Register may still be read to check the value of the Write in progress (WIP) bit: the WIP bit is 1 during the self-timed Write cycle t_W , and 0 when the Write cycle is complete. The WEL bit (Write Enable Latch) is also reset at the end of the Write cycle t_w .

The Write Status Register (WRSR) instruction enables the user to change the values of the BP1, BP0 and SRWD bits:

- The Block Protect (BP1, BP0) bits define the size of the area that is to be treated as read-only, as defined in Table 2.
- The SRWD (Status Register Write Disable) bit, in accordance with the signal read on the Write Protect pin (W), enables the user to set or reset the Write protection mode of the Status Register itself, as defined in Table 4. When in Write-protected mode, the Write Status Register (WRSR) instruction is not executed.

The contents of the SRWD and BP1, BP0 bits are updated after the completion of the WRSR instruction, including the tW Write cycle.

The Write Status Register (WRSR) instruction has no effect on the b6, b5, b4, b1, b0 bits in the Status Register. Bits b6, b5, b4 are always read as 0.

Table 4. Protection modes

W signal	SRWD bit	Mode	Write protection of the Status Register	Memory content	
				Protected area ⁽¹⁾	Unprotected area ⁽¹⁾
1	0	Software-protected (SPM)	Status Register is writable(if the WREN instruction has set the WEL bit).The values in the BP1 and BP0 bits can be changed.	Write-protected	Ready to accept Write instructions
0	0				
1	1				
0	1	Hardware-protected (HPM)	Status Register is Hardware write-protected.The values in the BP1 and BP0 bits cannot be changed.	Write-protected	Ready to accept Write instructions

1. As defined by the values in the Block Protect (BP1, BP0) bits of the Status Register. See Table 2.

The protection features of the device are summarized in Table 4.

When the Status Register Write Disable (SRWD) bit in the Status Register is 0 (its initial delivery state), it is possible to write to the Status Register (provided that the WEL bit has previously been set by a WREN instruction), regardless of the logic level applied on the Write Protect (W) input pin. When the Status Register Write Disable (SRWD) bit in the Status Register is set to 1, two cases should be considered, depending on the state of the Write Protect (W) input pin:

● If Write Protect (W) is driven high, it is possible to write to the Status Register (provided that the WEL bit has previously been set by a WREN instruction).

● If Write Protect (W) is driven low, it is not possible to write to the Status Register even if the WEL bit has previously been set by a WREN instruction. (Attempts to write to the Status Register are rejected, and are not accepted for execution). As a consequence, all the data bytes in the memory area, which are Software-protected (SPM) by the Block Protect (BP1, BP0) bits in the Status Register, are also hardware-protected against data modification.



Regardless of the order of the two events, the Hardware-protected mode (HPM) can be entered by:

- either setting the SRWD bit after driving the Write Protect (W) input pin low,
- or driving the Write Protect (W) input pin low after setting the SRWD bit.

Once the Hardware-protected mode (HPM) has been entered, the only way of exiting it is to pull high the Write Protect (W) input pin.

If the Write Protect (W) input pin is permanently tied high, the Hardware-protected mode (HPM) can never be activated, and only the Software-protected mode (SPM), using the Block Protect (BP1, BP0) bits in the Status Register, can be used.

Read from Memory Array (READ)

As shown in Figure 11, to send this instruction to the device, Chip Select (S) is first driven low. The bits of the instruction byte and address bytes are then shifted in, on Serial Data Input (D). The address is loaded into an internal address register, and the byte of data at that address is shifted out, on Serial Data Output (Q).

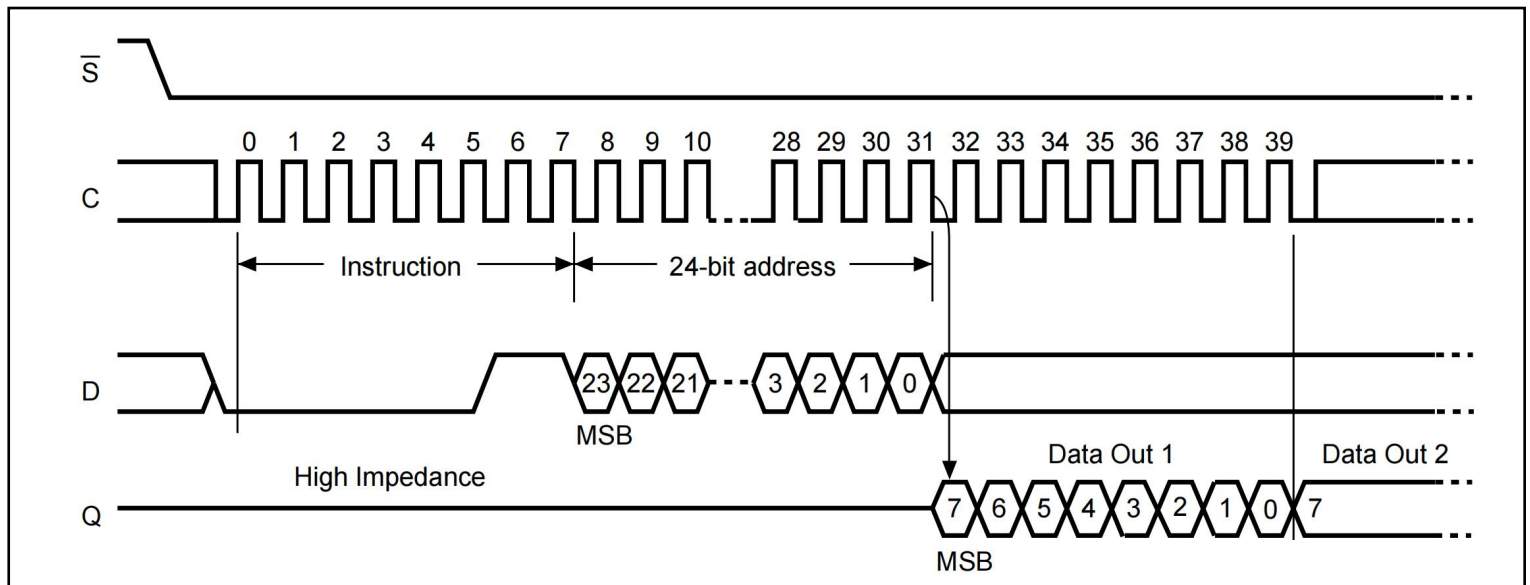


Figure 11. Read from Memory Array (READ) sequence

If Chip Select (S) continues to be driven low, the internal address register is incremented automatically, and the byte of data at the new address is shifted out.

When the highest address is reached, the address counter rolls over to zero, allowing the Read cycle to be continued indefinitely. The whole memory can, therefore, be read with a single READ instruction.

The Read cycle is terminated by driving Chip Select (S) high. The rising edge of the Chip Select (S) signal can occur at any time during the cycle.

The instruction is not accepted, and is not executed, if a Write cycle is currently in progress.



Table 5. Address range bits

Address significant bits	A16-A0 ⁽¹⁾
--------------------------	-----------------------

1. Bits A23 to A17 are Don't Care.

Write to Memory Array (WRITE)

As shown in Figure 12, to send this instruction to the device, Chip Select ($\overline{S}$) is first driven low. The bits of the instruction byte, address byte, and at least one data byte are then shifted in, on Serial Data Input (D).

The instruction is terminated by driving Chip Select ($\overline{S}$) high at a byte boundary of the input data. The self-timed Write cycle, triggered by the Chip Select ($\overline{S}$) rising edge, continues for a period t_w (as specified in AC characteristics : DC and AC parameters), at the end of which the Write in Progress (WIP) bit is reset to 0.

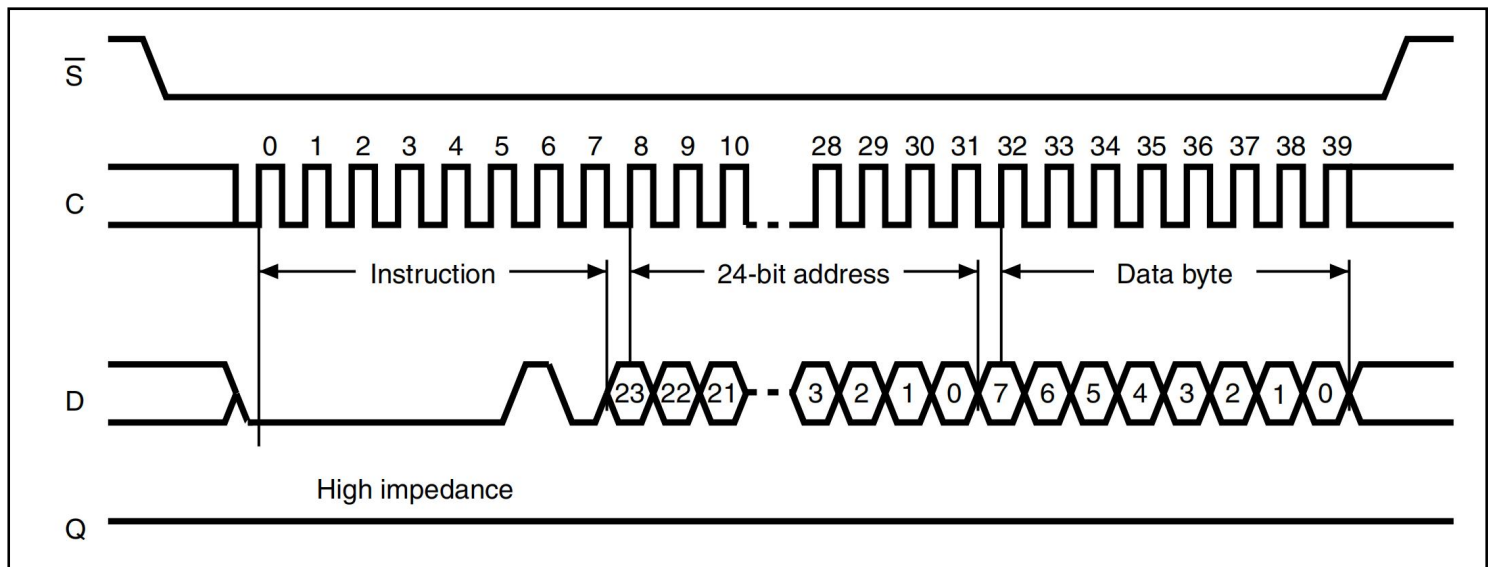


Figure 12. Byte Write (WRITE) sequence

In the case of Figure 12, Chip Select ($\overline{S}$) is driven high after the eighth bit of the data byte has been latched in, indicating that the instruction is being used to write a single byte. However, if Chip Select ($\overline{S}$) continues to be driven low, as shown in Figure 13, the next byte of input data is shifted in, so that more than a single byte, starting from the given address towards the end of the same page, can be written in a single internal Write cycle.

Each time a new data byte is shifted in, the least significant bits of the internal address counter are incremented. If more bytes are sent than will fit up to the end of the page, a condition known as “roll-over” occurs. In case of roll-over, the bytes exceeding the page size are overwritten from location 0 of the same page.



The instruction is not accepted, and is not executed, under the following conditions:

- if the Write Enable Latch (WEL) bit has not been set to 1 (by executing a Write Enable instruction just before),
- if a Write cycle is already in progress,
- if the device has not been deselected, by driving high Chip Select ($\overline{S}$), at a byte boundary (after the eighth bit, b0, of the last data byte that has been latched in),
- if the addressed page is in the region protected by the Block Protect (BP1 and BP0) bits

Note: The self-timed write cycle t_W is internally executed as a sequence of two consecutive events: [Erase addressed byte(s)], followed by [Program addressed byte(s)]. An erased bit is read as “0” and a programmed bit is read as “1”.

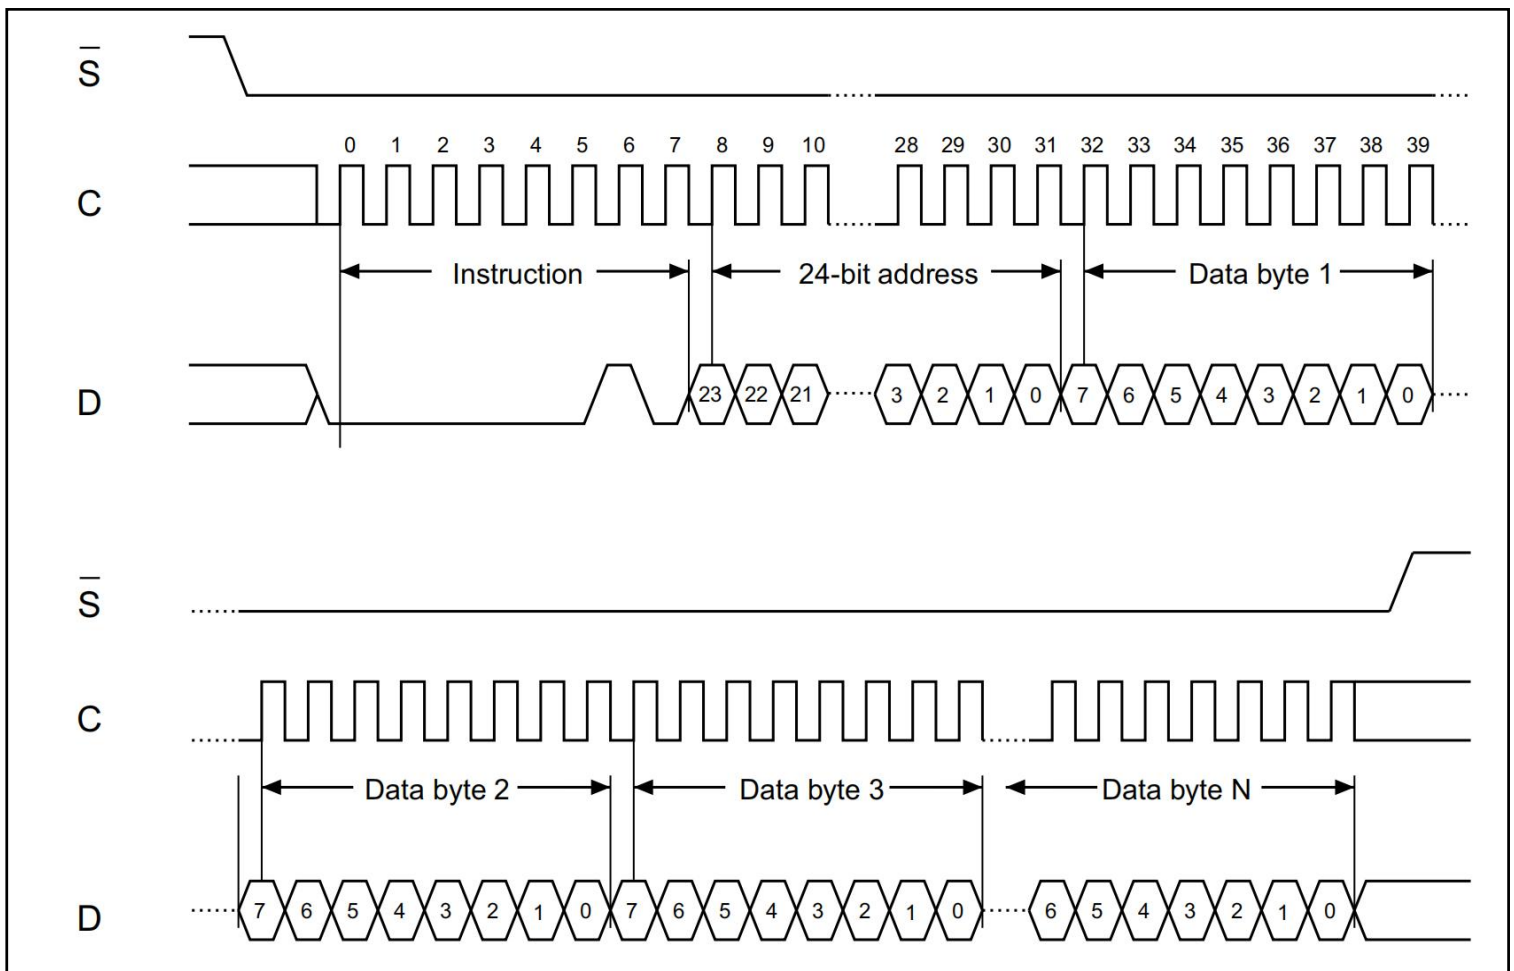


Figure 13. Page Write (WRITE) sequence



Cycling with Error Correction Code (ECC)

The ECC is an internal logic function which is transparent for the SPI communication protocol. The ECC logic is implemented on each group of four EEPROM bytes^(c). Inside a group, if a single bit out of the four bytes happens to be erroneous during a Read operation, the ECC detects this bit and replaces it with the correct value. The read reliability is therefore much improved. Even if the ECC function is performed on groups of four bytes, a single byte can be written/cycled independently. In this case, the ECC function also writes/cycles the three other bytes located in the same group^(c). As a consequence, the maximum cycling budget is defined at group level and the cycling can be distributed over the four bytes of the group: the sum of the cycles seen by byte0, byte1, byte2 and byte3 of the same group must remain below the maximum value defined in Table 10.

Power-up and delivery state

Power-up state

After power-up, the device is in the following state:

- Standby power mode,
- deselected (after power-up, a falling edge is required on Chip Select (S) before any instructions can be started),
- not in the Hold condition,
- the Write Enable Latch (WEL) is reset to 0,
- Write In Progress (WIP) is reset to 0.

The SRWD, BP1 and BP0 bits of the Status Register are unchanged from the previous power-down (they are non-volatile bits).

Initial delivery state

The device is delivered with the memory array bits and identification page bits set to all 1s (each byte = FFh). The Status Register Write Disable (SRWD) and Block Protect (BP1 and BP0) bits are initialized to 0.

Maximum ratings

Stressing the device outside the ratings listed in Table 6 may cause permanent damage to the device. These are stress ratings only, and operation of the device at these, or any other conditions outside those indicated in the operating sections of this specification, is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



Table 6. Absolute maximum ratings

Symbol	Parameter	Min.	Max.	Unit
T_{AMB}	Ambient operating temperature	-40	130	°C
T_{STG}	Storage temperature	-65	150	°C
T_{LEAD}	Lead temperature during soldering	See note ⁽¹⁾		°C
V_O	Output voltage	-0.50	$V_{CC}+0.6$	V
V_I	Input voltage	-0.50	6.5	V
V_{CC}	Supply voltage	-0.50	6.5	V
I_{OL}	DC output current (Q=0)	-	5	mA
I_{OH}	DC output current(Q=1)	-	5	mA
V_{ESD}	Electrostatic discharge voltage (human body model) ⁽²⁾		4000	V

1. Compliant with JEDEC standard J-STD-020D (for small-body, Sn-Pb or Pb free assembly), the ST ECOPACK® 7191395 specification , and the European directive on Restrictions on Hazardous Substances (RoHS directive 2011/65/EU of July 2011).

2. Positive and negative pulses applied on different combinations of pin connections, according to AEC-Q100-002 (compliant with ANSI/ESDA/JEDEC JS-001-2012, C1=100 pF, R1=1500 Ω , R2=500 Ω)

DC and AC parameters

This section summarizes the operating conditions and the DC/AC characteristics of the device.

Table 7. Operating conditions (M95M01-R, device grade 6)

Symbol	Parameter	Min.	Max.	Unit
V_{CC}	Supply voltage	1.8	5.5	V
T_A	Ambient operating temperature	-40	85	°C



Table 9. AC measurement conditions

Symbol	Parameter	Min.	Max.	Unit
C_L	Load capacitance	100		pF
-	Input rise and falltimes	-	50	ns
-	Input pulse voltages	$0.2 V_{CC}$ to $0.8 V_{CC}$		V
-	Input and output timing reference voltages	$0.3 V_{CC}$ to $0.7 V_{CC}$		V

Table 10. Cycling performance by groups of four bytes

Symbol	Parameter ⁽¹⁾	Test conditions	Min.	Max.	Unit
Ncycle	Write cycle endurance ⁽²⁾	$T_A \leq 25^\circ\text{C}$, $V_{CC}(\text{min}) < V_{CC} < V_{CC}(\text{max})$	-	4,000,000	Write cycle ⁽³⁾
		$T_A = 85^\circ\text{C}$, $V_{CC}(\text{min}) < V_{CC} < V_{CC}(\text{max})$	-	1,200,000	

1. Cycling performance for products identified by process letter K (previous products were specified with 1 million cycles at 25°C).
2. The Write cycle endurance is defined for groups of four data bytes located at addresses $[4*N, 4*N+1, 4*N+2, 4*N+3]$ where N is an integer. The Write cycle endurance is defined by characterization and qualification.
3. A Write cycle is executed when either a Page Write, a Byte Write, a WRSR, a WRID or an LID instruction is decoded. When using the Byte Write, the Page Write or the WRID instruction : Cycling with Error Correction Code (ECC).

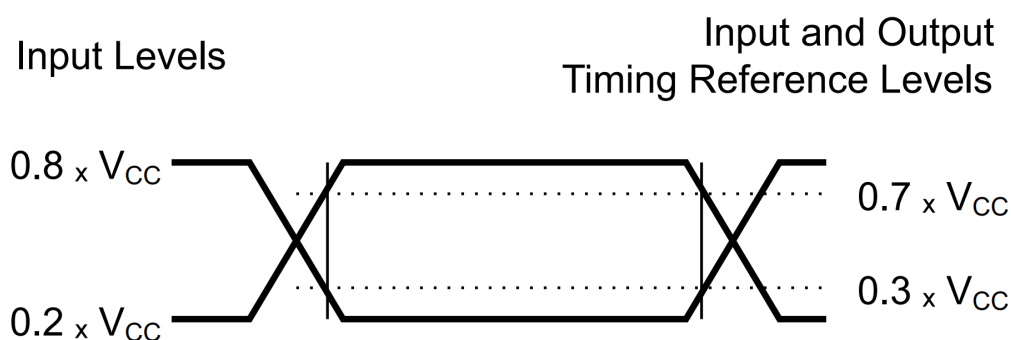


Figure 14. AC measurement I/O waveform



Table 11. Memory cell data retention

Parameter	Test conditions	Min.	Unit
Data retention ⁽¹⁾⁽²⁾	$T_A=55^{\circ}\text{C}$	200	Year

1. The data retention behavior is checked in production, while the 200-year limit is defined from characterization and qualification results.

2. For products identified by process letter K (previous products were specified with a data retention of 40 years at 55°C).

Table 12. Capacitance

Symbol	Parameter	Test conditions ⁽¹⁾	Min.	Max.	Unit
C_{OUT}	Output capacitance(Q)	$V_{OUT}=0\text{V}$	-	8	pF
C_{IN}	Input capacitance(D)	$V_{IN}=0\text{V}$	-	8	pF
	Input capacitance (other pins)	$V_{IN}=0\text{V}$	-	6	pF

1. Sampled only, not 100% tested, at $T_A = 25^{\circ}\text{C}$ and a frequency of 5 MHz.

Table 13. DC characteristics

Symbol	Parameter	Test conditions	Min	Max	Unit
I_{LI}	Input leakage current	$V_{IN}=V_{SS}$ or V_{CC}	-	± 2	μA
I_{LO}	Output leakage current	$S=V_{CC}, V_{OUT}=V_{SS}$ or V_{CC}	-	± 2	μA
I_{CC}	Supply current(Read)	$C=0.1 V_{CC}/0.9 V_{CC}$ at 2 MHz, $V_{CC}=1.8\text{V}^{(1)}, Q=\text{open}$	-	1.5	mA
		$C=0.1 V_{CC}/0.9 V_{CC}$ at 5 MHz, $V_{CC}=1.8\text{V}^{(1)}, Q=\text{open}$	-	$2^{(2)}$	mA
		$C=0.1 V_{CC}/0.9 V_{CC}$ at 5 MHz, $V_{CC}=2.5\text{V}, Q=\text{open}$	-	4	mA
		$C=0.1 V_{CC}/0.9 V_{CC}$ at 10 MHz, $V_{CC}=2.5\text{V}, Q=\text{open}$		$2^{(2)}$	mA
		$C=0.1 V_{CC}/0.9 V_{CC}$ at 5 MHz, $V_{CC}=5\text{V}, Q=\text{open}$	-	5	mA
		$C=0.1 V_{CC}/0.9 V_{CC}$ at 10 MHz, $V_{CC}=5.5\text{V}, Q=\text{open}$	-	$5^{(2)}$	mA
$I_{CCO}^{(3)}$	Supply current (Write)	During $t_w, S=V_{CC}$,	-	5	mA



Table 13. DC characteristics (Continued)

Symbol	Parameter	Test conditions	Min	Max	Unit
I_{CC1}	Supply current(Standby Power mode)	$S=V_{CC}, V_{IN}=V_{SS}$ or $V_{CC}, V_{CC}=1.8V^{(1)}$	-	3	μA
		$S=V_{CC}, V_{IN}=V_{SS}$ or $V_{CC}, V_{CC}=1.8V^{(1)}$, temp=25°C(or less)		1	μA
		$S=V_{CC}, V_{IN}=V_{SS}$ or $V_{CC}, V_{CC}=2.5V$		3	μA
		$S=V_{CC}, V_{IN}=V_{SS}$ or $V_{CC}, V_{CC}=2.5V$, temp=25°C(or less)	-	1	μA
		$S=V_{CC}, V_{IN}=V_{SS}$ or $V_{CC}, V_{CC}=5.5V$	-	5	μA
		$S=V_{CC}, V_{IN}=V_{SS}$ or $V_{CC}, V_{CC}=5.5V$, temp=25°C(or less)	-	1.5	μA
V_{IL}	Input low voltage	$1.8V^{(1)} \leq V_{CC} < 2.5V$	-0.45	$0.25V_{CC}$	V
		$2.5V \leq V_{CC} \leq 5.5V$	-0.45	$0.3 V_{CC}$	
V_{IH}	Input high voltage	$1.8V^{(1)} \leq V_{CC} < 2.5V$	$0.75V_{CC}$	$V_{CC}+1$	V
		$2.5V \leq V_{CC} \leq 5.5V$	$0.7 V_{CC}$	$V_{CC}+1$	
V_{OL}	Output low voltage	$I_{OL}=0.15mA, V_{CC}=1.8V^{(1)}$	-	0.3	V
		$V_{CC}=2.5V, I_{OL}=1.5mA$ or $V_{CC}=5V, I_{OL}=2 mA$	-	0.4	V
V_{OH}	Output high voltage	$I_{OH}=-0.1 mA, V_{CC}=1.8V^{(1)}$	$0.8V_{CC}$	-	V
		$V_{CC}=2.5V, I_{OH}=-0.4 mA$ or $V_{CC}=5V, I_{OH}=-2 mA$			

1. Or $V_{CC} = 1.7 V$ for the M95M01-DF.
2. For devices identified by process letter K.
3. Characterized value, not tested in production.



Table 14. AC characteristics

Symbol	Alt.	Parameter	Vcc≥1.7V ⁽¹⁾		Vcc≥1.8V ⁽²⁾		Vcc≥2.5V ⁽³⁾		Vcc≥4.5V ⁽⁴⁾		Unit
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
f _c	f _{SCK}	Clock frequency	DC	2	DC	5	DC	10	DC	16	MHz
t _{SLCH}	t _{css1}	S active setup time	150	-	60	-	30	-	20	-	ns
t _{SHCH}	t _{css2}	S not active setup time	150	-	60	-	30	-	20	-	ns
t _{SHSL}	t _{cs}	S Deselect time	200	-	60	-	40	-	25	-	ns
t _{CHSH}	t _{CSH}	S active hold time	150	-	60	-	30	-	20	-	ns
t _{CHSL}		Snot active hold time	150	-	60	-	30	-	20	-	ns
t _{CH} ⁽⁴⁾	t _{CLH}	Clock high time	200	-	90	-	40	-	25	-	ns
t _{CL} ⁽⁴⁾	t _{CLL}	Clock low time	200	-	90	-	40	-	25	-	ns
t _{CLCH} ⁽⁵⁾	t _{RC}	Clock rise time	-	2	-	2	-	-	-	2	μs
t _{CHCL} ⁽⁵⁾	t _{FC}	Clock fall time	-	2	-	2	-	-	-	2	μs
t _{DVCH}	t _{DSU}	Data in setup time	50	-	20	-	10	-	10	-	ns
t _{CHDX}	t _{DH}	Data in hold time	50	-	20	-	10	-	10	-	ns
t _{HHCH}	-	Clock low hold time after HOLD not active	150	-	60	-	30	-	25	-	ns
t _{HLCH}	-	Clock low hold time after HOLD active	150	-	60	-	30	-	20	-	ns
t _{CLHL}	-	Clock low set-up time before HOLD active	0	-	0	-	0	-	0	-	ns
t _{CLHH}	-	Clock low set-up time before HOLD not active	0	-	0	-	0	-	0	-	ns
t _{SHQZ} ⁽⁵⁾	t _{DIS}	Output disable time	-	200	-	80		40	-	25	ns
t _{CLQV}	t _v	Clock low to output valid	-	200	-	80	-	40	-	25	ns
t _{CLQX}	t _{HO}	Output hold time	0	-	0	-	0	-	0	-	ns
t _{QLQH} ⁽⁵⁾	t _{RO}	Output rise time	-	200	-	80	-	40	-	25	ns
t _{QHQL} ⁽⁵⁾	t _{FO}	Output fall time	-	200	-	80	-	40	-	25	ns
t _{HHQV}	t _{LZ}	HOLD high to output valid	-	200	-	80	-	40	-	25	ns
t _{HLQZ} ⁽⁵⁾	t _{HZ}	HOLD low to output high-Z		200	-	80	-	40	-	25	ns
t _w	t _{wc}	Write time	-	5	-	5	-	5	-	5	ms



1. For devices identified by process letter K.
2. Previous products (identified with process letter A) were specified with $f_c(\max) = 2 \text{ MHz}$, with the same AC values as defined in the 1.7 V columns in this table.
3. Previous products (identified with process letter A) were specified with $f_c(\max) = 5 \text{ MHz}$, with the same AC values as defined in the 1.8 V columns in this table.
4. $t_{CH} + t_{CL}$ must never be less than the shortest possible clock period, $1 / f_c(\max)$
5. Value guaranteed by characterization, not 100% tested in production.

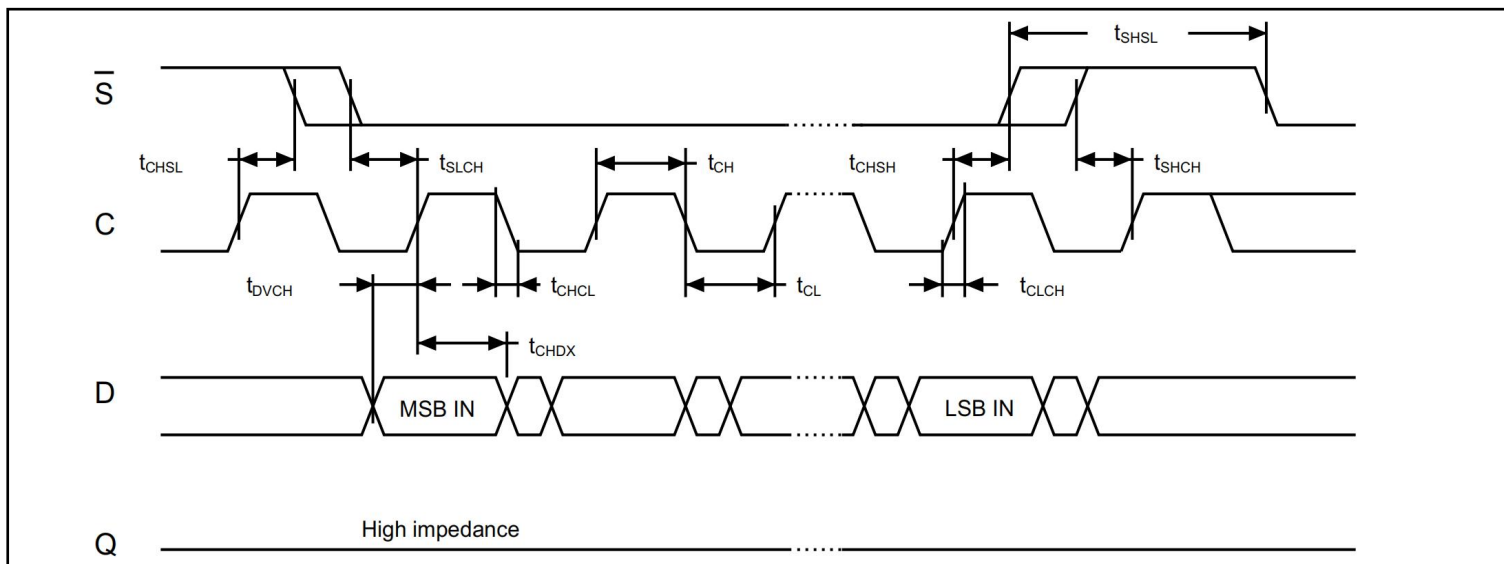


Figure 19. Serial input timing

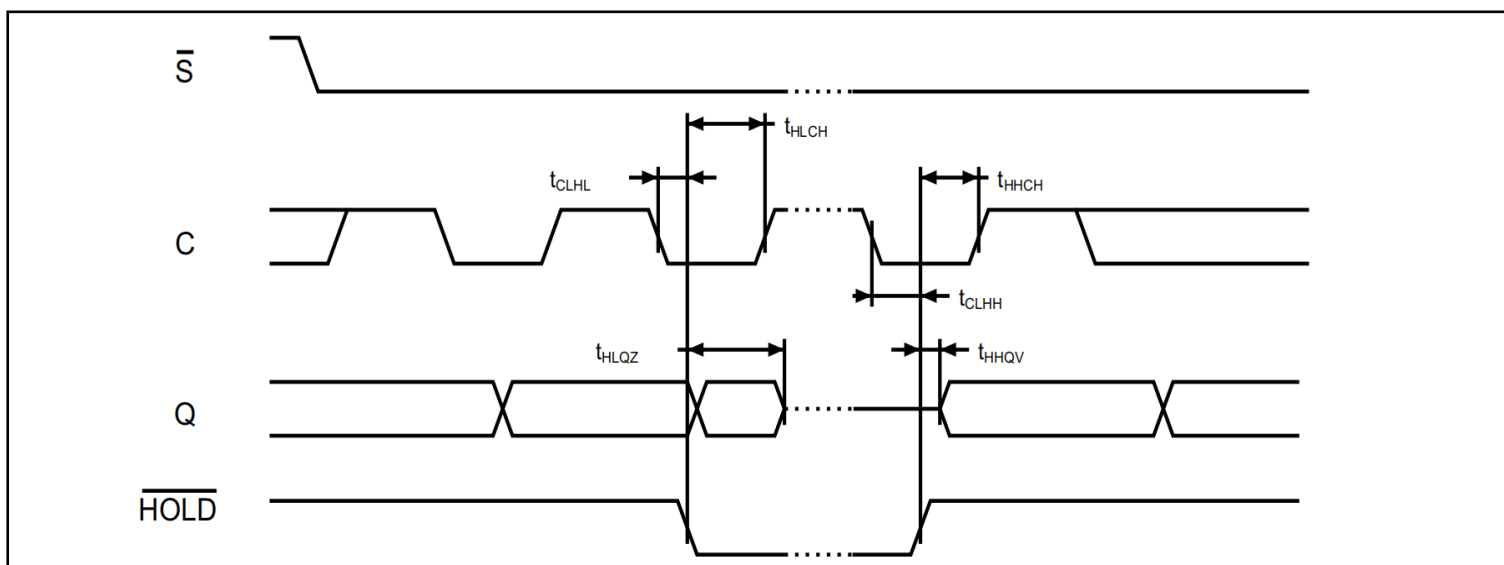


Figure 20. Hold timing

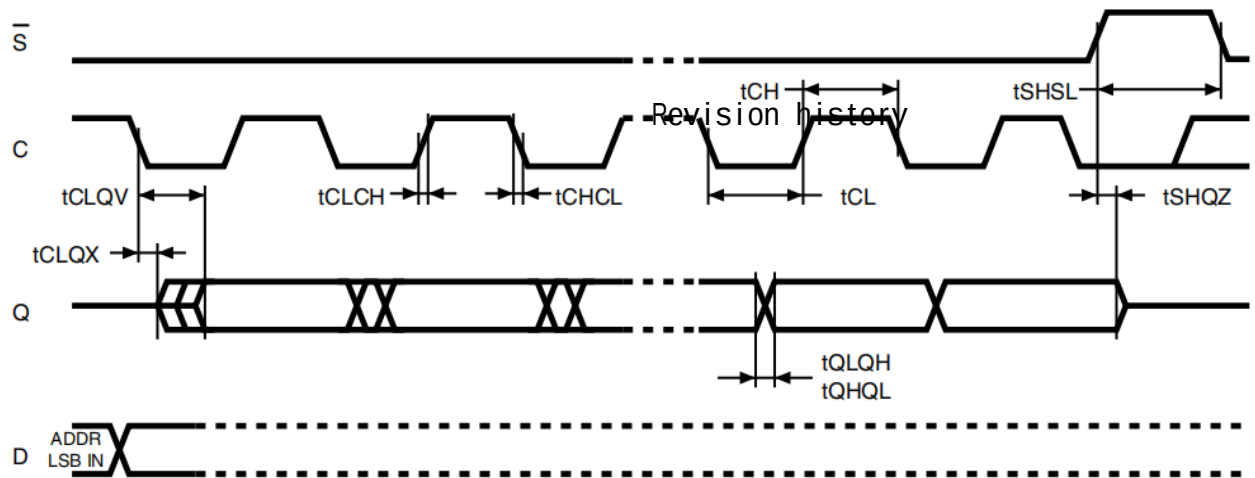


Figure 21. Serial output timing



Order information



Order Number	Package	Package Quantity	Marking On The park	Temperature
M95M01-RMN6TP-TUDI	SOP8	Tape,Reel,4000	95M01R	-40 °C +85 °C
			95N01RP	

Revision history


	Date	Revision	Page
V1.0	2021/3	New	1-16
V1.1	2025/7	Update model and PDF template	1-30



Package SOP8

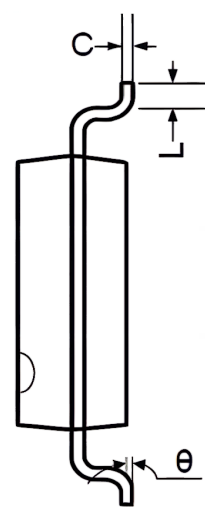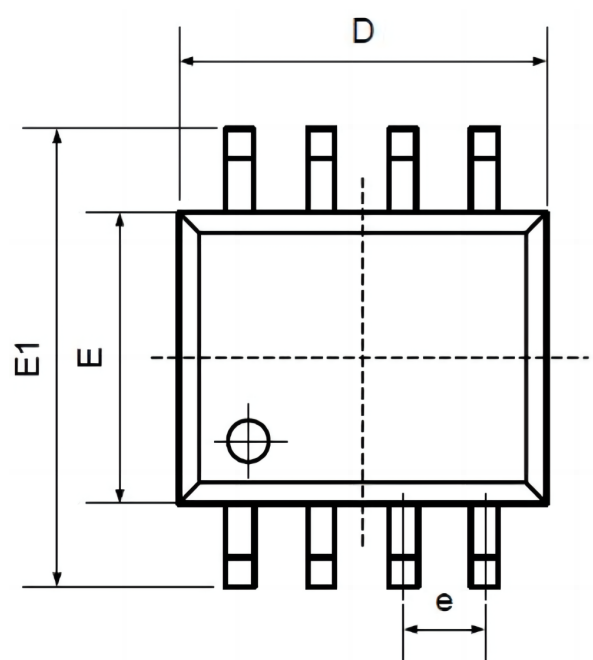

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
B	0.330	0.510	0.013	0.020
C	0.190	0.250	0.007	0.010
D	4.780	5.000	0.188	0.197
E	3.800	4.000	0.150	0.157
E1	5.800	6.300	0.228	0.248
e	1.270TYP		0.050TYP	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

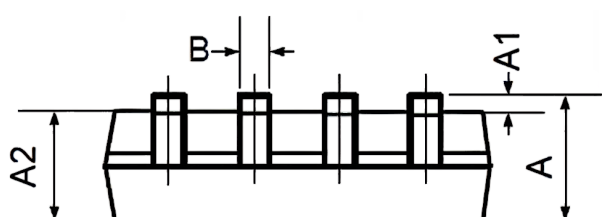



Important statement:

- TUDI Semiconductor reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.
- Any semi-guide product is subject to failure or malfunction under specified conditions. It is the buyer's responsibility to comply with safety standards when using TUDI Semiconductor products for system design and whole machine manufacturing. And take the appropriate safety measures to avoid the potential in the risk of loss of personal injury or loss of property situation!
- TUDI Semiconductor products have not been licensed for life support, military, and aerospace applications, and therefore TUDI Semiconductor is not responsible for any consequences arising from the use of this product in these areas.
- If any or all TUDI Semiconductor products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.
- The specifications of any and all TUDI Semiconductor products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.
- TUDI Semiconductor documentation is only allowed to be copied without any alteration of the content and with the relevant authorization. TUDI Semiconductor assumes no responsibility or liability for altered documents.
- TUDI Semiconductor is committed to becoming the preferred semiconductor brand for customers, and TUDI Semiconductor will strive to provide customers with better performance and better quality products.