



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

a.HOUSING:ABS BLACK

b.SPRING:SPRING WIRE

(SURFACE PLATING: Ni-PLATING)

SEE ORDERING INFORMATION






2.ELECTRIC:

a.DIELECTRIC VOLTAGE: 270V AC ONE MINUTE

b.OPERATING TEMPERATURE: -10° C~ +80° C

ORDERING INFORMATION

BH-AAA-B5BJ028-XXX

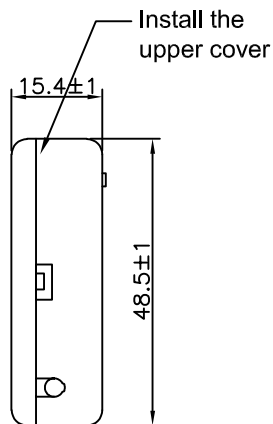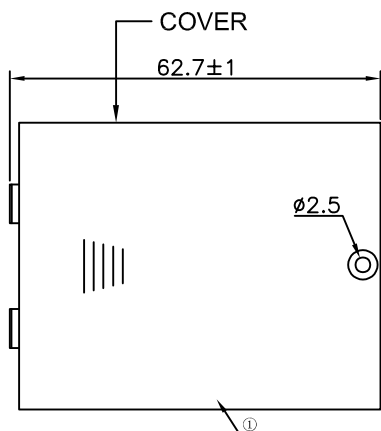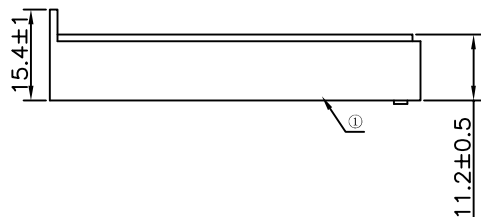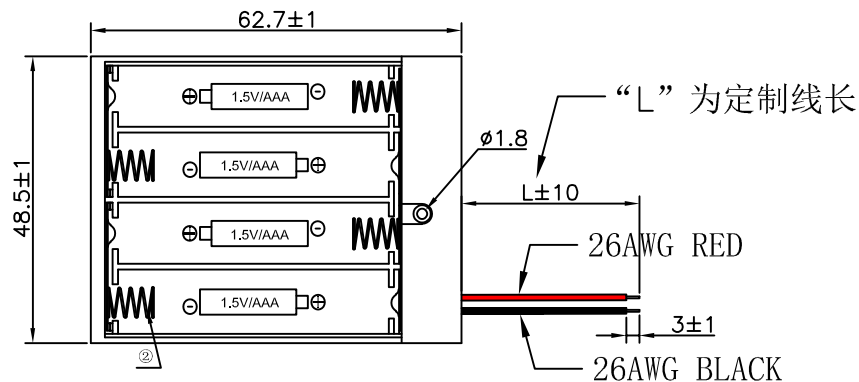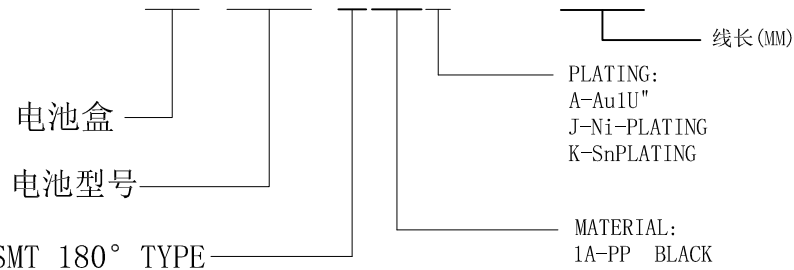

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美阳 www.meiyangdz.com	
DECIMALS: X :±0.30 X.X :±0.25 X.XX :±0.20 X.XXX :±0.10	ANGLES: X :±1° X.X :±0.5°	DSND WangHeng	DATE 2022-04-27
WEIGHT:		CHKD ZhouRuicai	DATE 2022-04-27
SHEET 1 OF 1		APVD XueShunYong	DATE 2022-04-27
SCALE:		SIZE: A4	VIEW:
UNIT: mm		REV.: A/0	OBJECT: MY
TITLE: 电池盒BH-AAA-4J带盖开关 (26#定制线长)		PART NO.: BH-AAA-B5BJ028-XXX	
DRAW NO.:WD-CP-0252			

2	SPRING	4	SPRING WIRE	Ni-Plating
1	HOUSING	2	ABS	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR