



特性:


- 全范围交流输入 90~264VAC
- 保护种类: 短路/ 过负载 / 过电压 / 过温度
- 安装导轨: TS-35/7.5 或 15
- 超窄宽度 30mm
- 内置恒流限制, 启动能力强
- 100% 满载老化测试
- 电源启动LED指示灯
- 高可靠性
- 3 年保修
- 符合 IEC/EN/UL 62368-1, EN61558-1/-2-16

电气规格

型号		ADR-150-12	ADR-150-15	ADR-150-24	ADR-150-36	ADR-150-48
输入	电压范围	90~264VAC 127~370VDC(参考‘静态特性曲线’)				
	频率范围	47~63Hz				
	效率(典型值)	87%	87%	89%	90%	91%
	交流电流(典型值)	2.8A/115VAC 1.6A/230VAC				
	浪涌电流(典型值)	30A/115VAC 55A/230VAC (冷启动)				
	漏电流	<1mA/240VAC				
输出	直流电压	12V	15V	24V	36V	48V
	额定电流	11.2A	9A	6.3A	4.2A	3.2A
	电流范围	0~11.2A	0~9A	0~6.3A	0~4.2A	0~3.2A
	额定功率	134.4W	135W	151.2W	151.2W	153.6W
	纹波与噪声(最大值)	100mVp-p	100mVp-p	120mVp-p	120mVp-p	150mVp-p
	电压调整范围	12~14V	15~17.5V	24~28V	36~42V	48~55V
	电压精度	±1.5%	±1.5%	±1%	±1%	±1%
	线性调整率	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	负载调整率	±1.5%	±1.5%	±1%	±1%	±1%
	启动, 上升 时间	500ms,50ms/230VAC 500ms,50ms/115VAC				
	保持时间(典型值)	30ms/230VAC 7ms/115VAC				
保护	过负载	105%~135% 额定输出功率 保护模式:恒流限制(输出电压>50%Vo), 输出小于5V时, 恒流值变大, 异常条件移除后自恢复				
	过电压	15~18V	19~23V	29~33V	43~47V	56~65V
	过温度	保护模式: 关机, 重启后恢复				
	过温度	保护模式: 关机, 重启后恢复; 自动恢复可定制				
环境	工作温度、湿度	-20~+70°C (参考‘减额曲线’), 20~90%RH 无冷凝				
	储存温度、湿度	-40~+85°C, 10~95%RH				
	温度系数	±0.03%/°C (0~50°C)				
	耐振动	10~500Hz, 2G 10min./1 cycle, each along X、Y、Z axes				

安规和电磁兼容	安全规范	参考 UL62368-1,TUV EN62368-1,CCC GB4943.1, EN61558-1,EN61558-2-16			
	耐压和绝缘阻抗	I/P-O/P: 4.2KVac; 100MΩ / 500Vdc / 25°C / 70%RH			
		I/P-FG: 2.1KVac; 100MΩ / 500Vdc / 25°C / 70%RH			
		O/P-FG: 0.5KVac; 100MΩ / 500Vdc / 25°C / 70%RH			
	电磁兼容发射	Parameter	Standard	Test Level / Note	
		Conducted emission	BS EN/EN55032(CISPR32),FCC PART 15 / CISPR22 ,GB9254.1	Class B	
		Radiated emission	BS EN/EN55032(CISPR32),FCC PART 15 / CISPR22 ,GB9254.1	Class B	
		Harmonic current	BS EN/EN61000-3-2,GB17625.1	Class A(≤80%load)	
		Voltage flicker	BS EN/EN61000-3-3	----	
	电磁兼容抗扰度	BS EN/EN55035			
		Parameter	Standard	Test Level /Note	
		ESD	BS EN/EN61000-4-2	Level 4, 8KV air, Level 2, 4KV contact, criteria A	
		RF field susceptibility	BS EN/EN61000-4-3	Level 3, criteria A	
EFT bursts		BS EN/EN61000-4-4	Level 3, criteria A		
Surge susceptibility		BS EN/EN61000-4-5	Level 4, 2KV/L-N, 4KV/L/N-FG criteria A		
Conducted susceptibility		BS EN/EN61000-4-6	Level 3, criteria A		
Magnetic field immunity		BS EN/EN61000-4-8	Level 4, criteria A		
Voltage dips and interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods , >95% interruptions 250 periods			
其他	MTBF	≥400Khrs MIL-HDBK-217F(25°C)			
	尺寸	30*125.1*110mm(W*H*D)			
	包装	0.54Kg; 24pcs/ 14Kg/ 0.83CUFT			
备注	<p>1. 如未特别说明, 所有规格参数均在输入为230VAC、额定负载、25°C 70%RH 环境温度下进行测量。</p> <p>2. 纹波和噪声测量方法: 使用一条12“双绞线, 同时终端要并联0.1uf和47uf的电容, 在20MHZ带宽下进行量测。</p> <p>3. 精度: 包含设定误差、线性调整率和负载调整率。</p> <p>4. 线性调整率测量方法: 在额定负载下, 从低电压到高电压测试。</p> <p>5. 负载调整率测量方法: 从额定负载的0%-100%。</p> <p>6. 启动时间是在冷启动状态下测得, 快速频繁开关机可能会使启动时间增长。</p> <p>7. 当工作海拔高度超过2000米(6500英尺)时, 工作环境温度必须依5°C/1000米下降。</p> <p>8. 电源应视为系统内元件的一部分, 所有的EMC测试都将测试样品安装在一个厚度1mm, 长360mm*宽360mm的金属铁板上测试。 电源需结合终端设备进行电磁兼容相关确认。</p> <p>9. 安装间隙: 当用于满载时, 建议在顶部预留40毫米, 在底部预留20毫米, 在左侧和右侧预留5毫米, 如果相邻装置是热源, 建议间隙为15毫米。</p>				

机构尺寸

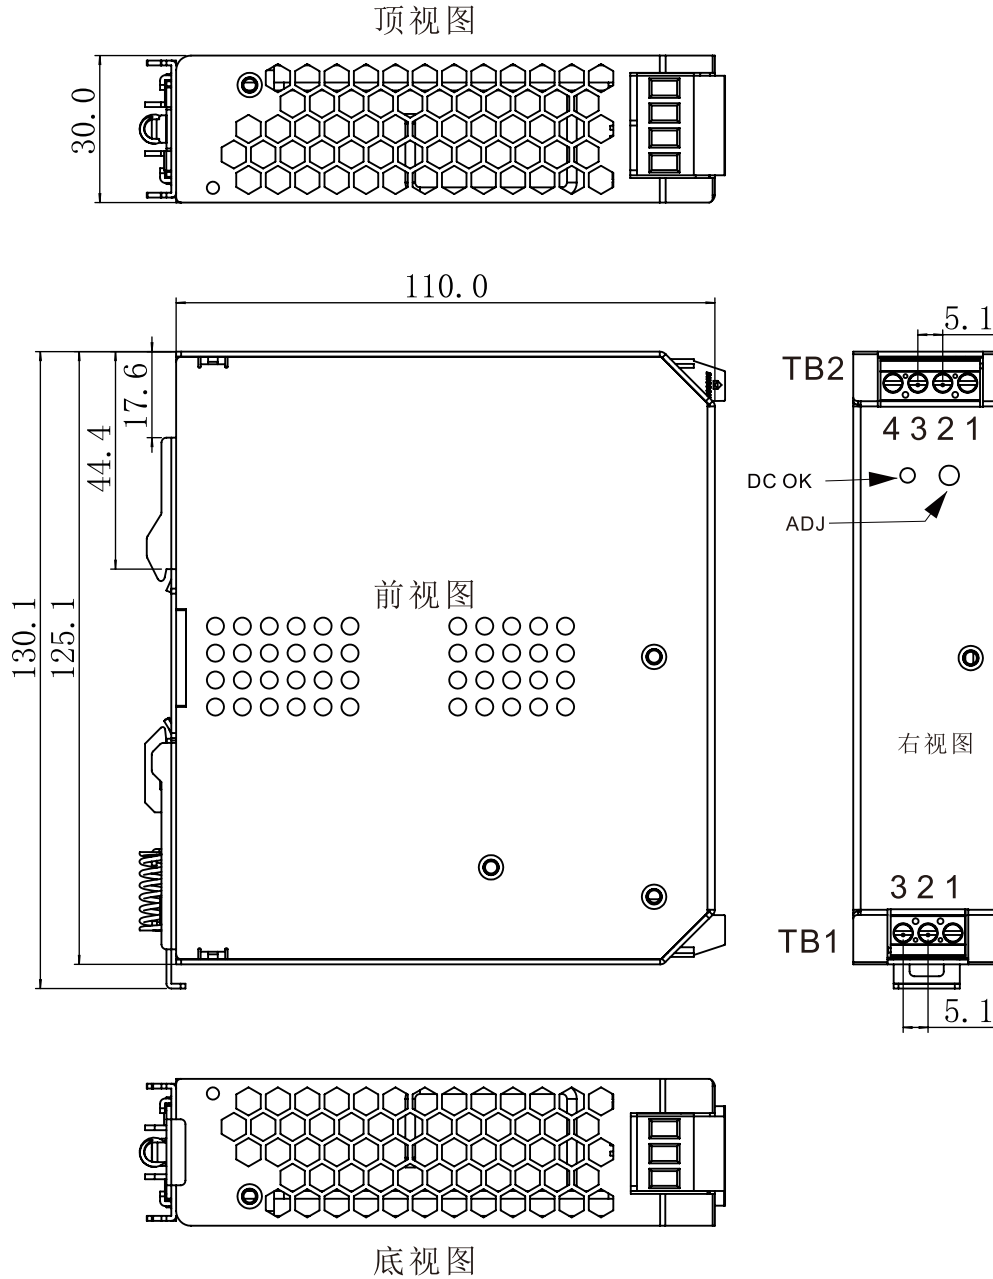

备注:
单位: mm
ADJ:输出可调电阻
公差: ±1.00

安装导轨: TS35/7.5 或 TS35/15

端子台脚位定义

TB1		TB2	
引脚编号	引脚功能	引脚编号	引脚功能
1	AC/L	1,2	DC output -V
2	AC/N	3,4	DC output +V
3	FG		

方框图

