
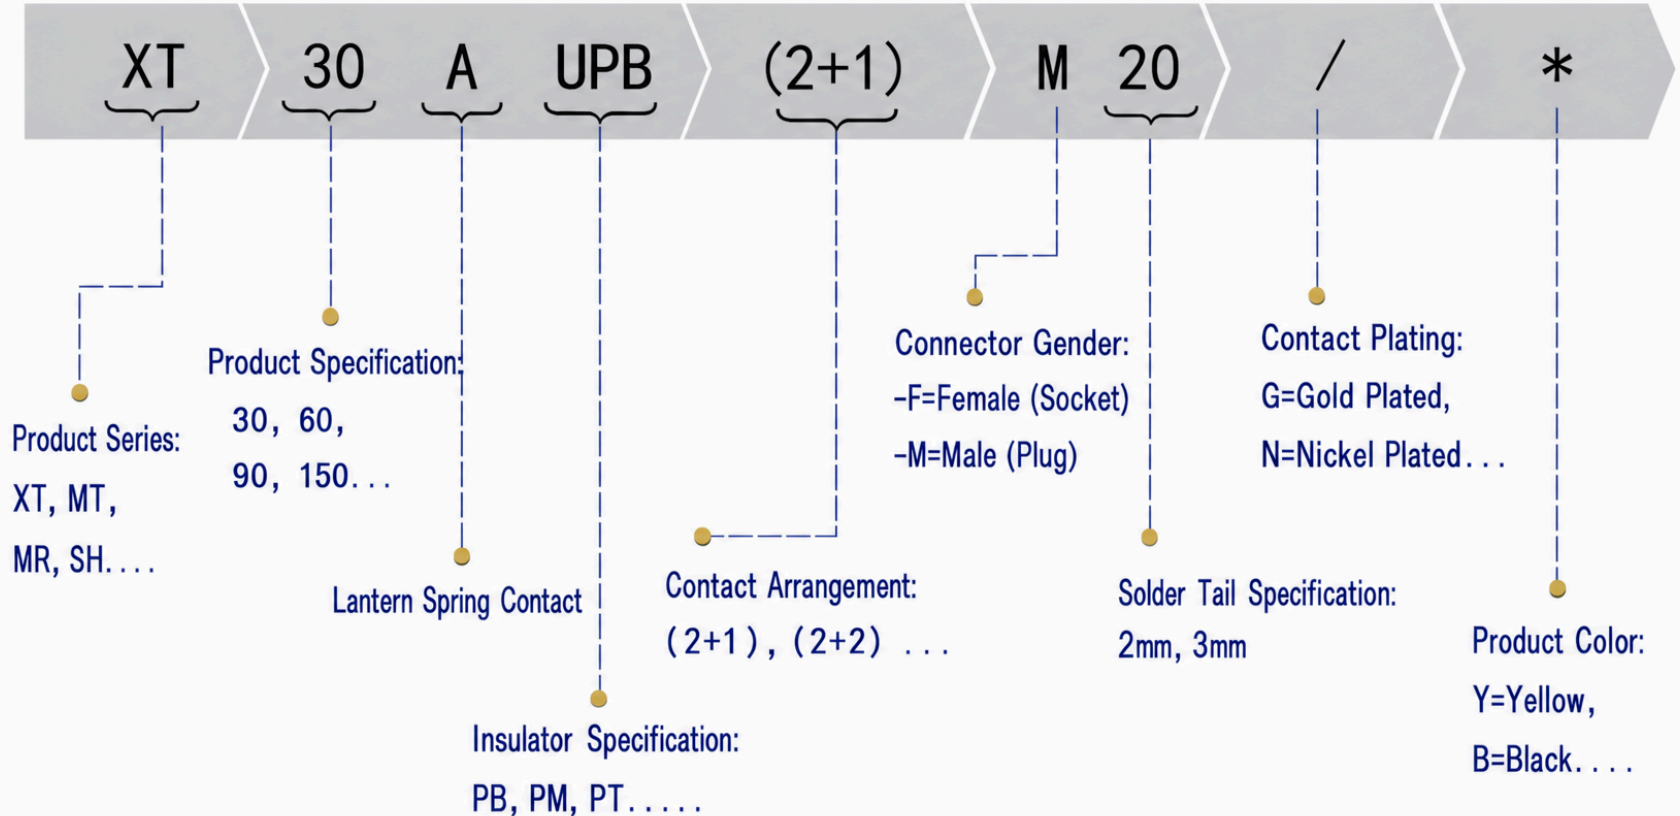


Model Description of Amass Products

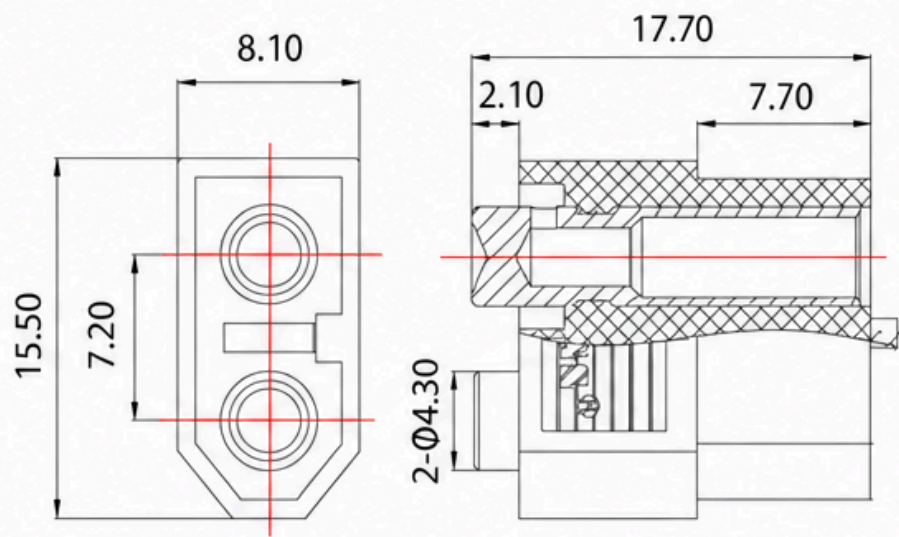

Item No. XT60PW-F		Material & Parameter			
		Item No.	XT60PW-F	Contact Resistance	0.50mΩ
		Color	3	Rated Voltage	DC 500V
		Metal Material	Brass Gold Plated	Rated Current	30A
Patent No. 201530511914.X		Plastic Material	PA	Instantaneous Current	60A
Drawing 		Flame Rating	UL94 V0	Recommended Use Times	1000 TIMES
		Recommended Use	BATTERY	Recommended Cable Spec.	PCB
		Certification	CE/UL	Operating Temperature	-20°C to 120°C