

1

2

3

PART NO. AND CH. CODE	Δ W ₁ ±0.4	Δ H ₁	Δ H ₂	X	A	B	WIRE SIZE
Δ 7116-4025.0	2.30	(2.19)	(4.21)	0.50	12.50	3.00	AVS 0.3~AVS 0.5 EQUIVALENT
Δ 7116-4026.0	3.00	(2.91)	(4.08)	0.80	12.50	3.00	AVS 0.5~AVS 1.25 EQUIVALENT
Δ 7116-4027.0	4.20	(4.06)	(5.09)	1.00	13.00	2.00	AVSS 2 EQUIVALENT


注記

- Δ 1. () 内品番は、エアバック回路及び
特別管理回路に使用する時に適用すること。
- Δ 2. 適用ゴム製品番： 7158-3006-90 ETC.
- Δ 3. 嵌合スターミナル： 7114-4025 ETC. (7B14-4025 ETC.)

NOTES


- Δ 1. PART NUMBERS IN PARENTHESIS SHALL BE USED FOR
AIR BAG (A/B) CIRCUITS AND OTHER CIRCUITS
DESIGNATED FOR SPECIAL MONITORING.
- Δ 2. APPLICABLE RUBBER STOPPER NO. : 7158-3006-90 ETC.
- Δ 3. MATING MALE TERMINAL : 7114-4025 ETC. (7B14-4025 ETC.)

C Δ

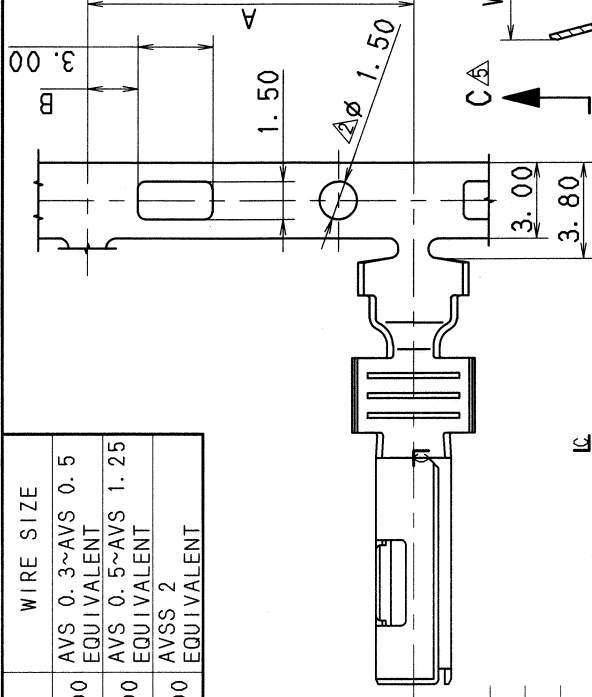


A Δ B Δ


17.00

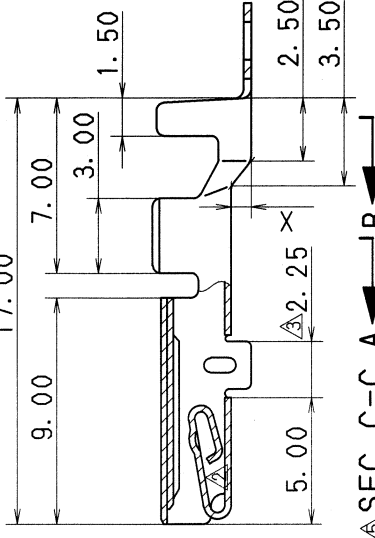

SEC. A-A



SEC. B-B



Δ SEC. C-C

LET	DATE	REVISION RECORD	NO.	CHKD	Y. S	T. M	S. S	H. K	Y. S	T. O
Δ	05/11/10	CHANGED PART NAME ETC.	C05-ZF20							
Δ	00/11/08	CHANGED FORM & DIMENSION	C00-M342							
Δ	98/07/14	ADDED DIMENSION	C97-N456							
Δ	97/05/26	CHANGED FORM & ADDED A/B PART NO.	C97-L981							
Δ	96/01/09	CHANGED DIMENSION	C95-M905							
Δ	88/07/18	NEW	8MC-0809							
LET	DATE	REVISION RECORD	NO.	CHKD	Y. S	T. M	S. S	H. K	Y. S	T. O
GENERAL TOLERANCE										
10MAX 50MAX 100MAX 250MAX 2500VR ANGLE ECCENT										
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1			
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1			
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15			
SPECIFIED										
MASS										
g										

CUSTOMER	CUSTOMER PART NO.	CUSTOMER DWG NO.	MATL. COPPER ALLOY SPEC. (t=0.25)	TREAT. TIN PLATING	ISSUE MARK
OFFICE	TRIAL PART NO.		NAME Δ 2.3 II SEALED TERMINAL		
VENDOR			FEMALE		
VENDOR NO.					
DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	88/07/12	m	5:1	3
APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	
小島	田口	星	M. TSUJI	O. DAR	
05.11.25	05.11.24	05.12.23	87/08/26	05/11/10	
PART NO. 7116-4025 ETC. (7B16-4025 ETC.) Δ					
CH. CODE					
DWG NO. 7116-4025:R					
SET DWG NO.					
YAZAKI CORPORATION					

1

2

3