



General Description

The MAX485ESA is low-power transceivers for RS-485 and RS-422 communication. IC contains one driver and one receiver. The driver slew rates of the MAX485 is not limited, allowing them to transmit up to 2.5Mbps.

These transceivers draw between 120µA and 500µA of supply current when unloaded or fully loaded with disabled drivers. All parts operate from a single 5V supply. Drivers are short-circuit current limited and are protected against excessive power dissipation by thermal shutdown circuitry that places the driver outputs into a high-impedance state. The receiver input has a fail-safe feature that guarantees a logic-high output if the input is open circuit. The MAX485 is designed for half-duplex applications.



N SUFFIX
PLASTIC



D SUFFIX
SOIC

Features

Low Quiescent Current: 300µA

-7V to +12V Common-Mode Input Voltage Range

Three-State Outputs

30ns Propagation Delays, 5ns Skew

Full-Duplex and Half-Duplex Versions Available


Operate from a Single 5V Supply

Allows up to 32 Transceivers on the Bus

Data rate: 2,5 Mbps

Current-Limiting and Thermal Shutdown for Driver Overload Protection

Pinning

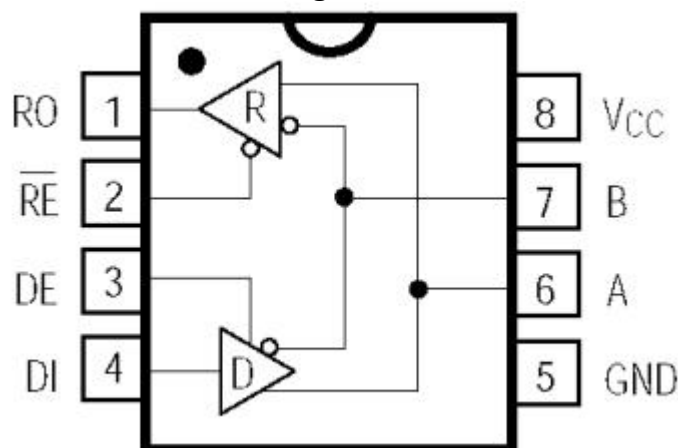

ABSOLUTE MAXIMUM RATINGS

Supply Voltage (VCC) 12V
Control Input Voltage -0.5V to (VCC + 0.5V)

Continuous Power Dissipation (TA= +70°C)

Driver Input Voltage (DI) -0.5V to (VCC+ 0.5V)

8-Pin SO (derate 5.88mW/°C above +70°C)
471mW

Driver Output Voltage (A, B) -8V to +12.5V

Operating Temperature Ranges 0°C to +70°C

Receiver Input Voltage (A, B) -8V to +12.5V

Storage Temperature Range -65°C to +160°C

Receiver Output Voltage (RO) -0.5V to (VCC+0.5V)

Lead Temperature (soldering, 10sec) +300°C

DC ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Differential Driver Output (no load)	V _{OD1}				5	V
Differential Driver Output (with load)	V _{OD2}	R = 50 Ω (RS-422)	2			V
		R = 27 Ω (RS-485), Figure 4	1.5		5	
Change in Magnitude of Driver Differential Output Voltage for Complementary Output States	ΔV _{OD}	R = 27 Ω or 50 Ω, Figure 4			0.2	V
Driver Common-Mode Output Voltage	V _{OC}	R = 27 Ω or 50 Ω, Figure 4			3	V
Change in Magnitude of Driver Common-Mode Output Voltage for Complementary Output States	ΔV _{OD}	R = 27 Ω or 50 Ω, Figure 4			0.2	V
Input High Voltage	V _{IH}	DE, DI, RE	2.0			V
Input Low Voltage	V _{IL}	DE, DI, RE			0.8	V
Input Current	I _{IN1}	DE, DI, RE			±2	μA
Input Current (A, B)	I _{IN2}	DE = 0V; V _{CC} = 0V or 5.25V,	V _{IN} = 12V		1.0	mA
			V _{IN} = -7V		-0.8	
Receiver Differential Threshold Voltage	V _{TH}	-7V ≤ V _{CM} ≤ 12V	-0.2		0.2	V
Receiver Input Hysteresis	ΔV _{TH}	V _{CM} = 0V		70		mV
Receiver Output High Voltage	V _{OH}	I _O = -4mA, VID = 200mV	3.5			V
Receiver Output Low Voltage	V _{OL}	I _O = 4mA, VID = -200mV			0.4	V
Three-State (high impedance) Output Current at Receiver	I _{OZR}	0.4V ≤ V _O ≤ 2.4V			±1	μA
Receiver Input Resistance	R _{IN}	-7V ≤ V _{CM} ≤ 12V	12			k Ω

(V_{CC} = 5V ±5%, T_A = T_{MIN} to T_{MAX}, unless otherwise noted.) (Notes 1, 2)

DC ELECTRICAL CHARACTERISTICS (continued)

 ($V_{CC} = 5V \pm 5\%$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.) (Notes 1, 2)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
No-Load Supply Current (Note 3)	I_{CC}	DE = VCC		500	900	
		RE = 0V or V _{CC} DE = 0V		300	500	μA
Driver Short-Circuit Current, V _O = High	I_{OSD1}	-7V ≤ V _O ≤ 12V (Note 4)	35		250	mA
Driver Short-Circuit Current, V _O = Low	I_{OSD2}	-7V ≤ V _O ≤ 12V (Note 4)	35		250	mA
Receiver Short-Circuit Current	I_{OSR}	0V ≤ V _O ≤ V _{CC}	7		95	mA

SWITCHING CHARACTERISTICS

 ($V_{CC} = 5V \pm 5\%$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.) (Notes 1, 2)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Driver Input to Output	t_{PLH}	R _{DIFF} = 54 Ω ,	10	30	60	ns
	t_{PHL}	C _{L1} = C _{L2} = 100pF	10	30	60	
Driver Output Skew to Output	t_{SKEW}	R _{DIFF} = 54 Ω , CL1 = CL2 = 100pF		5	10	ns
Driver Enable to Output High	t_{ZH}	C _L = 100pF, S2 closed		40	70	ns
Driver Enable to Output Low	t_{ZL}	C _L = 100pF, S1 closed		40	70	ns
Driver Disable Time from Low	t_{LZ}	C _L = 15pF, S1 closed		40	70	ns
Driver Disable Time from High	t_{HZ}	C _L = 15pF, S2 closed		40	70	ns
t _{PLH} - t _{PHL} Differential	t_{SKD}	R _{DIFF} = 54 Ω ,		13		ns
Receiver Skew		C _{L1} = C _{L2} = 100pF				
Receiver Enable to Output Low	t_{ZL}	C _{RL} = 15pF, S1 closed		20	50	ns
Receiver Enable to Output High	t_{ZH}	C _{RL} = 15pF, S2 closed		20	50	ns
Receiver Disable Time from Low	t_{LZ}	C _{RL} = 15pF, S1 closed		20	50	ns
Receiver Disable Time from High	t_{HZ}	C _{RL} = 15pF, S2 closed		20	50	ns
Maximum Data Rate	f_{MAX}		2.5			Mbps

Operation timing diagrams of MAX485.

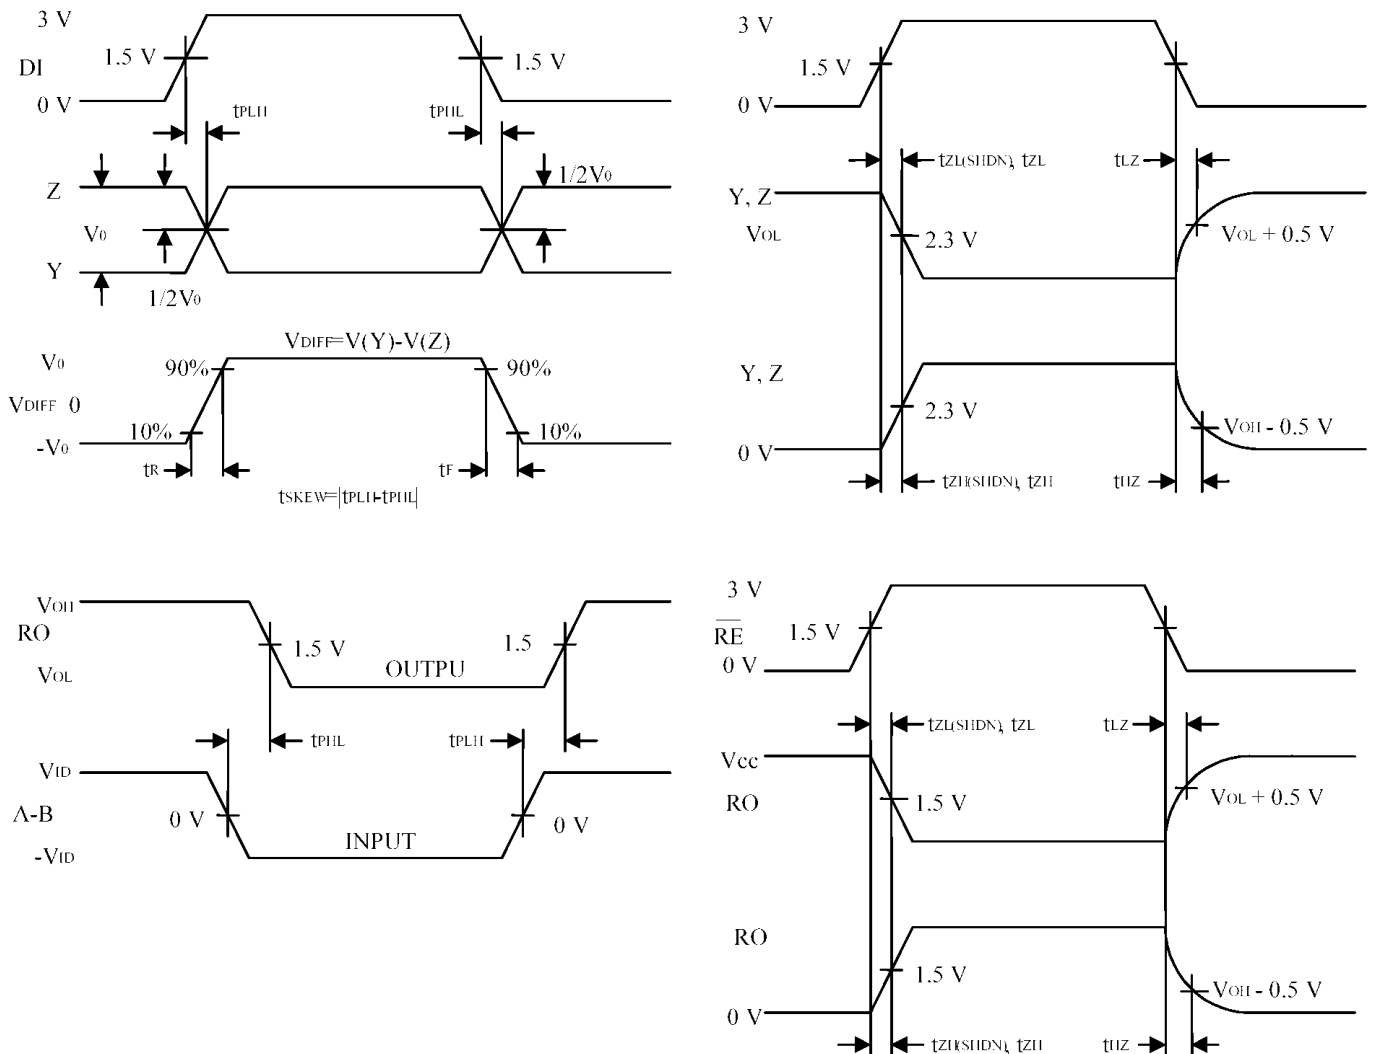


Table of MAX485 operation.


Transmission					Receipt			
Inputs			Outputs		Inputs			Outputs
RE	DE	DI	Z	Y	RE	DE	A-B	RO
X	1	1	0	1	0	0	+0.2V	1
X	1	0	1	0	0	0	-0.2V	0
0	0	X	Z	Z	0	0	open	1
1	0	X	Z	Z	1	0	X	Z

X-don't care

Z-high resistance

PackageDimension

SOP8

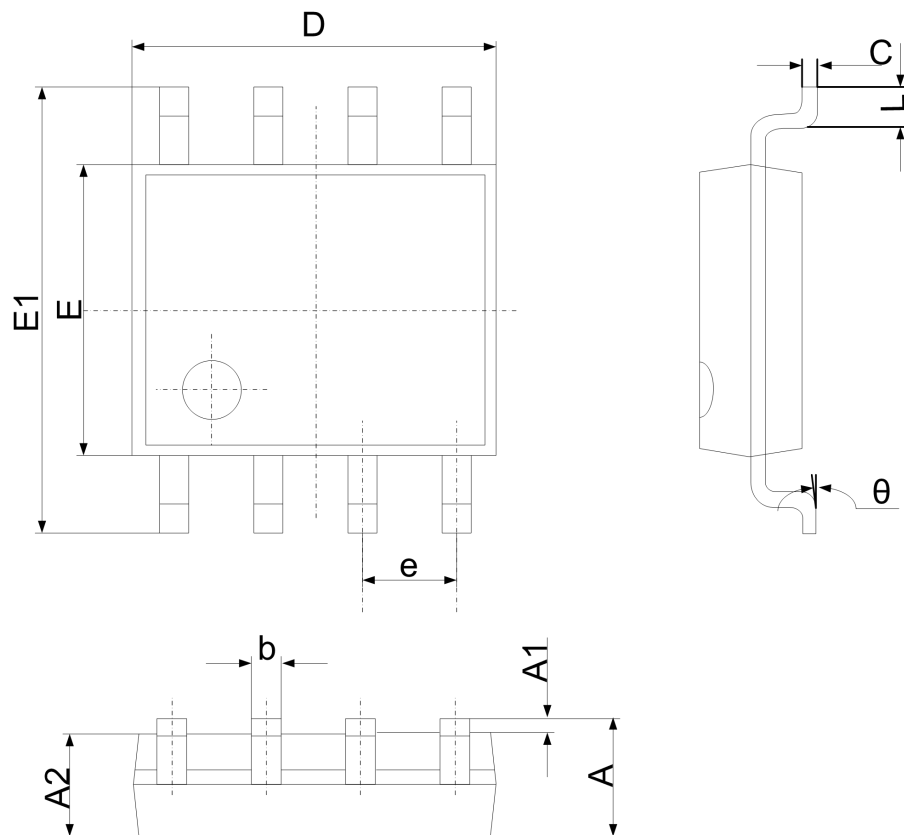

Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270 (BSC)		0.050 (BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

Revision History

Date	Rev	Description	Framer	Review	Approver
2019/11/14	1.0	First Release	Zhou Hui		