


## 20 AMPS SCHOTTKY BARRIER RECTIFIER

TO-277

### Features:

- High current capacity, low forward voltage.
- Excellent high temperature stability.
- Low power loss, high efficiency
- High forward surge capacity.
- RoHS compliant, and Halogen free.

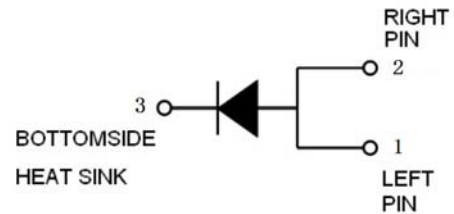

### Absolute Maximum Ratings (Ta=25°C unless otherwise noted)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Recurrent Peak Reverse Voltage	$V_{RRM}$	$I_R=0.5mA$	50	-	-	V
Average Forward Current	$I_{F(AV)}$	$V_R=45V@T_j=25^\circ C$	-	20	-	A
Peak Forward Surge Current, 8.3ms single half sine-wave	$I_{FSM}$	$V_R=45V@T_j=25^\circ C$	-	-	200	A
Forward Voltage(Note1)	$V_F$	$I_F=10A$	-	0.42	-	V
		$I_F=15A$	-	0.45	-	
		$I_F=20A$	-	-	0.55	
Reverse Leakage Current(Note1)	$I_R$	$V_R=45V@T_j=25^\circ C$	-	-	0.20	mA
		$V_R=45V@T_j=100^\circ C$	-	-	20	
Operating Junction Temperature	$T_j$	-	-	-	150	°C
Storage Temperature Range	$T_{stg}$	-	-40	-	150	
Thermal Resistance(Note2)	$R_{th(JA)}$	-	-	31	-	°C/W

Note 1: Pulse test width PW=300usec. 1%duty cycle

Note 2: Polymide PCB, 2oz. copper. Cathode pad dimensions 18.8\*14.4mm. Anode pad dimensions 5.6\*14.1mm

Typical Characteristics

RATING AND CHARACTERISTIC CURVES

FIG. 1- FORWARD CURRENT DERATING CURVE

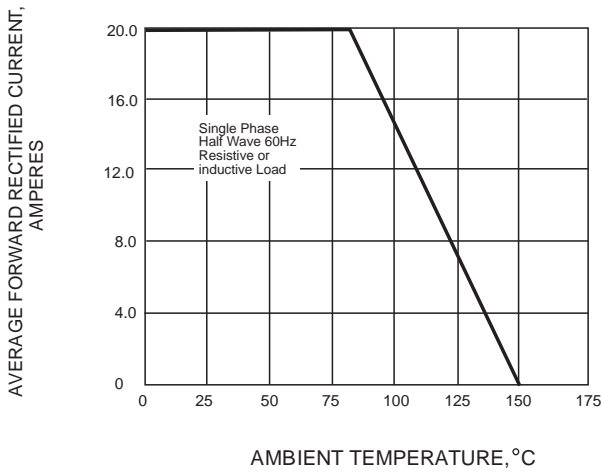


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

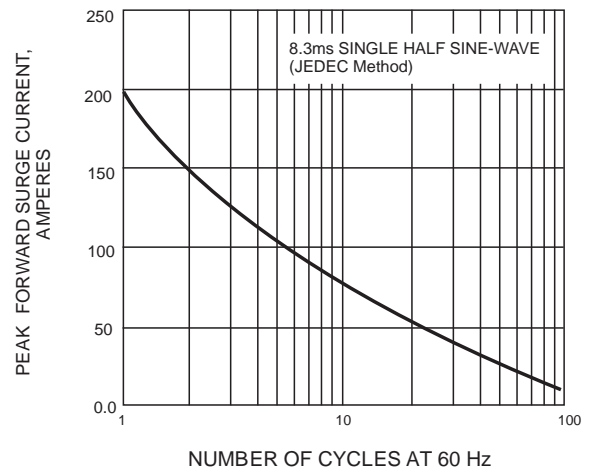


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


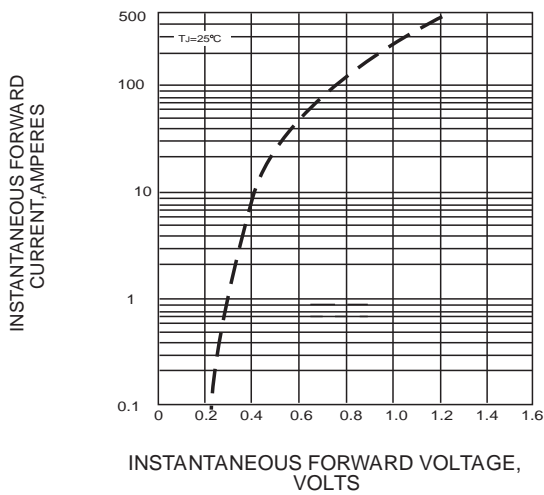


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

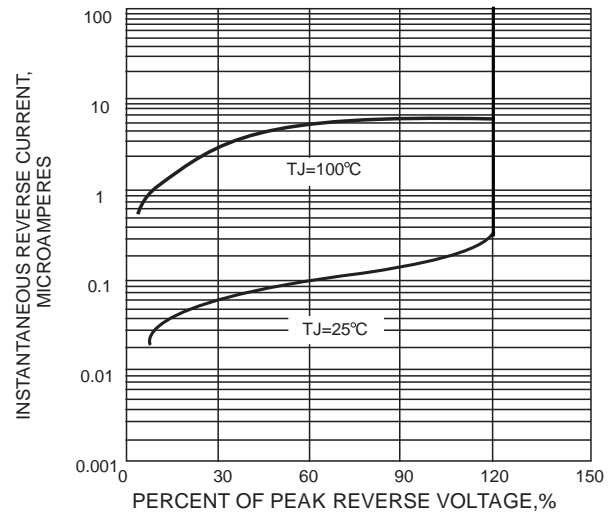

**Package Dimension**

TO-277

Units: mm

