

APPROVAL SHEET

Customer:

Customer Part NO.

Part NO.

CK035M101E7DPC97V00A

Item:

100uF/35V

Catalog Series:

CK Series

Date of Issue:

MAR.25.2026

Approved NO. :

SD20260325001

BUYER'S STAMP	Approved by			

Su'scon	Submitted by			
	Approval	Check	Affirm	Design
				

Su'scon



China – DongGuan Kuan Kun Electronic Co., Ltd.
Tel: 0769-83086886 Fax: 0769-83086886

Electrolytic Capacitor

RECORD OF REVISION					
NO.	VERSION	REASON	DATE	CHECKED	REMARKS
1	A00	First Release	2026.03.25	王代燕	
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					
27					
28					
29					
30					

CK Specification For Approval

NO.	Customer Part No.	Specification	Part No.
1		EC,100uF/35V	CK035M101E7DPC97V00A
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			

Explanation of Parts Numbers (ERP System)

Draw Up:1999.12.15
Revise:2016.06.15

Codification:DKK/III-00-002
Edition:A08

Explanation of Parts Numbers

1	2
C	K

[Series]

3	4	5
0	2	5

[Voltage]



6
M

[Capacitance Tolerance]



7	8	9
2	2	2

[Capacitance Code]



10
X

[Diameter]



11	12
D	B

[Length]



13
P

[Special Remark]

14	15	16
C	9	7

[Customer Code]

17	18	19	20
V	0	0	R/A

[Type Code description]

R=RoHS/Free Halogen

A=Automotive products RoHS/Free Halogen



1) Length < 100mm Integer,Input it direct.
2) Length < 100mm Decimal,Please refer the code as below: Ex:11.5 isBB; 5.4 is 5A;
3. Length ≥ 100mm,First digit input No.0~9 , 2nd 、3rd refer as below Code11 Ex:115,Input B5.

Code 11、18	Meaning
A	10
B	11
C	12
D	13
E	14
F	15
G	16
H	17
I	18
J	19
K	20
Q	21

Code 12、19	Meaning
A	0.4
B	0.5
C	0.6
D	0.7
E	0.8
F	0.9
G	0.1
H	0.2
I	0.3

RADIAL	B=Forming Only C=Lead Cut D=Lead Cut and Crimp N=Lead spacing expand to 2.0 mm then Cut E=Lead spacing expand to 2.5 mm then Cut F=Lead Forming spacing 5.0 mm thenCut H=Lead Forming Cut and Crimp S=Long Lead L=Facing cathode:Lead Cut and Bending (turn right) Z=Facing cathode:Lead Cut and Bending (turn left) P=Taping (Ammo pack) R=Tape and Reel V=V-chip Type (SMD)	<1>Code No.17 is"P","R"Code No.18、19 is stand for Lead pitch.
		<2>Code No.17 is C,N,E,F,D,H,W,K,L,Z, Code No.18、19 is stand for Lead length.
		<3>Code No.17 is S,Code No.18、19 be filled in "00" is stand for General Long Lead
LUG	G= LG Type Terminal PCS= PC board pin-out Straight Terminal PCY= PC board pin-out LUG Terminal PCU= PC board pin-out U-Insert Terminal PCB= PC board pin-out Bend Terminal ST= Straight Type Terminal U= 5 Pin Straight Terminal W= Screw Terminal YL= Snap	<4>Code No.17 is "B",Code No.18、19 be filled in "00" is stand for Forming Long Lead
		<5>Code No.17 is "V",Code No.18、19 be filled in "00" is Fill code number, does not mean other significance

Code 13	Meaning
T	Convex Rubber seal {Standard : Lead Type 12.5Φ ≤ D ≤ 18Φ(Breathe freely)}
P	Flat Rubber seal {Standard : Lead Type 4Φ ≤ D ≤ 12Φ : 20Φ、22Φ、25Φ}
0	Snap-in,U-LUG Type

KKK	For Standard Product which has no artifctitious. (Bulk, Long-lead, No partcular processing, rated spec.)
C97	Customer No.

2.ERP P/N System compare with NCC's Description

(1) "Finished Products" ----20 Codes ,

(2) Snap in Type---- "Semi-finished products P/N" has not demand , It's also 20 Codes

(3) Lead Type---- 16 codes for "Semi-finished products" , It's 16 codes (If Specially enquire and 16 codes can not be reached, It will be 20 code for that)

(4) Codes No.13 : Specially Code , It's difference between clients enquire and same Spec multiple enquired.

(5) Codes No.14~16 which is for clients Code.

(6) Length of Lead Cut and Forming bigger than10.0mm or appendix digit , Letters Description .

FOR APPROVAL

DIMENSIONS(mm)

■ Chip Type

Fig.1 ΦD=4~10mm






Fig.2 ΦD≥12.5mm

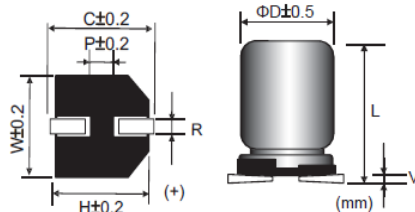

Size	ΦD	L	W	H	C	R	P	Vmax
4*5.4	4.0	5.4±0.3	4.3	4.3	5.1	0.5~0.8	1.0	0.3
5*5.4	5.0	5.4±0.3	5.3	5.3	5.9	0.5~0.8	1.4	0.3
6.3*5.4	6.3	5.4±0.3	6.6	6.6	7.2	0.5~0.8	2.1	0.3
6.3*7.7	6.3	7.7±0.3	6.6	6.6	7.2	0.5~0.8	2.1	0.3
8*10	8.0	10±0.5	8.3	8.3	9.0	0.7~1.1	3.2	0.3
10*10	10.0	10±0.5	10.3	10.3	11.0	0.7~1.3	4.5	0.3
12.5*13.5	12.5	13.5±0.5	13.0	13.0	13.7	1.1~1.4	4.5	0.4

Customer:		Aluminum Electrolytic Capacitors CK Series								Code	
		Electric Characteristics:									
P/N	P/N	Cap. (uF)	Cap. Tol. (%)	Rate Volt. (V-DC)	Surge Volt. (V-DC)	Oper. Temp. (°C)	Nominal Case Size D*L(mm)	Leakage Current Max (uA)	D.F. MAX (%)	R.C 120 Hz (mA rms)	Load Life (Hours)
	CK035M101E7DPC97V00A	100	±20	35	40.3	105	6.3*7.7	35	20	100	2000

REMARKS:

- 1. Leakage Current Test:** 6.3V ~100V for 2 minutes ;
- 2. Operating temperature :** 6.3V~100V -55℃~+105℃;
- 3. Dissipation Factor Test:** at 20℃, 120 Hz.
- 4. Capacitance Test:** at 20℃, 120 Hz.
- 5. Ripple Current Test :** at 105℃, 120 Hz ;
- 6. Load Life:** 2000 hours with application of rated voltage at 105℃.
- Capacitance Change:** Within±20% of initial value;
- tanδ:** 200% or less of initial specified value;
- Leakage Current:** Initial specified value or less;
- 7. Shelf Life:** The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1000 hours 105℃ without voltage applide. Before the measurement, the capacitor shall be preconditioned by applying voltage according to them 4.1 of JIS C5101-4.
- Capacitance Change :** Within±20% of initial value;
- tanδ:** 200% or less of initial specified value;
- Leakage Current:** Initial specified value or less.
- 8. when have characteristic requested:** Load life & shelf life test and etc. , judgment standard reference to our catalogue.
- 9.Remarks:** Su'scon Part Number with suffix code "A" is specially offered for automotive project, which meets AEC-Q200 standard.

●SPECIFICATION

Leakage Current 洩漏電流	After 2 minutes application of rated voltage,leakage current is not more than 0.01cv or 3(uA),whichever is greater.							
Dissipation Factor 散逸因素（損失角） (tan δ)	Measurement Frequency:120Hz. Temperature:20℃							
	Rate Voltage(V)	6.3	10	16	25	35	50	63~100
	tan δ （MAX）	0.32	0.28	0.24	0.18	0.15	0.14	0.12
	When nominal capacitance over 1000μF, tanδ shall be added 0.02 to the listed value with increase of every 1000μF .							
Low Temperature Stability 低溫特性	Measurement Frequency:120Hz.							
	Rate Voltage(V)	6.3	10	16	25	35	50	63~100
Impedance Ratio(MAX)	Z(-25℃)/Z(20℃)	4	3	2	2	2	2	2
阻抗比率(MAX)	Z(-55℃)/Z(20℃)	8	8	4	4	3	3	3
●Frequency coefficient of rated ripple current								
Frequency(HZ)	50	120	300	1k	≥10k			
Coefficient	0.70	1.00	1.17	1.36	1.50			


一. Scope 適用範圍：

This specification applies to aluminium electrolytic capacitor, used in electronic equipment.

本說明對於用電子儀器設備進行檢測之鋁電解電容器適用。


二. TABLE-TABLE OF METHODS REFERENCED ALUMINUM ELECTROLYTIC CAPACITORS表-铝电解电容器参考方法

NO.	Stress应力方式	Reference参考方法	Additional Requirements 附加要求	SPECIFICATION 規格
1	Pre- and Post- Stress Electrical Test 应力测试前后电气测试	User spec.用户规格	Test is performed except as specified in the applicable stress reference and the additional requirements in Table 3.需进行测试，除了适用的应力测试标准和表3中的附加要求指定之外。	In the experimental report 分布在試驗報告中
3	High Temperature Exposure (Storage) 高温存储	MIL-STD-202 Method 108	1000 hrs. at rated operating temperature (e.g. 105°C part can be stored for 1000 hrs at 105°C. Same applies for 85°C & 125°C). Unpowered. Measurement at 24±4 hours after test conclusion. 在额定工作温度下放置器件1000小时（例如：105°C的产品可以105°C下存储1000小时，同样地也适用于85°C和125°C的产品），不通电。试验结束后24±4小时内进行测试。	Capacitance change Tan δ .Rate of change: please have a look at this series of shelf life standard. less than specified value . Appearance : no abnormal . 容量.損失角,的變化標準: 請見該系列的放置壽命說明標準 泄漏電流:低于初期規定值 . 外觀:無異常 .
4	TemperatureCycling 温度循环	JESD22Method JA-104	1000 cycles (-55°C to 105°C) Note: If 85°C or 125°C part the 1000 cycles will be at that temperature rating. Measurement at 24±4 hours after test conclusion. 30min maximum dwell time at each temperature extreme. 1 min. maximum transition time. 1000个循环（-55°C到105°C）。注意：如果85°C或125°C的产品，1000个循环应在其温度等级下进行。试验结束后24±4小时内进行测试。每个温度的停留时间不超过30分钟，转换时间不超过1分钟。	Capacitance change : within ±20% of the initial specified value. Tan δ :200% of initial specified value Leakage current : less than specified value . Appearance : no abnormal . 靜電容量變化:最初規定值的 ±20%以內. 損失角:規定值2倍, 泄漏電流:低于規定值, 外觀: 無異常 .
7	Biased Humidity 高温高湿	MIL-STD-202 Method 103	1000 hours 85°C/85%RH. Rated Voltage. Measurement at 24±4 hours after test conclusion. 在温度85°C，湿度85%的条件下放置1000小时。额定电压。试验结束后24±4小时内进行测试。	Capacitance change : within ±20% of the initial specified value. Tan δ :less than specified value Leakage current : less than specified value . Appearance : no abnormal . 靜電容量變化:最初規定值的 ±20%以內. 損失角:低于規定值, 泄漏電流:低于規定值, 外觀:無異常 .
8	Operational Life 工作寿命	MIL-STD-202 Method 108	Note: 2000 hours; @ 105°C. If 85°C or 125°C part will be tested at that temperature. Rated Voltage applied. Measurement at 24±4 hours after test conclusion. 注意:2000小時@ 105°C。如果85°C或125°C的产品，应在其温度下进行。施加额定的电压。试验结束后24±4小时内进行测试。	Capacitance change Tan δ .Rate of change: please have a look at this series of load life standard. less than specified value . Appearance : no abnormal . 容量.損失角,的變化標準:請見該系列的負荷壽命說明標準 泄漏電流:低于初期規定值 . 外觀:無異常 .
9	External Visual 外观	MIL-STD-883 Method 2009	Inspect device construction, marking and workmanship. Electrical Test not required. 检查器件结构，标识和工艺质量。不要求电气测试。	In the experimental report 分布在試驗報告中
10	Physical Dimension 尺寸	JESD22Method JB-100	Verify physical dimensions to the applicable device detail specification. Note: User(s) and Suppliers spec. Electrical Test not required. 按适用的器件规格验证物理尺寸。注意：用户和供应商规格。不要求电气测试。	Do judgement, according to the specification sheet. 依據規格書判斷

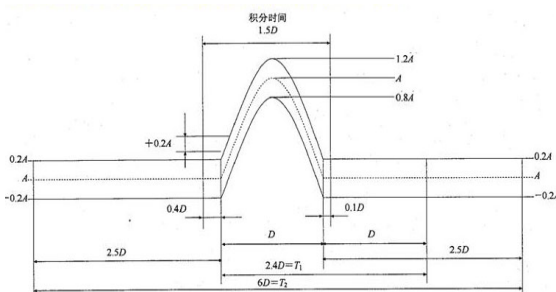NO.	Stress应力方式	Reference参考方法	Additional Requirements 附加要求	SPECIFICATION 規格
12	Resistance to Solvents 溶剂抵抗	MIL-STD-202 Method 215	Note: Also aqueous wash chemical - OKEM clean or equivalent. Do not use banned solvents. 注意: 水洗清洗剂-OKEM清洗剂或其它相同的溶剂。不要使用禁止的溶剂。	Capacitance change : within $\pm$ 5% of the initial specified value. Tan δ :less than specified value .Leakage current : less than specified value .Appearance:Print without loss, appearance without exception 靜電容量變化:最初規定值的 $\pm$ 5%以內. 損失角:低於規定值 . 泄漏電流:低於規定值, 外觀:印刷字體無脫落及外觀無異常
13	Mechanical Shock 機械沖擊	MIL-STD-202Method 213	Figure 1 of Method 213. Condition C 方法213圖表1, 條件C. 	Capacitance change : within $\pm$ 5% of the initial specified value. Tan δ :less than specified value .Leakage current : less than specified value .Appearance : no abnormal . 靜電容量變化:最初規定值的 $\pm$ 5%以內. 損失角:低於規定值 , 泄漏電流:低於規定值, 外觀:無異常 .
14	Vibration 振動	MIL-STD-202Method 204	5g's for 20 minutes 12 cycles each of 3 orientations. Note: Use 8"X5" PCB .031" thick with 7 secure points on one 8" side and 2 secure points on corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10-2000 Hz. 5G 20分鐘, 三個方向每個方向12個循環。注意: 使用 8"X5" 印刷線路板, .031" 厚, 在長的一邊有7個固定點, 在對面的邊的角有2個固定點。產品在距離固定點2"內安裝。測試頻率從10-2000赫茲。	Capacitance change : within $\pm$ 5% of the initial specified value. Tan δ :less than specified value .Leakage current : less than specified value , No damage or leakage of electrolyte . 靜電容量變化:最初規定值的 $\pm$ 5%以內. 損失角: 低於規定值 . 泄漏電流: 低於規定值, 無損傷或電解液漏出 .
15	Resistance to Soldering Heat 抗焊接熱	MIL-STD-202 Method 210	Condition B no pre-heat of samples. Note: Single Wave Solder. Procedure 1 with solder within 1.5mm of device body for Leaded and 0.75mm for SMD. SMD – remove carrier. 條件B, 樣品不進行預熱。注意: 單一波峰焊。按程序1焊接, 對於引腳器件浸入器件本體的1.5mm的深度, 對於表面貼裝元件為0.75mm。表面貼裝元件-去除載體。	Capacitance change : within $\pm$ 10% of the initial specified value. Tan δ :less than specified value .Leakage current : less than specified value . 靜電容量變化:最初規定值的 $\pm$ 10%以內. 損失角:低於規定值 . 泄漏電流:低於規定值 .


NO.	Stress应力方式	Reference参考方法	Additional Requirements 附加要求	SPECIFICATION 規格
18	Solderability 可焊性	J-STD-002	For both Leaded & SMD. Electrical Test not required. Magnification 50 X. Conditions: Leaded: Method A @ 235° C, category 3. SMD: a) Method B, 4 hrs @ 155°C dry heat @235°C b)Method B @ 215°C category 3 c)Method D category 3 @ 260°C. 用于引脚和表面贴装元件，不需要电气测试。放大倍数50倍。测试条件： 引脚产品：方法A@235℃，类别3。 表面贴装元件：a) 方法B, 4 小时@155℃干热@235℃ b)方法B @215℃ 类别3。 c)方法D 类别3 @260℃	The solder alloy shall cover the 95% or more of the dipped lead's area . 錫液要覆蓋導針浸入表面積的 95% 以上 .
19	Electrical Characterization 电气特性	User Spec.用户规格	Parametrically test per lot and sample size requirements, summary to show Min, Max, Mean and Standard deviation at room as well as Min and Max operating temperatures. 按批次和样品数量要求进行参数试验，总结列出室温下及最低，最高工作温度下器件的最小值，最大值，平均值和标准偏差。	Capacitance change :within $\pm 20\%$ of the initial measured value. 靜電容量變化:最初測定值的 $\pm 20\%$ 以內. Leakage current : 漏电流: Under 125 °C for 10 times specification values. 125℃為規格值10倍以下. 105 °C for 8 times the specification values. 105℃為規格值8倍以下, 85 °C for 5 times the specification values. 85℃為規格值5倍以下, Tan δ :less than specified value . 損失角:低於規定值 .
20	Flammability可燃性	UL-94	V-0 or V-1 Acceptable. Test is applicable to components having a resin case. V-0或V-1可接受。此项测试适用于有树脂底座的器件。	
21	Board Flex 板弯曲	AEC-Q200-005	60 sec minimum holding time. 至少60秒的支撑时间	
22	Terminal Strength (SMD) 端子强度（表面贴装元件）	AEC-Q200-006	無	Capacitance change:within $\pm 5\%$ of the initial specified value. Tan δ :less than specified value . Leakage current : less than specified value . 靜電容量變化:最初規定值的 $\pm 5\%$ 以內. 損失角:低於規定值 . 泄漏電流:低於規定值
27	Surge Voltage 浪涌电压	JIS-C-5101-1	Rated surge voltage shall be applied (switch on) for 30 $\pm$ 5 seconds and then shall be applied (switch off) with discharge for 330 $\pm$ 5 seconds at room temperature . This cycle shall be repeated for 1000 cycles .Duration of one cycle is 6 $\pm$ 0.5 minutes . 在常溫下施加 (合上開關) 額定涌浪電壓 30 $\pm$ 5 秒, 然後停止施加 (斷開開關) 涌浪電壓並且放電 330 $\pm$ 5秒. 這個循環要重复1000 次 . 以 6 $\pm$ 0.5 分鐘為一個循環周期 .	Capacitance change:within $\pm 15\%$ of the initial specified value.Tan δ :less than specified value . Leakage current : less than specified value . Appearance : no abnormal . 靜電容量變化:最初規定值的 $\pm 15\%$ 以內. 損失角:低於規定值 . 泄漏電流:低於規定值 . 外觀: 無異常 .

三. Electrical/Mechanical Characteristics 電氣/機械特性:

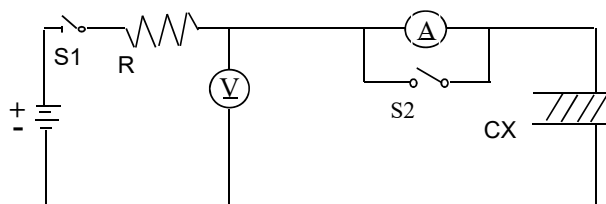3.1	SERIES	CK																
3.2	Rated voltage 額定電壓	6.3~100VDC																
3.3	Operating Temperature Range 應用溫度範圍	Operating temperature range is the range of allowable working temperature at Which the capacitor can be operated continuously at rated voltage. 溫度範圍: 指電容器在額定電壓連續使用時, 其允許的溫度範圍。 spec: 6.3V~100V -55℃~+105℃																
3.4	Capacitance 靜電容量	Measuring Temperature 測試溫度: 20±2℃ Measuring frequency : 測定頻率: 120Hz ± 20% Measuring voltage 測定電壓: 0.5Vrms or less +1.5 to 2.0VDC Measurement circuit : 測定電路: [] spec: ±20%(M)																
3.5	Dissipation factor 散逸因素(tan δ)	Measurement shall be made under the same conditions as those given for the measurement of capacitance. 測試電容時,須符合以下之規定. spec: <table><tr><td>Rated Voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63~100</td></tr><tr><td>tan δ(Max)</td><td>0.32</td><td>0.28</td><td>0.24</td><td>0.18</td><td>0.15</td><td>0.14</td><td>0.12</td></tr></table>	Rated Voltage (V)	6.3	10	16	25	35	50	63~100	tan δ(Max)	0.32	0.28	0.24	0.18	0.15	0.14	0.12
Rated Voltage (V)	6.3	10	16	25	35	50	63~100											
tan δ(Max)	0.32	0.28	0.24	0.18	0.15	0.14	0.12											
3.6	Leakage current 洩漏電流	DC leakage current shall be measured after 2 minutes application of the DC rated working voltage through the series resistor 1,000 Ω at 20℃ . 在20℃下以工作電壓. 施加電流於串聯電容器之電阻1000Ω 2 分後 測定直流漏電流. Measurement circuit 測定電路:  R : 1000 ± 100Ω S1 : Switch 開關 (A) : DC current meter 直流電流計 S2 : Switch for protect of current meter 直流電流計的保護開關 (V) : DC voltage meter 直流電壓計 CX : Test capacitor 測試電容 The following specifications shall be satisfied when the rated voltage is applied for the required time. 印加額定工作電壓, 其通電時間.須符合下面要求. spec: $I \leq 0.01CV$ or 3(μA), which is greater.(After 2 minutes application of rated voltage)																

SMD 产品是符合J-STD020中的Reflow條件,具體條件如下:
SMD products are in line with the J - STD020 Reflow conditions and specific conditions are as follows:

Reflow Soldering Test

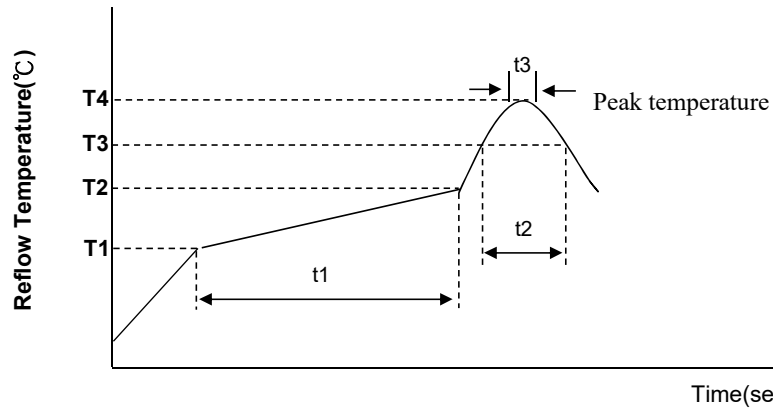

Test conditions

Profile Feature	Pb Free Assembly	
	4~6.3Ø	8~18Ø
Average Ramp-up Rate	3°C/second max	3°C/second max
Preheat		
Temperature Min(T1 min)	150°C	150°C
Temperature Max(T2 max)	180°C	180°C
Time (t1 Max)	120sec	120sec
Ramp-up Rate (T2 ~T3)	3°C/second max	3°C/second max
Time maintained above Temperature(T3)	217°C	217°C
Time(t2 Max)	90sec	40sec
Peak Temperature(T4)	260°C	245°C
Time(t3 Max)	5sec	5sec
Reflow cycles	1	2 or less

* Please ensure that the capacitor became cold enough to the room temperature(5~35°C) before the second reflow.

3.8

Standards
參考標準

JIS C-5101-4(IEC 60384)

Marking :

Fig.1 ØD=4~10mm





Fig.2 ØD≥12.5mm

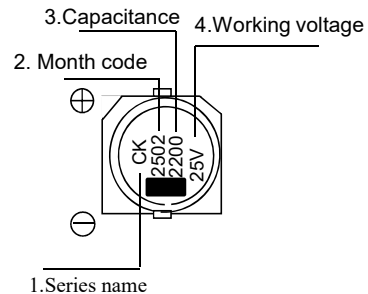

1.Series name:

Fig.1	Code	S	H	N	K	D	DL	Fig.2	CS	CH	CN	CK	CD	CDL
	Series	CS	CH	CN	CK	CD	CDL		CS	CH	CN	CK	CD	CDL

2.Month code:

Fig.1	Code	1	4	7	O	Fig.2	Date Code	Production Date
	Month	1~3	4~6	7~9	10~12		2502	The 2 th week of 2025Y

3.Capacitance:

Code	10	100	1000
Capacitance ('uF)	10	100	1000

4.Working voltage:

Code	4V	6.3V	10V	16V	25V	35V	50V	63V	80V	100V
WV (V)	4V	6.3V	10V	16V	25V	35V	50V	63V	80V	100V

鋁電解電容器存放環境與控制

Storage Conditions and Control for Aluminum Electrolytic Capacitor

1. 環境溫度：5°C ~ 35°C, 環境相對濕度：75%以下。

Store the capacitor at a temperature of 5°C to 35°C and at a relative humidity of less than 75% .

2. 存放環境不應有陽光直射, 不宜高溫。

Store the capacitor in low temperature places free from direct sun shine .

3. 存放環境不能有鹽分、油含量高的霧氣。

Store the capacitor in places free from oil vapor、salt water vapor.

4. 存放在遠離氯氣、氨氣、硫化氫、亞硫酸、硝酸等有害氣體含量高的地方。

Store the capacitor in places far from toxic gases (chlorine、ammonium、hydrogen sulfide、sulphurous acid、nitric acid , etc) .

5. 儲存環境不能有臭氧、紫外線或輻射。

Store the capacitor in place free from Ozone、ultraviolet ray or radiation .

Detergent needing attention:

使用清潔劑之注意事項:


Hydrogen carbide liquid and halogen liquid can cause Aluminium Electrolytic Capacitor to corrode. Some of Safe and Unsafe detergent are as follows;

鋁質電解電容器會受含有碳化氫鹵素溶劑之侵蝕,下列為各種安全與不安全之清潔劑,為避免不必要的損失,您所使用有關印刷基板之清潔劑名請事先告知本公司.

Safe 安全	Unsafe 不安全
Methanol 甲醇	1.1.2- trichloroethane 1.1.2- 三氯乙烷
Ethanol 乙醇	Tetrachloroethylene 四氯化碳
Propanol 丙醇	Chloroform(colorless volatilizable liquid) 哥羅仿(無色揮發性液體)
Butanol 丁醇	Dichloromethane 二氯甲烷
Detergent 去垢劑	Trichlorethylene 三氯甲烯
	Dimethybenzene 二甲苯

V-Chip Aluminum Electrolytic Capacitors

Structure and materials

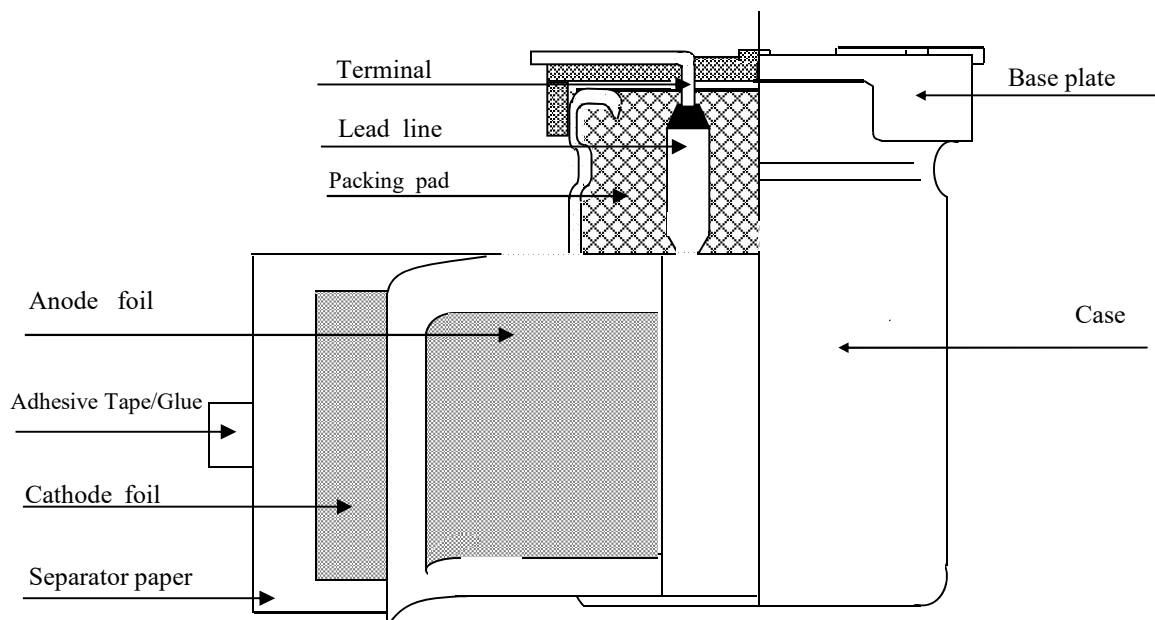

V-Chip type capacitors component

Part name	Materials
Terminal	Tin Coated Copper Covered Steel Wire
Lead line	Aluminum 99.90%
Packing pad	Synthetic rubber
Anode Foil	Formed aluminum 99.9% over
Cathode Foil	Formed aluminum 98.1% over
Separator paper	Manila Espartos
Adhesive Tape/Glue	Phenylene Sulfide ;Glue:PVA
Base plate	Polyphenylene oxide;Glass fibre
Case	Aluminum 98%+PU coating

6. PRECAUTIONS AND GUIDELINES TO USERS

When using aluminum electrolytic capacitors, pay strict attention to the following:

1. Electrolytic capacitors for DC application require polarization.

Confirm the polarity. If used in reversed polarity, the circuit life may be shortened or the capacitor may be damaged. For use on circuits whose polarity is occasionally reversed, or whose polarity is unknown, use bi-polarized capacitors(BP-series). Also, note that the electrolytic capacitor cannot be used for AC application.

2. Do not apply a voltage exceeding the capacitor's voltage rating.

If a voltage exceeding the capacitor's voltage rating is applied, the capacitor may be damaged as leakage current increases. When using the capacitor with AC voltage superimposed on DC voltage, care must be exercised that the peak value of AC voltage does not exceed the rated voltage.

3. Do not allow excessive ripple current to pass.

Use the electrolytic capacitor at current values within the permissible ripple range. If the ripple current exceeds the specified value, request capacitors for high ripple current applications.

4. Ascertain the operating temperature range.

Use the electrolytic capacitors according to the specified operating temperature range. Usage at room temperature will ensure longer life.

5. The electrolytic capacitor is not suitable for circuits in which charge and discharge are frequently repeated.

If used in circuits in which charge and discharge are frequently repeated, the capacitance value may drop, or the capacitor may be damaged. Please consult our engineering department for assistance in these applications.

If the electrolytic capacitor is allowed to stand for a long time, its withstand voltage is liable to drop, resulting in increased leakage current. If the rated voltage is applied to such a product, a large leakage current occurs and this generates internal heat, which damaged the capacitor. If the electrolytic capacitor is allowed to stand for a long time, therefore, use it after giving voltage treatment .(However,the electrolytic capacitors can be guarantee for 2 years if keep in the normal temperature.)

6. Be careful of temperature and time when soldering.

When soldering a printed circuit board with various components, care must be taken that the soldering temperature is not too high and that the dipping time is not too long. Other wise, there will be adverse effects on the electrical characteristics and insulation sleeve of electrolytic capacitors in the case of small-sized electrolytic capacitors, nothing abnormal will occur if dipping is performed at less than 260 °C for less than 10 seconds.

7. Do not place a soldering iron body of the capacitor.

The electrolytic capacitor is covered with a vinyl sleeve. If the soldering iron comes in contact with the electrolytic capacitor body during wiring, damage to the vinyl sleeve and/or case may result in defective insulation, or improper protection

8. Cleaning circuit boards after soldering.

Some solvents have adverse effects on capacitors.

Please refer to the next page.

9. Do not apply excessive force to the lead wires or terminals.

If excessive force is applied to the lead wires and terminals, they may be broken or their connections with the internal elements may be affected. (For strength of terminals, refer to JIS C5101-1, JIS C5101-4)

10. Care should be used in selecting a storage area.

If electrolytic capacitors are exposed to high temperatures caused by such things as direct sunlight, the life of the capacitor may be adversely affected. Storage in a high humidity atmosphere may affect the solderability of lead wires and terminals.

11. Surge voltage:

Rated surge voltage shall be applied for 30 seconds and then shall be applied with discharge,for 330 seconds at room temperature .This cycle shall be repeated for 1000 cycles;Duration of one cycle is 6 minutes ;then to judge capacitor's characteristics and appearance.


Rated Voltage(WV)	4	6.3	10	16	25	35	50	63	80	100
Surge Voltage(SV)	4.6	7.2	11.5	18.4	28.8	40.3	57.5	72.5	92	115

For methods of testing, refer to JIS C 5101-1, JIS C 5101-4.

※ The above mentioned material according to EIAJRCR-2367B (issued in March, 2002), titled "Guideline of notabilia for aluminum electrolytic capacitors for use in electronic equipment". Please refer to the book for details.

CAPACITORS PACKING INFORMATION

● V-CHIP REEL

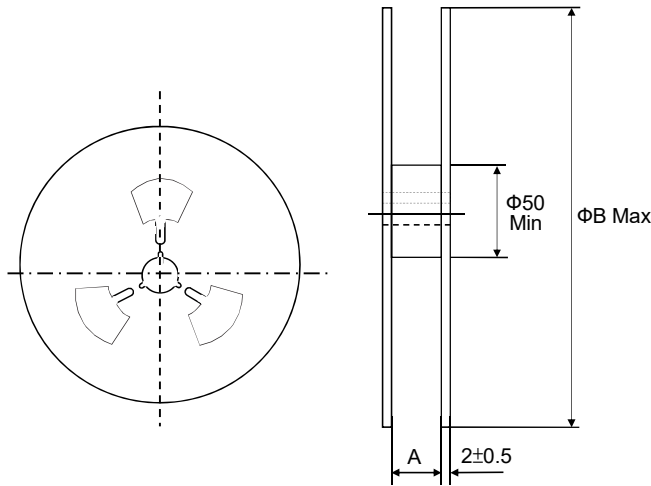


Package Quantity	
Size($\Phi \times L$)	Q'ty/reel
$\Phi 4$	2000pcs
$\Phi 5$	1000pcs
$\Phi 6.3 \times 4 \sim 8L$	1000pcs
$\Phi 6.3 \times 8.4L$	800pcs
$\Phi 8 \times (6 \sim 7L)$	1000pcs
$\Phi 8 \times (10 \sim 11)$	500pcs
$\Phi 10 \times (7 \sim 11)$	500pcs
$\Phi 10 \times (12 \sim 13)$	400pcs
$\Phi 10 \times (16 \sim 17)$	300pcs
$\Phi 12.5 \times (13 \sim 14)$	250pcs
$\Phi 12.5/16 \times (16 \sim 17)$	200pcs
$\Phi 16 \times (21 \sim 22)$	125pcs
$\Phi 18 \times (16 \sim 17)$	150pcs
$\Phi 18 \times (21 \sim 22)$	100pcs

(單位：mm)

Size	$\phi 4 \sim 5$	$\phi 6.3$	$\phi 8$	$\phi 10$	$\phi 12.5$	$\phi 16$	$\phi 18$
A	14	18	26	26	34	46	46
B	382	382	382	382	382	382	382

■ V-CHIP PACKAGE

● Carrier tape

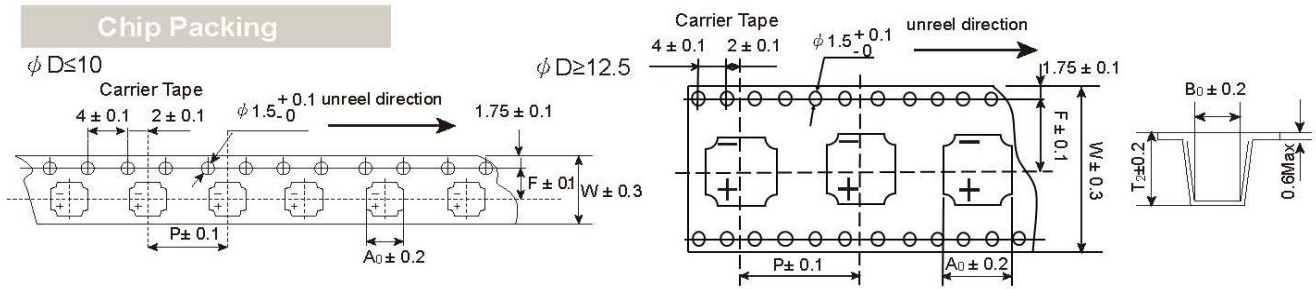

(單位：mm)

Size ($\Phi \times L$)	Item					
	W	P	F	A_0	B_0	T_2
$4 \times 5.3 \sim 5.6L$	12.0	8.0	5.5	5.0	5.0	5.8
$4 \times 5.7 \sim 6.3L$	12.0	8.0	5.5	5.0	5.0	6.3
$4 \times 7L$	12.0	8.0	5.5	5.0	5.0	7.5
$5 \times 5.3 \sim 5.6L$	12.0	12.0	5.5	5.0	5.0	5.9
$5 \times 5.7 \sim 6.3L$	12.0	12.0	5.5	5.0	5.0	6.3
$5 \times 6.4 \sim 7.0L$	12.0	12.0	5.5	5.0	5.0	7.6
$6.3 \times 4.5L$	16.0	12.0	7.5	7.0	7.0	4.8
$6.3 \times 5.4 \sim 5.6L$	16.0	12.0	7.5	7.0	7.0	5.9
$6.3 \times 5.7 \sim 6.3L$	16.0	12.0	7.5	7.0	7.0	6.5
$6.3 \times 7 \sim 8L$	16.0	12.0	7.5	7.0	7.0	8.3
$6.3 \times 8.1 \sim 9L$	16.0	12.0	7.5	7.0	7.0	9.3
$8 \times 6 \sim 7L$	16.0	12.0	7.5	8.7	8.7	6.9
$8 \times 10 \sim 11L$	24.0	16.0	11.5	8.7	8.7	11
$10 \times 7.7L$	24.0	16.0	11.5	10.7	10.7	8.7
$10 \times 10 \sim 11L$	24.0	16.0	11.5	10.7/11.4(G)	10.7/11.4(G)	11/11.4(G)
$10 \times 12 \sim 13L$	24.0	16.0	11.5	10.7	10.7	13.1
$10 \times 16 \sim 17L$	24.0	16.0	11.5	10.7	10.7	17.5
$12.5 \times 13 \sim 14L$	32.0	24.0	14.2	13.4	13.4	15
$12.5 \times 16 \sim 17L$	32.0	24.0	14.2	13.4	13.4	17.5
$16 \times 16 \sim 17L$	44.0	28.0	20.2	17.5	17.5	17.5
$16 \times 21 \sim 22L$	44.0	28.0	20.2	17.5	17.5	23
$18 \times 16 \sim 17L$	44.0	32.0	20.2	19.5	19.5	17.5
$18 \times 21 \sim 22L$	44.0	32.0	20.2	19.5	19.5	23

(G) "Anti-vibration Structure"

使用時注意事項:Precautions for users

1.輕拿輕放handle gently

2.取出托盤時,請用手托住紙盤底部,以免電容鬆散.When take the tray out, pls support the bottom of the paper plate with your hands to avoid loose capacitors.