
DASH NO.	M CODE	MADE FROM

GSD

7703-2

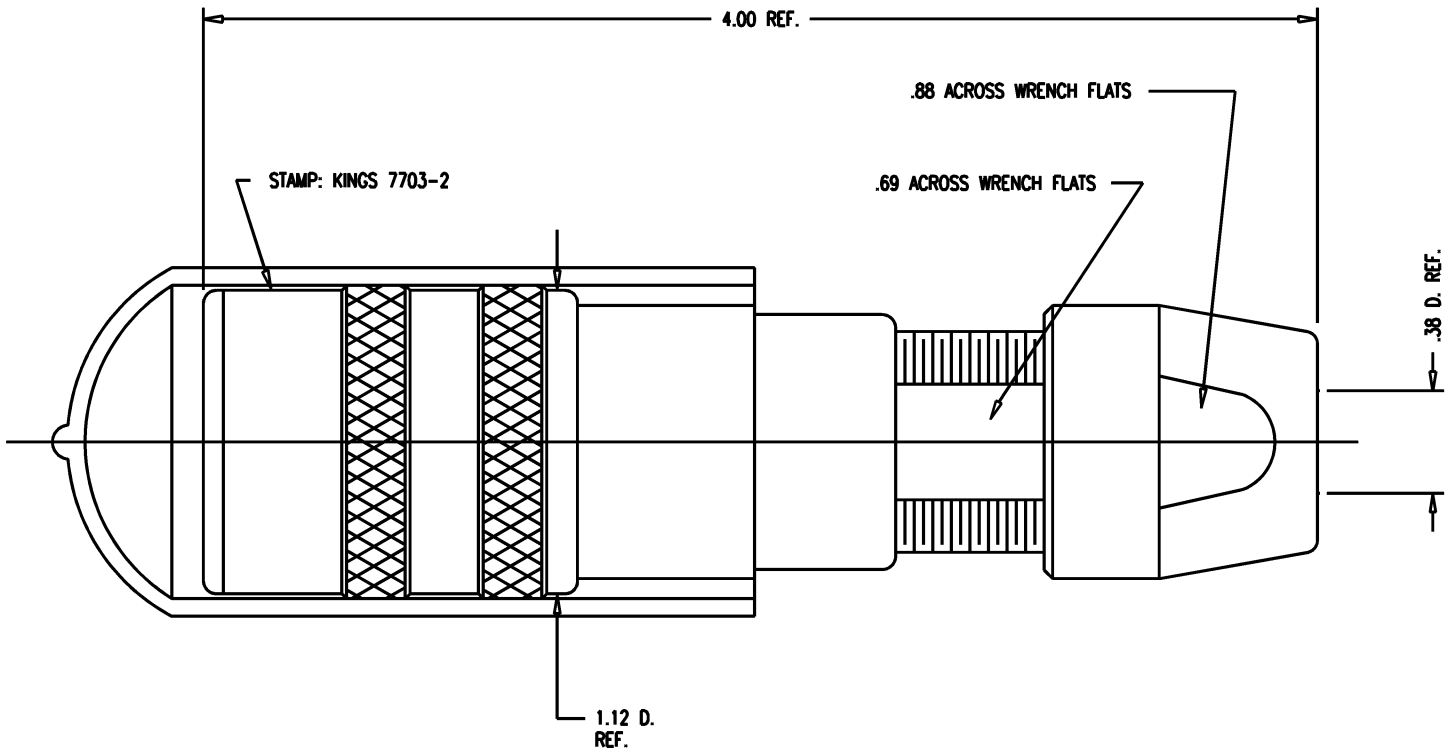

NOTES:

1. FOR USE WITH 730 CABLE GROUP.
2. FOR CABLING INSTRUCTIONS SEE KAI-8010.
3. FOR CRIMPING USE DIE SIZE KTH-2002.
4. MATERIALS:
   - INSULATORS: TEFLON, ASTM-D-4894
   - GASKETS: SILICONE RUBBER, ZZ-R-765
   - CAP: VINYL
   - K-GRIP SLEEVE: COM'L BRONZE, ASTM-B-135
   - CENTER CONTACT, OUTER CONTACT SPRING, INSERT } BER. COPPER, ASTM-B-196
   - ALL OTHER METAL PARTS: BRASS, ASTM-B16
5. FINISHES:
   - CENTER CONTACT, OUTER CONTACT SPRING } GOLD PLATE PER MIL-G-45204
   - NUTS, COLLET, BODIES } KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
   - ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
6. ELECTRICAL CHARACTERISTICS:
   - NOMINAL IMPEDANCE: 75 ~W
   - FREQUENCY RANGE: DC-500 MHZ
   - VOLTAGE BREAKDOWN: CENTER CONDUCTOR/INNER GROUND: 1500 VRMS
     INNER GROUND/OUTER GROUND: 500 VRMS

GSD

REVISIONS	
ISSUE	CHANGES
0	ER 35423 KH 04/10/95
1	CN 36678 A KH 11/07/95
2	CN 37238 D KH 02/03/97
3	CN 39531 C AM 07/12/06
4	CN 39551 E AM 07/31/06

SCALE 2:1

APPROX SURFACE AREA

USED ON

REF: KP-8020-730-400

JK, TRI-LOC,
SERIAL DIGITAL

DRAWN	KH	DATE	04/10/95
DESIGN	DW	DATE	04/11/95
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

7703-2

MAY 2007 THIS DRAWING BECAME THE PROPERTY OF PROPERTY OF
WINCHESTER ELECTRONICS CORPORATION, WALLINGFORD, CT 06492