
150W DC-DC Half-Brick Regulated Single Output Converter MHB150 series

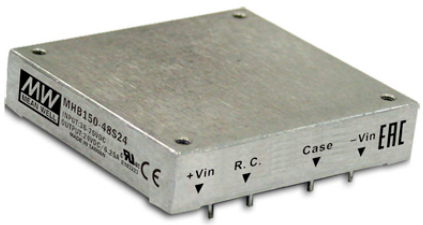

Features :

- Half-brick size (2.28"X2.4"X0.5") with industry standard pin out
- 2:1 wide input range
- Protections: Short circuit / Over current / Over voltage / Over temperature
- High efficiency up to 89%
- 1500VDC I/O isolation
- Built-in remote ON/OFF control
- Built-in remote sense function
- Trimming output ±10%
- Five-sided shield metal case
- Optional heat sinks for extended operating temperature
- Output 3.3V/15V available
- Approvals: UL / CUL / EAC / CE / UKCA
- 3 years warranty

GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx


SPECIFICATION

MODEL			MHB150-48S05	MHB150-48S12	MHB150-48S24
OUTPUT	DC VOLTAGE		5V	12V	24V
	CURRENT RANGE		0 ~ 30A	0 ~ 12.5A	0 ~ 6.25A
	RATED POWER		150W		
	RIPPLE & NOISE (max.) Note.2		100mVp-p	150mVp-p	240mVp-p
	VOLTAGE ACCURACY Note.3		±1.0%		
	LINE REGULATION		±0.2%		
	LOAD REGULATION		±0.2%		
	SWITCHING FREQUENCY (Typ.)		500KHz		
	EXTERNAL TRIM ADJ. RANGE (Typ.)		±10%		
	EXTERNAL CAPACITIVE LOAD (max.)		30000uF	12500uF	6250uF
INPUT	RATED DC INPUT		48VDC		
	VOLTAGE RANGE		36 ~ 75VDC		
	SURGE VOLTAGE (100ms max.)		100VDC		
	UNDER VOLTAGE LOCKOUT		Power up: 34VDC, Power down: 32.5VDC		
	EFFICIENCY (Typ.)		86%	89%	89%
	DC CURRENT	FULL LOAD	3.7A	3.6A	3.6A
		NO LOAD	25mA		
	FILTER		Pi-network		
PROTECTION	OUTPUT OVER CURRENT		110 ~ 140% rated output power		
			Protection type : Over current limiting, recovers automatically after fault condition is removed		
	OUTPUT OVER VOLTAGE (Typ.)		115 ~ 140% rated output voltage		
			Protection type : Output voltage clamp		
	OUTPUT SHORT CIRCUIT		Protection type : Can be continuous, recovers automatically after fault condition is removed		
	OVER TEMPERATURE		100℃±5℃of case temperature		
FUNCTION OPERATING	REMOTE CONTROL		Please refer to "Remote ON/OFF Control" for details		
	OUTPUT TRIMMING		±10%, Please refer to "External Output Trimming" for details		
ENVIRONMENT	WORKING TEMPERATURE (Typ.)		-40 ~ +100℃ ; Thermal shutdown at 100℃±5℃of case temperature (please refer to "Thermal Curve")		
	WORKING HUMIDITY		0% ~ 95% RH max.		
	STORAGE TEMP., HUMIDITY		-55 ~ +105℃, 0 ~ 95% RH		
	TEMP. COEFFICIENT		±0.03%/℃ (0~60℃)		
SAFETY & EMC (Note 4)	SAFETY STANDARDS		UL60950-1, EAC TP TC 004 approved		
	ISOLATION VOLTAGE		I/P-O/P:1500VDC, I/P-Case:1500VDC, O/P-Case:1500VDC		
	ISOLATION RESISTANCE		I/P-O/P:100M Ohms / 500VDC / 25℃/ 70% RH		
	EMC EMISSION		Compliance to BS EN/EN55032 (CISPR32) Class A with external components (please refer to "EMC Suggestion Circuit"), EAC TP TC 020		
	EMC IMMUNITY		Compliance to BS EN/EN61000-4-2,3,4,5,6,8; BS EN/EN55024, light industry level, criteria A, EAC TP TC 020		
OTHERS	CASE MATERIAL		Aluminum		
	MTBF		900K hrs typ. MIL-HDBK-217F (25℃)		
	DIMENSION		57.9*61*12.7mm (2.28"*2.40"*0.5") (L*W*H)		
	PACKING		95g ; 12pcs/EPE, 60pcs/5 per carton		
NOTE	1. All parameters NOT specially mentioned are measured at 48VDC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 1uf ceramic & 10uf tantalum capacitor across output. 3. The power supply need to connect "+Vout" to "+R.S" and "-Vout" to "-R.S". 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx				

■ Mechanical Specification

Unit:inch[mm]

All Dimensions In Inches [mm]
Tolerance Inches: X.XX= ±0.02 , X.XXX= ±0.010
Millimeters: X.X= ±0.5 , X.XX=±0.25

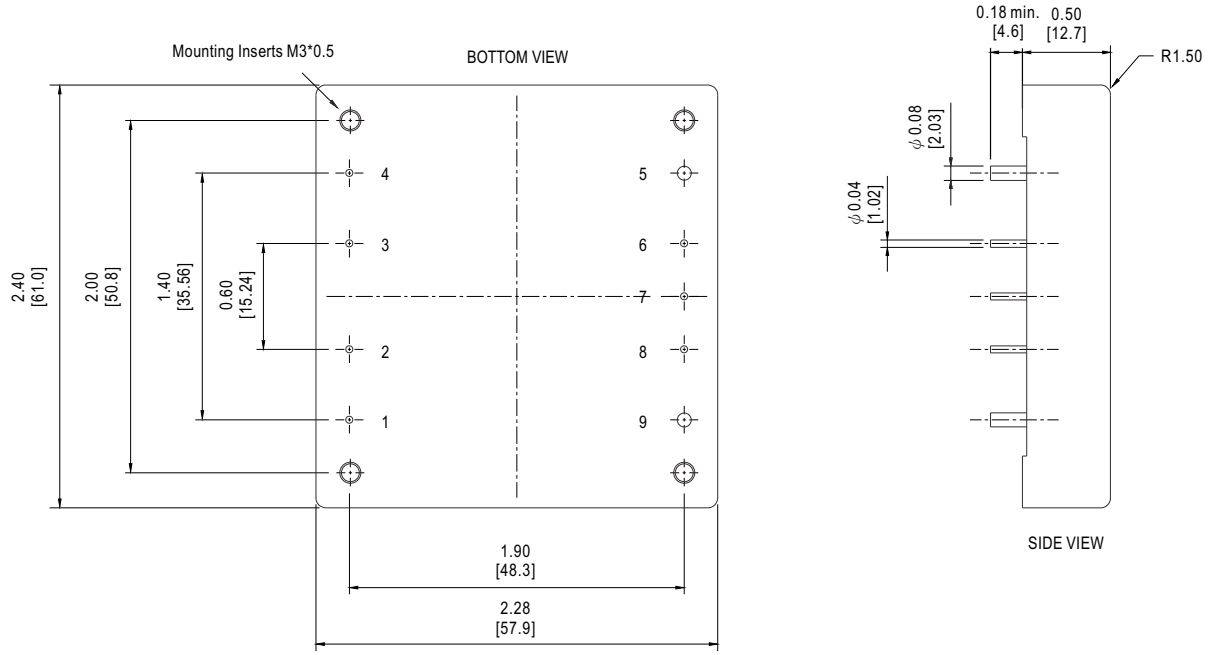

Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment	Pin No.	Assignment
1	+Vin	4	-Vin	7	Trim
2	R.C.	5	-Vout	8	+R.S.
3	Case	6	-R.S.	9	+Vout


■ Remote ON/OFF Control

The MHB150 series allow the user to switch the power ON and OFF electronically by their remote ON/OFF feature.
The MHB150 series are available with "Positive Logic" (standard) or "Negative Logic" (option).

Logic table

Logic State(pin2)	Positive logic	Negative logic
Logic Low-Switch Closed	Power OFF(<0.8Vdc)	Power ON(<0.8Vdc)
Logic High-Switch Open	Power ON(Open circuit)	Power OFF(Open circuit)

Note: 1.Logic compatibility : R.C.(pin2) ~ -Vin(pin4).
2.Suffix "N" to the model number with Negative logic remote ON/OFF.

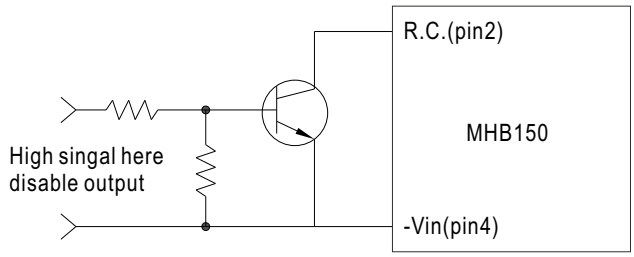

Example control circuit(positive logic)

■ External Output Trimming

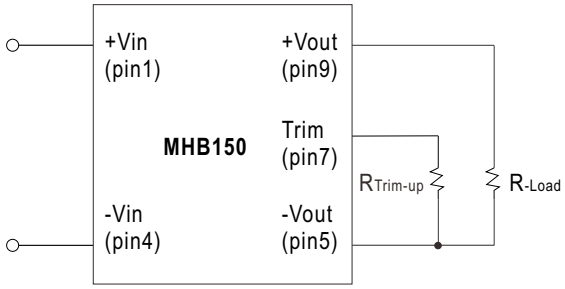


Figure 1 : Trim-up voltage setup

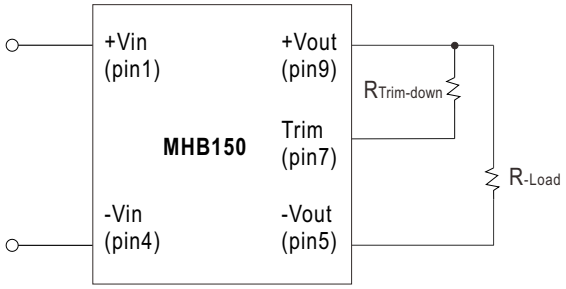


Figure 2 : Trim-down voltage setup

The value of $R_{Trim-up}$ defined as:

$$R_{Trim-up} = \frac{(R1-R2\times(Vo-Vo,nom))}{(Vo-Vo,nom)} (K\Omega)$$

Where: $R_{Trim-up}$ is the external resistor in Kohm.

Vo,nom is the nominal output voltage.

Vo is the desired output voltage.

R1 and R2 are inside the unit and list in Table 1

Output Voltage(V)	R1 (Kohm)	R2 (Kohm)
5V	5.8	3.3
12V	18.945	4.636
24V	41.442	6.977

Table 1

For example, to Trim-up the output voltage of 5.0V model (MHB150-48S05) by 8% to 5.4V, $R_{Trim-up}$ is calculated as follows:

Vo - Vo,nom = 5.4 -5.0 = 0.4V

R1 = 5.8 Kohm

R2 = 3.3 Kohm

$$R_{Trim-up} = \frac{5.8-3.3\times0.4}{0.4} = 11.2 (K\Omega)$$

The value of $R_{Trim-down}$ defined as:

$$R_{Trim-down} = \frac{(R1-R2\times(Vo,nom-Vo))}{(Vo,nom-Vo)} (K\Omega)$$

Where: $R_{Trim-down}$ is the external resistor in Kohm.

Vo,nom is the nominal output voltage.

Vo is the desired output voltage.

R1 and R2 are inside the unit and list in Table 2.

Output Voltage(V)	R1 (Kohm)	R2 (Kohm)
5V	5.8	5.32
12V	86.45	60.1
24V	430	120

Table 2

For example, to Trim-down the output Voltage of 5.0V model (MHB150-48S05) by 8% to 4.6V, $R_{Trim-down}$ is calculated as follows :

Vo,nom - Vo = 5.0 - 4.6 = 0.4 V

R1 = 5.8 Kohm


R2 = 5.32 Kohm

$$R_{Trim-down} = \frac{5.8-5.32\times0.4}{0.4} = 9.18 (K\Omega)$$

■ Thermal Curve

The operating case temperature range of MHB-150 series is -40°C to +100°C. When operate the MHB-150 series, proper de-rating or cooling is needed.

The maximum case temperature under any operating condition should not be exceed 100°C. The following curve is the de-rating curve of MHB-150 series without heat sink.

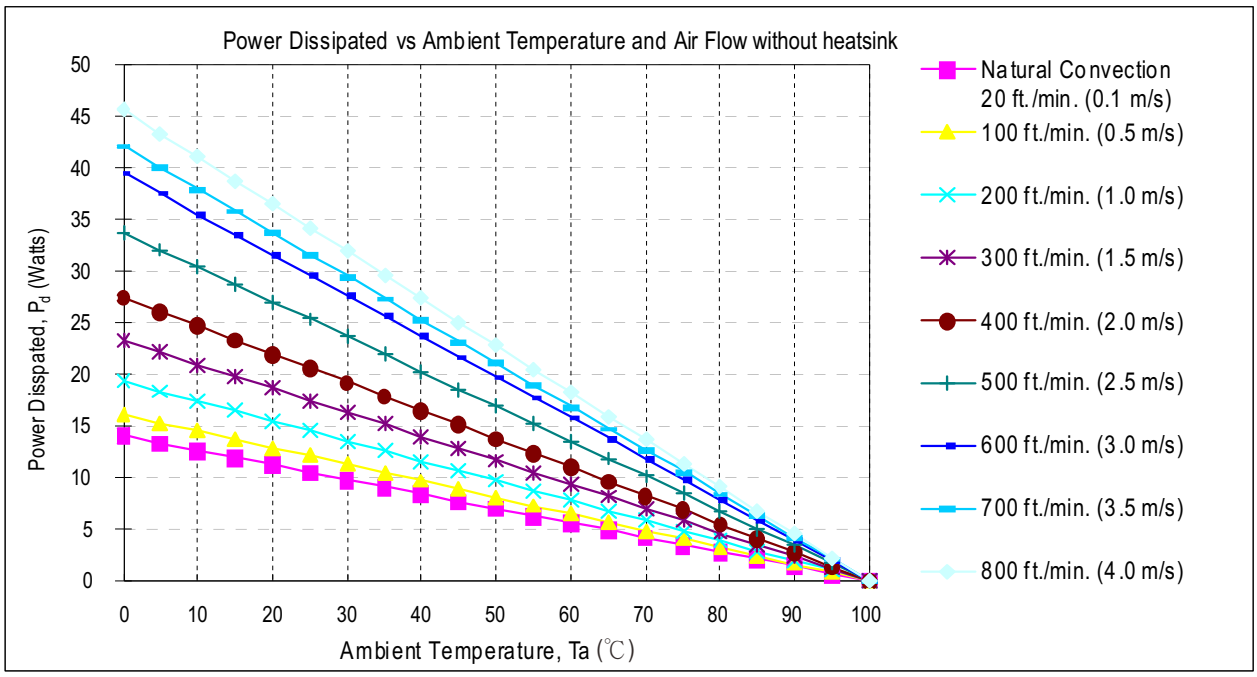

Air Flow Rate	Typical Rca	Air Flow Rate	Typical Rca
Natural convection 20ft./min. (0.1m/s)	7.12℃/W	500 ft./min. (2.5m/s)	2.96℃/W
100 ft./min. (0.5m/s)	6.21℃/W	600 ft./min. (3.0m/s)	2.53℃/W
200 ft./min. (1.0m/s)	5.17℃/W	700 ft./min. (3.5m/s)	2.37℃/W
300 ft./min. (1.5m/s)	4.29℃/W	800 ft./min. (4.0m/s)	2.19℃/W
400 ft./min. (2.0m/s)	3.64℃/W		

Rca : Thermal resistance from case to ambience

Example:

What is the minimum airflow necessary for a MHB150-48S12 operates at nominal line, an output current of 12.5A, and a maximum ambient temperature of 40℃?

Solution:

Given: Vin=48Vdc, Vo=12Vdc, Io=12.5A, η (unit efficiency)=89%

Determine Power dissipation (P_d):

P_d=Pi-Po=Po(1-η)/η

P_d=12x12.5x(1-0.89)/0.89=18.54 Watts

Determine airflow:

Given: P_d=18.54W and Ta=40℃

Check Thermal Curve above:

minimum airflow= 500 ft./min.

Verifying: The maximum temperature rise **△T = P_d x Rca=**18.54x2.96=54.88℃

The maximum case temperature **Tc=Ta+△T=**94.88℃ <100℃

Where: The Rca is thermal resistance from case to ambience.


The Ta is ambient temperature and the Tc is case temperature.


■ Case Heat Sink (Optional)

Unit:mm

Model No.: M-C308 (Vertical Fins)



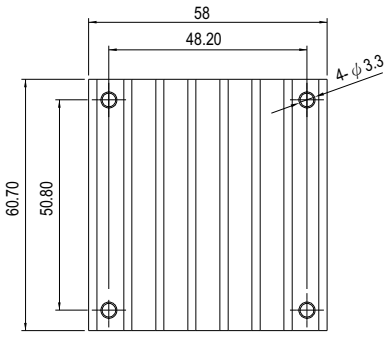


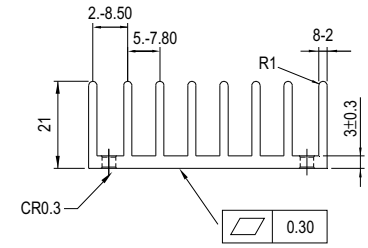


Rca:
3.90℃ / W (typ.), at natural convection
1.74℃ / W (typ.), at 100ft./min.(LFM)
1.33℃ / W (typ.), at 200ft./min.(LFM)
1.12℃ / W (typ.), at 300ft./min.(LFM)
0.97℃ / W (typ.), at 400ft./min.(LFM)

Model No.: M-C091(Horizontal Fins)



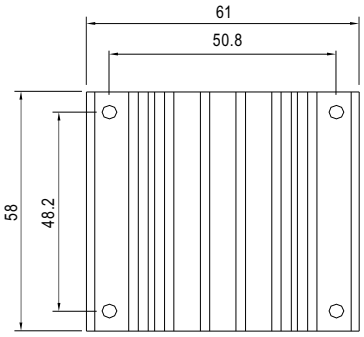





Rca:
4.70℃ / W (typ.), at natural convection
2.89℃ / W (typ.), at 100ft./min.(LFM)
2.30℃ / W (typ.), at 200ft./min.(LFM)
1.88℃ / W (typ.), at 300ft./min.(LFM)
1.59℃ / W (typ.), at 400ft./min.(LFM)

Model No.: M-C092 (Horizontal Fins)




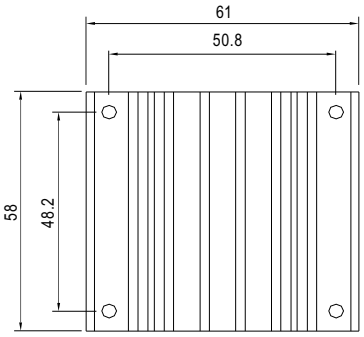

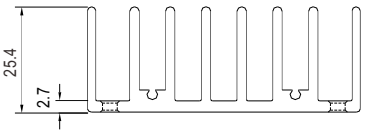

Rca:
3.00℃ / W (typ.), at natural convection
1.44℃ / W (typ.), at 100ft./min.(LFM)
1.17℃ / W (typ.), at 200ft./min.(LFM)
1.04℃ / W (typ.), at 300ft./min.(LFM)
0.95℃ / W (typ.), at 400ft./min.(LFM)


■ Heatsink Assembly

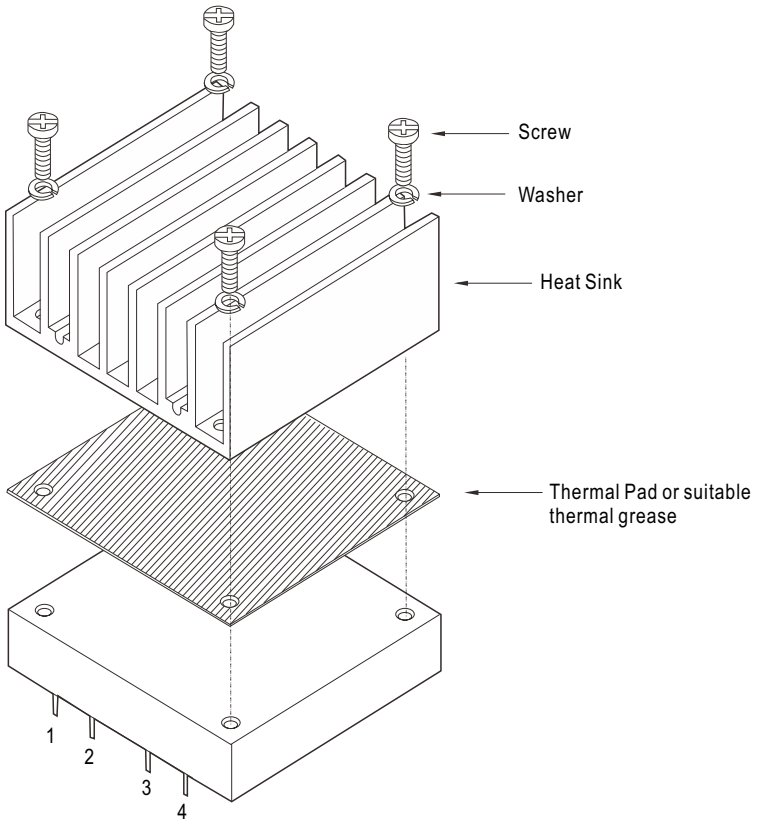

Heat Sink Order No.:
M-C308
M-C091
M-C092
Thermal Pad: 56.9x60x0.25mm
Screw: SMP+SW M3x8L

■ EMC Suggestion Circuit


※Required external components to meet BS EN/EN55032 class A conducted emission are as below:

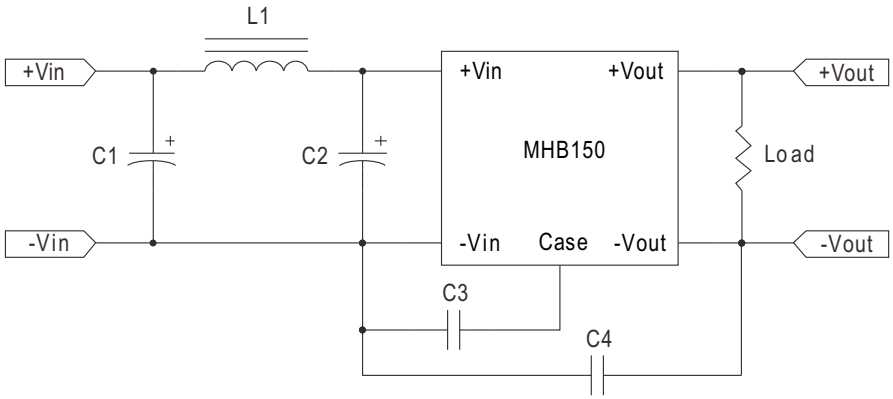

Model No.	C1	C2	C3	C4	L1
MHB150-48S□	47uF/100V ESR<0.17Ω	47uF/100V ESR<0.17Ω	1000pF	1000pF	3.4uH

□=05,12,24

■ Packing

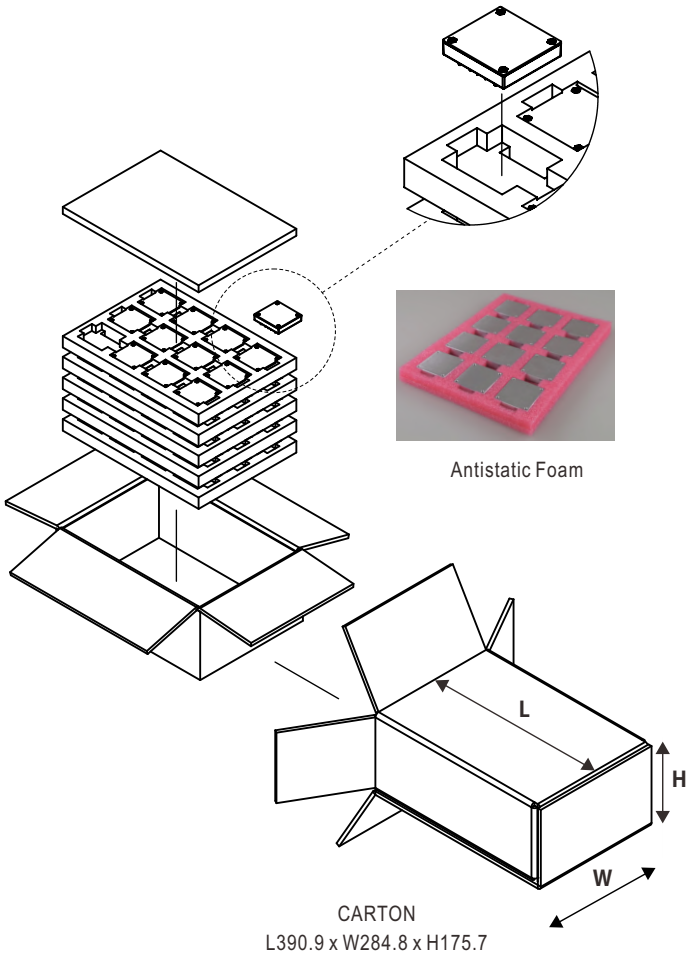Standard Packing	MPQ Per Tray(PCS)	One EPE Tray G.W.	Max. Q'TY/ Carton(PCS)	One Carton G.W.
Unit : mm  Antistatic Foam CARTON L390.9 x W284.8 x H175.7	12	1.175Kg	60	7.2Kg

■ Installation Manual

Please refer to : http://www.meanwell.com/manual.html

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

MEAN WELL:

MHB150-48S05 MHB150-48S12 MHB150-48S24