


DO NOT SCALE

DIMENSIONS IN MM.




3.24




SECTION A - A

4.5




SECTION B - B

7.62



FITS 6.3 X 0.8 TAB


19.18

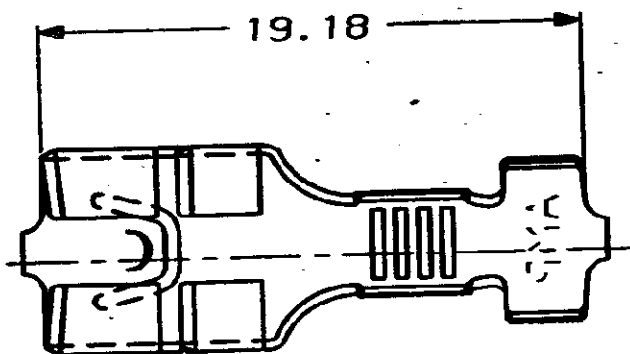

2.3

7.75

4.1

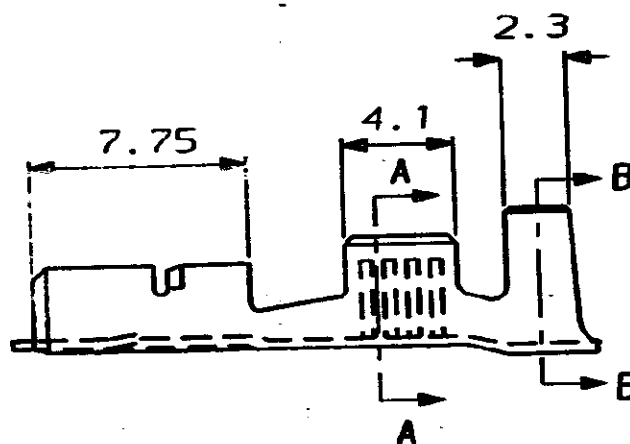WIRE SIZE: 0.50 TO 1.50 mm²

INSULATION RANGE: 2.2 TO 3.1 DIA.



OBSOLETE

346697-5

NICKEL SILVER

UNPLATED

346697-4

PHOS BRONZE

TIN PLATED

346697-3

PHOS BRONZE

UNPLATED

346697-2

BRASS

TIN PLATED

346697-1

BRASS

UNPLATED

PART No.

MATERIAL

FINISH

CUSTOMER DWG
FOR REFERENCE ONLY

© COPYRIGHT 1992 BY AMP OF GREAT BRITAIN LTD.
ALL INTERNATIONAL RIGHTS RESERVED. ALL PRODUCTS
MAY BE COVERED BY BRITISH AND FOREIGN PATENTS AND/OR PATENTS PENDING.

RELEASED FOR PUBLICATION
1992

TOLERANCES
UNLESS OTHERWISE
STATED :
DEC ± 0.5
ANGLES ± 1°

DR. D.A. BARRATT

18.03.92

CH. D. TERRY

APP. D.A. BARRATT

AMP
of Great Britain Ltd.

TERMINAL HOUSE
STANNORE
NIDDX.

3 AEG ECO-10-000445 09JAN10

2 D.A. BARRATT C6420 12.01.93

1 FIRST ISSUE - 18.03.92

REV APPROVED ECN DATE

NAME LOW INSERTION FORCE FASTON
250 SERIES SINGLE WIRE

SCALE

LOC

SIZE

DWG. No.

REV

SHEET

4/1

E

A 4

C346697

3

1 / 1