

Features

- Bi-directional ESD protection of one line
- 70Watts peak pulse power ($t_p = 8/20\mu s$)
- Working voltage: 5V
- Junction Capacitance: 0.3pF(Typ)
- Low clamping voltage
- Low leakage current
- IEC 61000-4-2 $\pm 15kV$ contact $\pm 20kV$ air
- IEC 61000-4-5 (Lightning) 3.8A ($8/20\mu s$)


Applications

- Smart phones
- Display Ports
- MDDI Ports
- USB Ports
- Digital Video Interface (DVI)
- PCI Express and Serial SATA Ports

Mechanical Data

- Package:DFN1006-2L
- Molding compound flammability rating: UL 94V-0
- RoHS/WEEE Compliant

Schematic & PIN Configuration



Ordering Information

Part Number	Package	Marking	Packing	Reel Size
PESD5V0F1BL	DFN1006-2L		10000 Tape & Reel	7 inches

Absolute Maximum Rating($T_A=25^\circ\text{C}$ unless otherwise Specified)


Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μs)	P _{pk}	70	W
Peak Pulse Current (8/20 μs)	I _{PP}	3.8	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V _{ESD}	± 20 ± 15	kV
Operating Temperature Range	T _J	-55 to +125	$^\circ\text{C}$
Storage Temperature Range	T _{stg}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics($T_A=25^\circ\text{C}$ unless otherwise Specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Working Voltage	V _{RWM}				5	V
Breakdown Voltage	V _{BR}	I _T = 1mA	6.0	7.5	8.5	V
Reverse Leakage Current	I _R	V _{RWM} = 5V			0.2	μA
Clamping Voltage	V _C	I _{PP} =1A; t _p =8/20 μs		10	12	V
Clamping Voltage	V _C	I _{PP} =3.8A; t _p =8/20 μs		17	20	V
Junction Capacitance	C _J	V _R =0V; f=1MHz		0.3	0.45	pF


Electrical Parameters ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter
I _T	Test Current
I _{PP}	Maximum Reverse Peak Pulse Current
V _C	Clamping Voltage @I _C

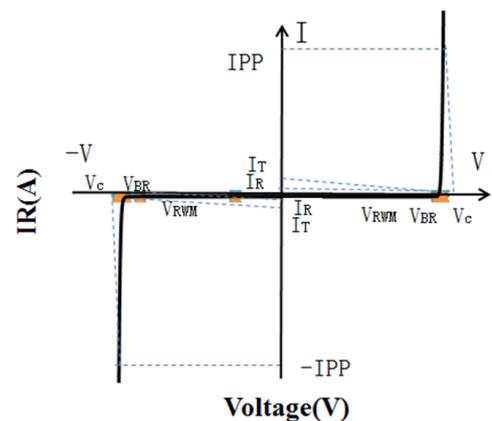





Typical Characteristics($T_A=25^\circ\text{C}$ unless otherwise Specified)

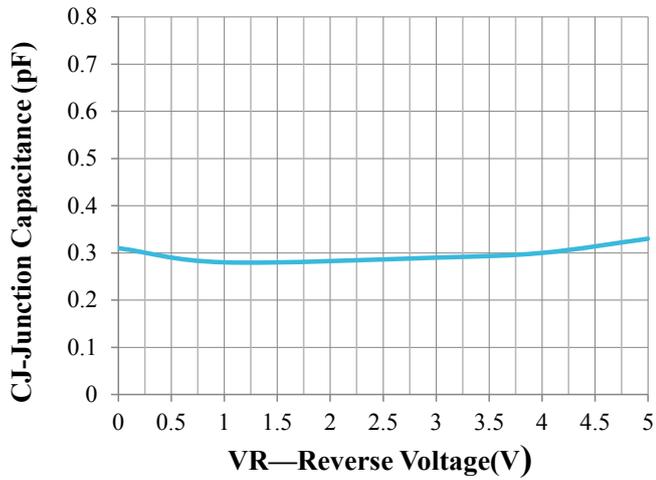


Junction Capacitance vs. Reverse Voltage

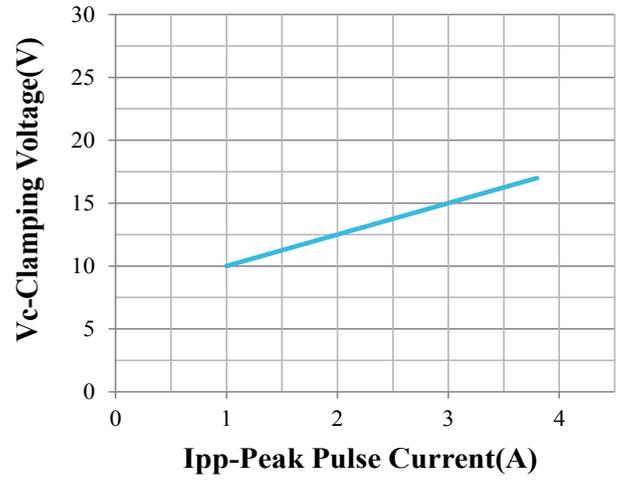


Clamping Voltage vs. Peak Pulse Current

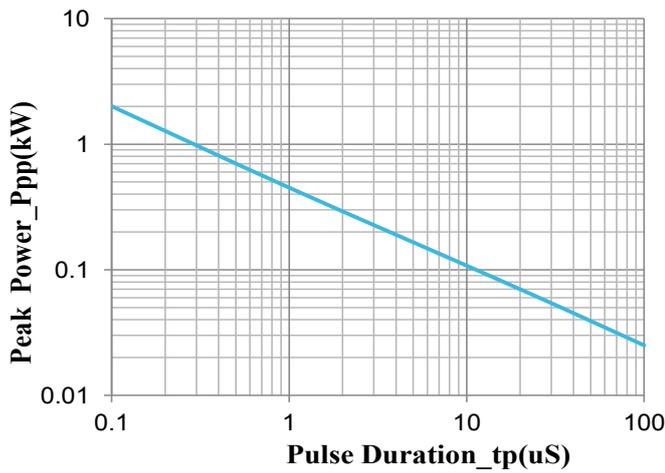


Peak Pulse Power vs. Pulse Time

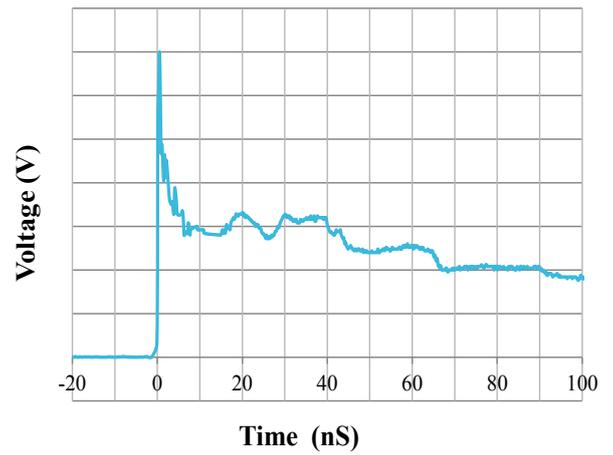

IEC61000-4-2 Pulse Waveform

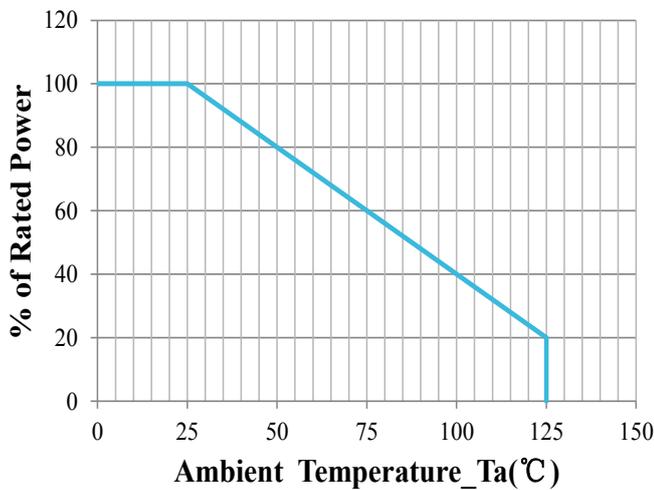


Power Derating Curve

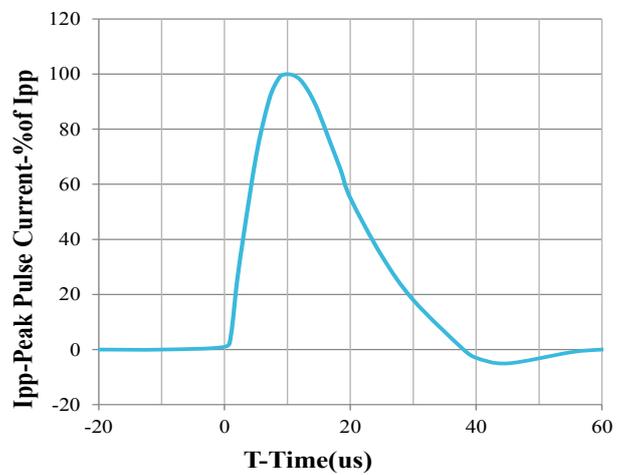

8 X 20us Pulse Waveform



Outline Drawing – DFN1006-2L

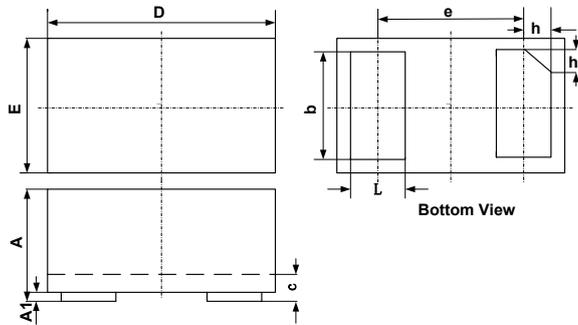

SYM	DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.40	0.42	0.45	0.016	0.018	0.020
A1	0.00	0.02	0.055	0.000	0.001	0.002
b	0.45	0.50	0.55	0.018	0.020	0.022
c	0.12	0.15	0.18	0.005	0.006	0.007
D	0.99	1.02	1.05	0.039	0.040	0.041
e	0.65 BSC			0.026 BSC		
E	0.59	0.62	0.65	0.023	0.024	0.026
L	0.20	0.25	0.30	0.008	0.010	0.012
h	0.07	0.12	0.17	0.003	0.005	0.007