HAOYU

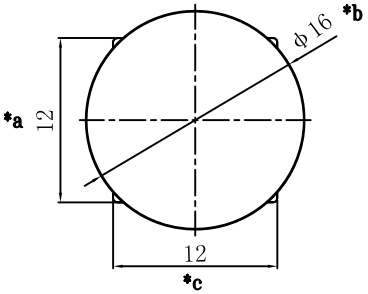





LED CIRCUIT



SW CIRCUIT



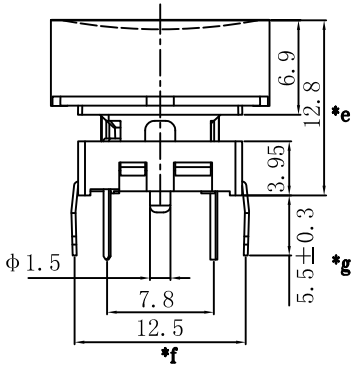

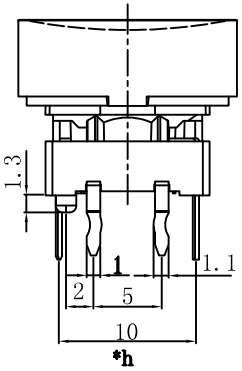



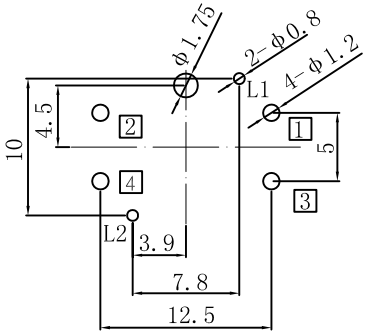

PCB LAYOUT



SPECIFICATION

1.Rating : DC12V 50mA.
2.Contact resistance: ≤100mΩ.
3.Insulation resistance: ≥100MΩ (DC250V).
4.Withstanding voltage: 250VAC .
5.Operating Force: 160±50gf/250±80gf（依客户需求而定）.
6.Travel:0.4±0.15mm.
7.life test: 10,0000 cycles.

LED COLOR								
1	2	3	4	5	6	7	8	9
Red	Blue	Yellow	Green	White	Orange	Red Blue	Red Green	Red White

NO.	PART NAME	MATERIAL	QTY	FINISHING
7	CAP	PC	1	透明
6	LED		1	
5	TERMINAL	BRASS	4	Ag-PLATED
4	SPRING PLATE	PHOSPHOR BRONZE	1	Ag-PLATED
3	BUTTON	PA66	1	
2	DIFFUSER	PC	1	WHITE
1	HOUSING	PA66	1	

TOLERANCE UNLESS SPECIFIED
<1.5: ±0.1mm
>1.5~5.0: ±0.25mm
>5.0: ±0.3mm
ANGULAR ±1°

NO	DATE	REVISIONS	BY	APPD
A0	2024.8.5	首次发行	BY	

TITLE: TACT SWITCH
MODEL: TC-1194B-G-E-C17A-01
UNIT : MM
SCALE: 1:1
ROHS COMPLIANT
DWN
CHK'D
APPD
PRO.AGL:
REV :A0

DONGGUANG HAOYU ELECTRONICS CO., LTD
皓宇 HOOYA 东莞市弘皓电子有限公司