
PART NO. AND CH. CODE	R_1	R_2	W_1	W_2	WIRE SIZE (mm^2)	WIRE DIAMETER	
						UNSEALED	SEALED
7114-4720-02	0.30	0.80	1.70	2.80	0.35	φ 1.10 ~ 1.70	φ 1.40 ~ 1.70
7114-4721-02	0.40	0.90	2.10	3.30	0.5 ~ 0.75	φ 1.40 ~ 2.20	φ 1.40 ~ 2.20

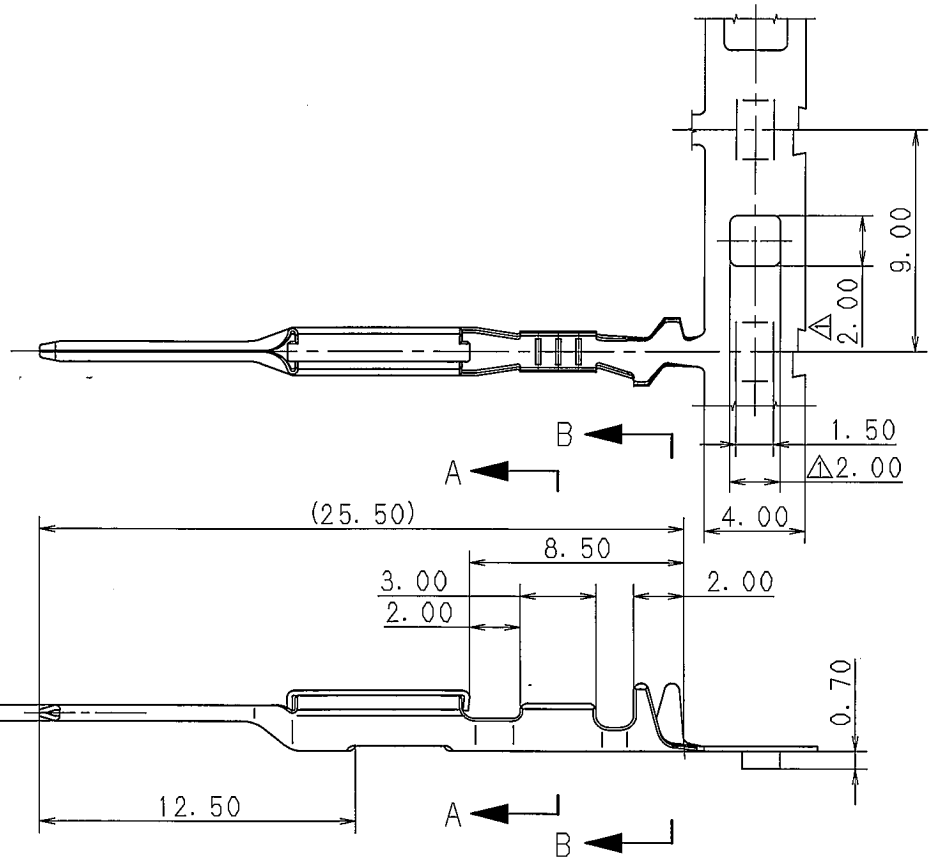


注記


1. 嵌合相手端子品番 :7116-4720-02 ETC.

NOTES

1. MATING PART NO. :7116-4720-02 ETC.



SEC. A-A



SEC. B-B

LET	DATE	REVISION RECORD	NO.	CHKD
△	01.10.02	REVISED DIMENSION	C01-X984	N.S
	01.03.30	NEW	C01-X348	N.S

GENERAL TOLERANCE

	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30′	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30′	0.1
Ⓒ	±0.3	±0.5	±0.8	±1.4	±2	±30′	0.15

SPECIFIED

MASS g

CUSTOMER

CUSTOMER PART NO. | CUSTOMER DWG NO.

OFFICE | TRIAL PART NO.

VENDOR

VENDOR NO.

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	01.03.30	mm	5/1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
Y. Ishida	M. Kashiyama	N. Sugie	N. SUGIE	ISHIJIMA
01.10.10	'01.10.02	'01.10.9	00.12.07	01.10.02

MATL. C2600 (t=0.20) | TREAT. & FIN.

SPEC. TIN PLATING

NAME 0.64 SYSTEM CONNECTOR MALE TERMINAL

PART NO. CH. CODE 7114-4720-02 ETC.

DWG NO. 7114-4720-02 : R | SET DWG NO.

YAZAKI CORPORATION

ISSUE MARK