



Schematic:

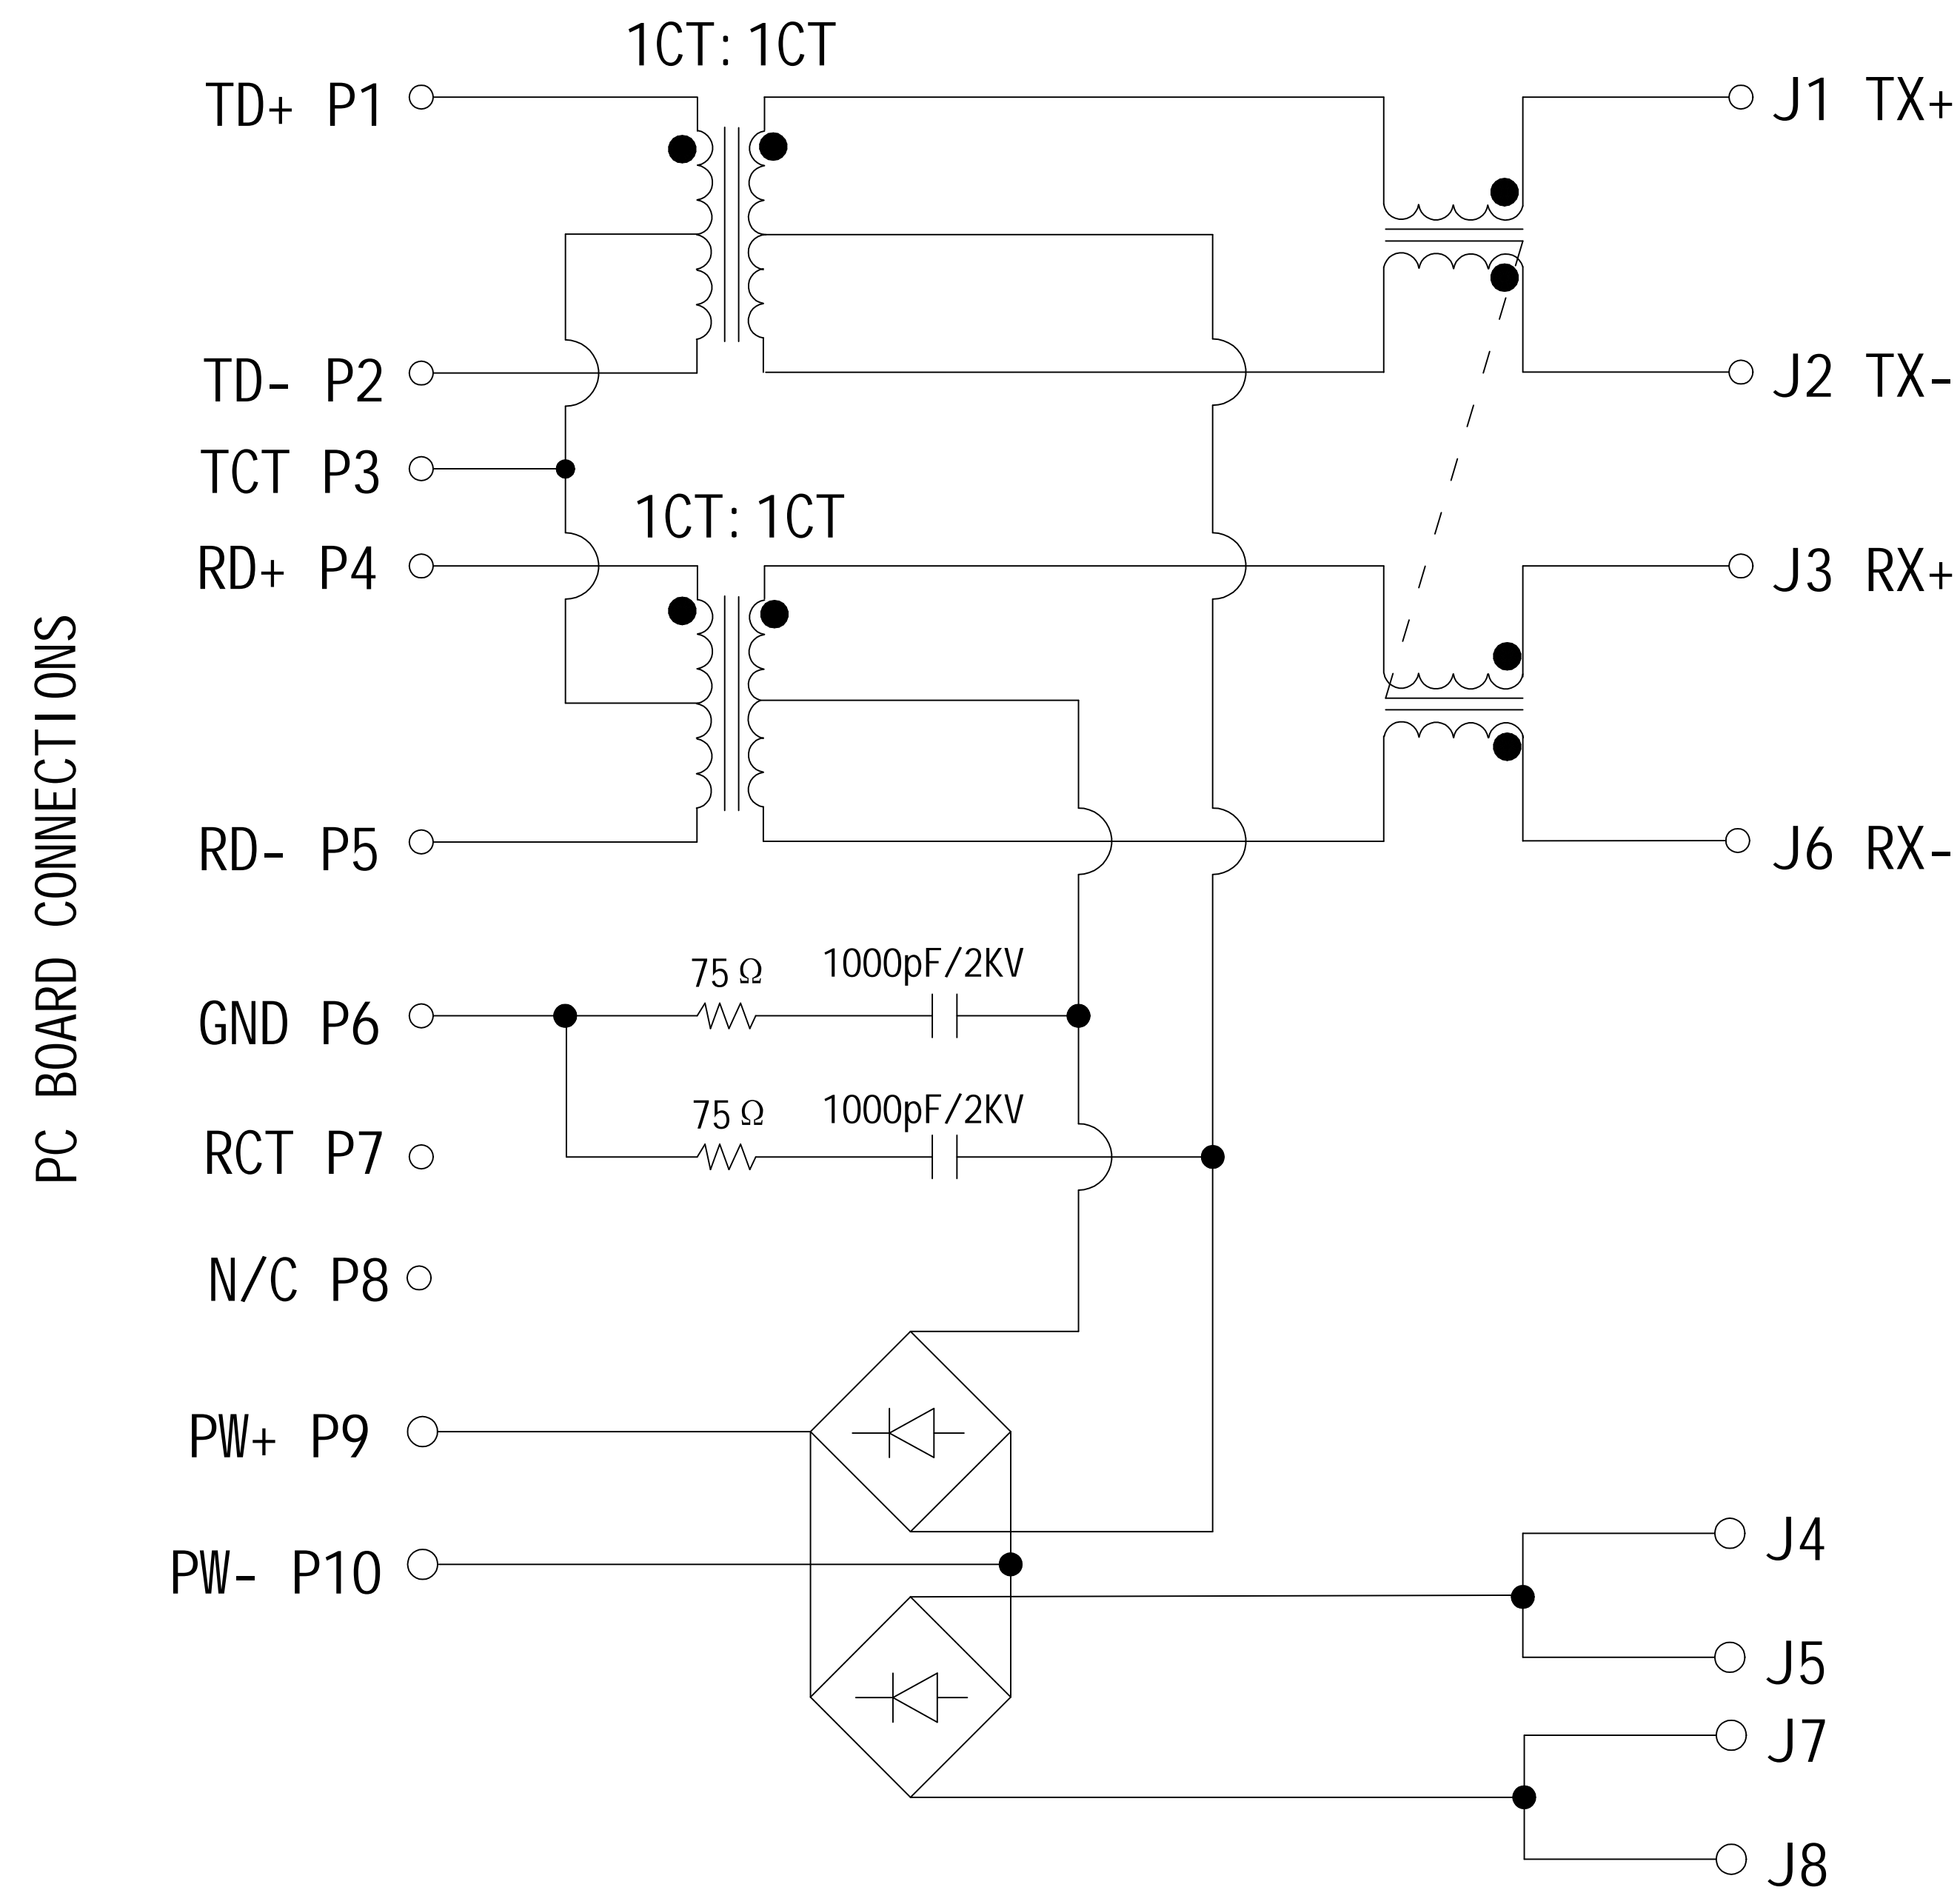


REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2016-07-09	

ELECTRICAL SPECIFICATIONS @25°C

- Turn Ratio : 1CT:1CT ±5%
- OCL: 350uH Min @100KHz, 0.1V, 8mA DC Bias
- Insertion Loss (dB Max):
1-100MHz: -1.2
- Return Loss(dB Min):
1-30MHz: -16 30-60MHz: -12
60-80MHz: -10 80-100MHz: -8
- Cross Talk(dB Min):
1-100MHz: -30
- Common Mode Rejection(dB Min):
1-100MHz: -30
- Balance DC Line current:
350mA MAX, @57VDC Continuous;
- Isolation PHY SIDE To Line SIDE : 1500Vrms
- Operating Temperature Range: 0°C ~ +70°C.

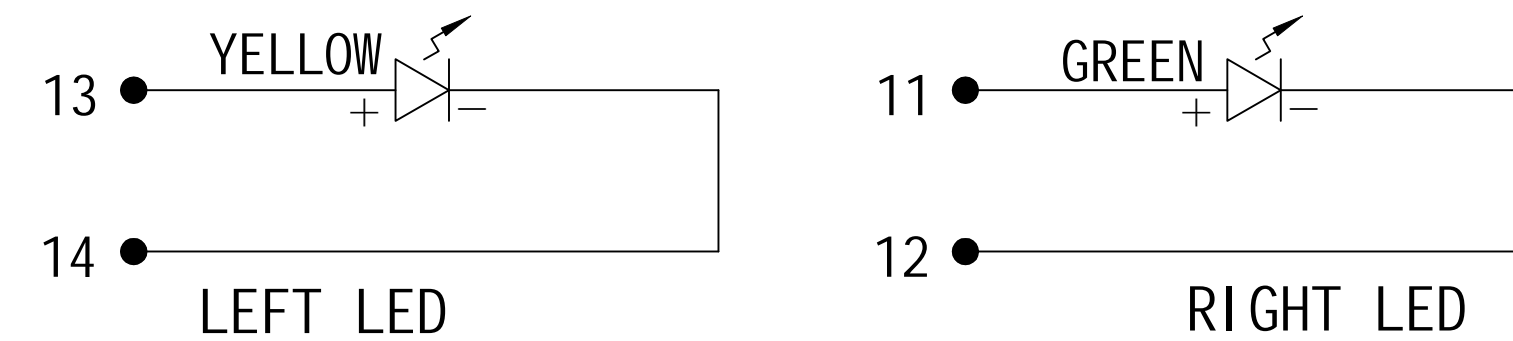




EMITTING COLOR	λ p(nm)	VF @IF=20mA	IR @VR=5V
GREEN	565	1.8~2.6V	10 μ A max
YELLOW	585	1.8~2.6V	10 μ A max

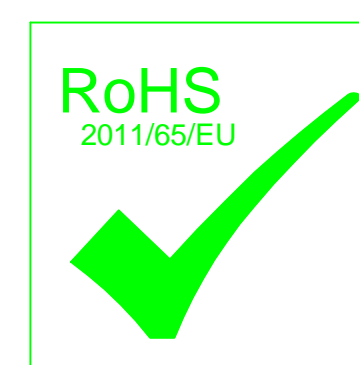

X.X	±0.30	APPD: TOM	LINK-PP INT'L TECHNOLOGY CO., LIMITED	
X.XX	±0.25	CHKD: JAMES	TITLE:	
X.XXX	±0.15	DR: JULY	VERTICAL RJ45 1X1 CONNECTOR WITH 10/100 BASE-T INTEGRATED MAGNETICS FOR POE APPLICATION	
ANGLES	±1°	UNIT: mm	PART NO.:	LPJD1155BDNL
	SCALE: 2/1	SHEET: 1/2	REV: A	DWG NO.: LP14031316

Mechanical :




REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2016-07-09	

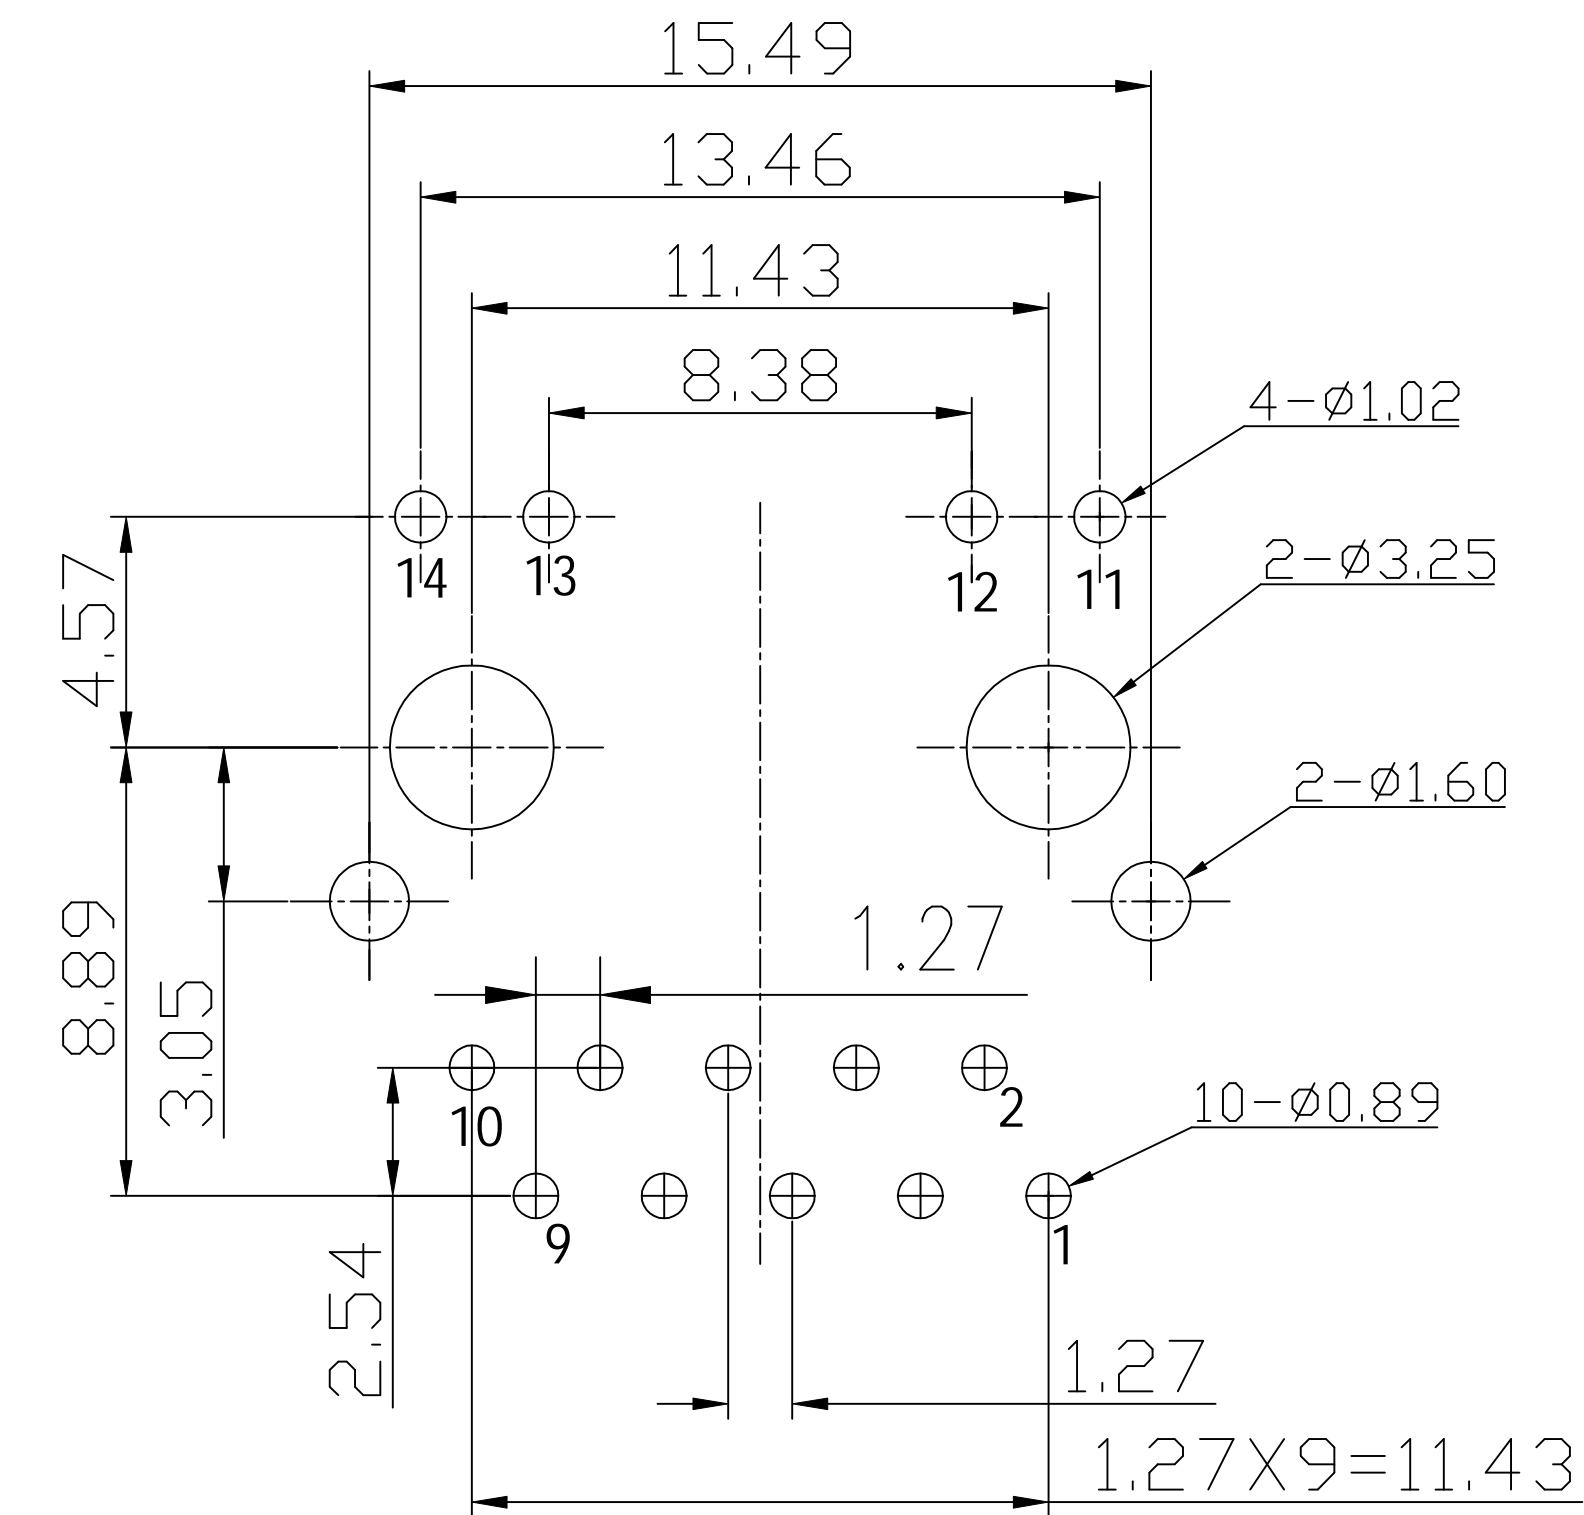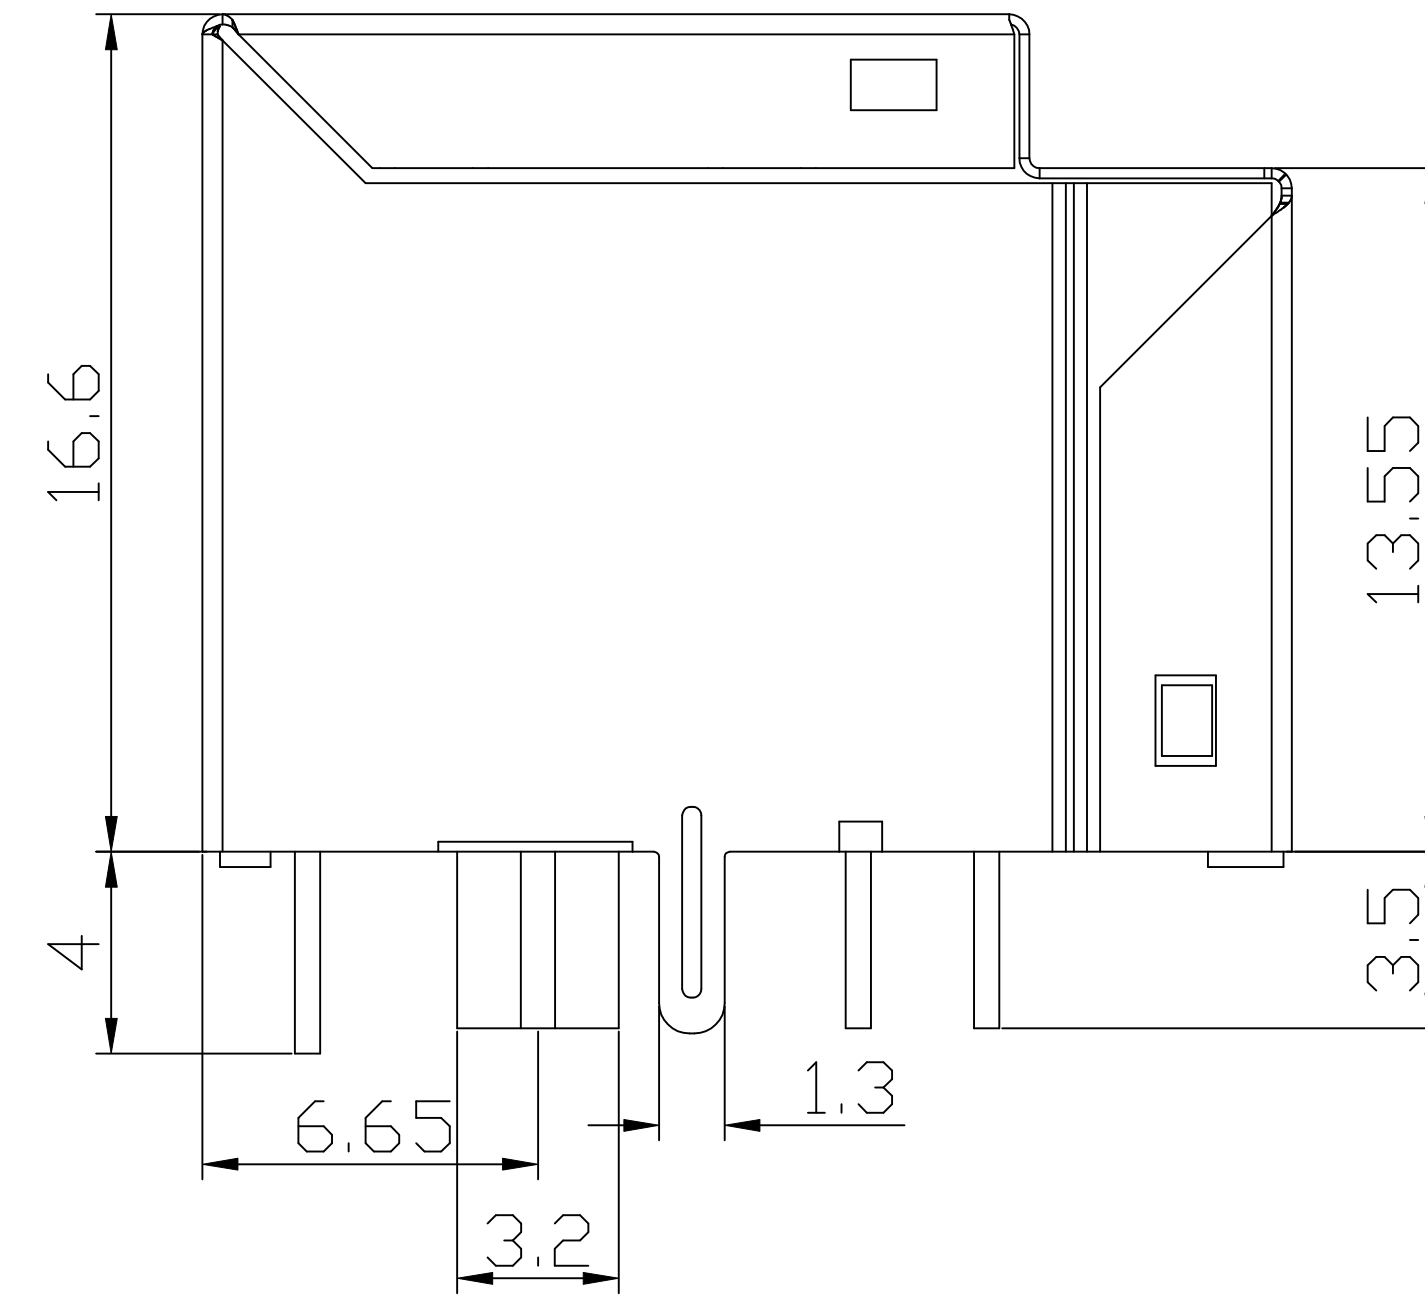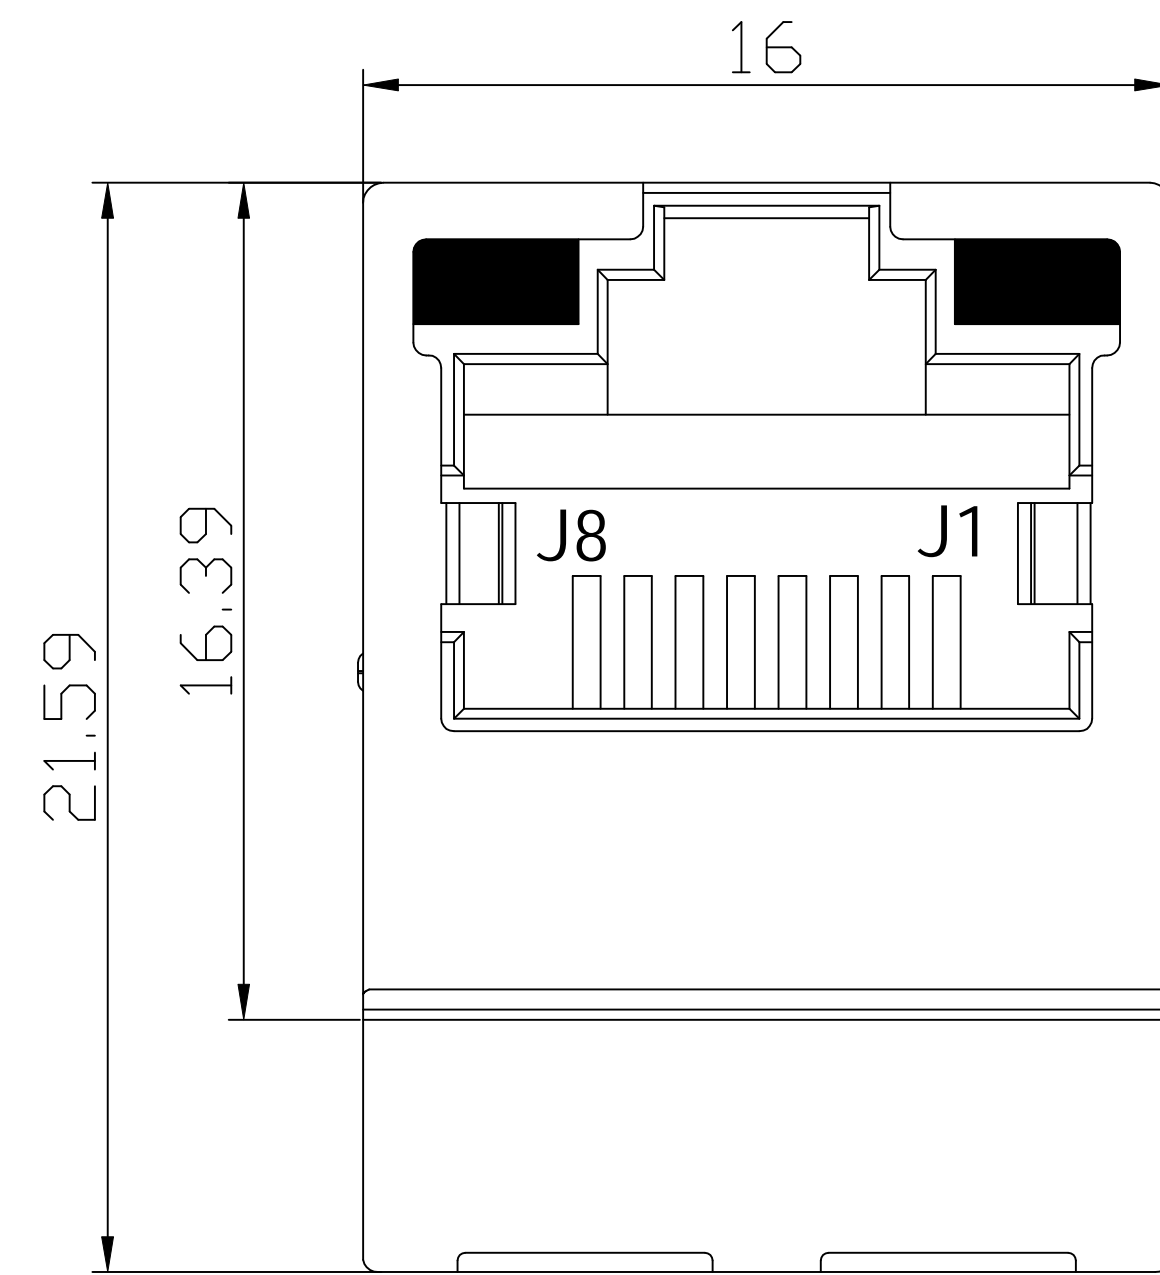

SUGGESTED PCB LAYOUT (TOP VIEW)

NOTES:

1. Designed to support application, such as SOHO(ADSL modems), LAN-on-Motherboard(LOM), hub and Switches.
2. Meets IEEE802.3 specification.
3. Connector Materials:
 Housing: Thermoplastic PBT+30%G. F UL94V-0
 Contact: Phosphor Bronze C5210R-EH Thickness=0.35mm
 Pins: Brass C2680R-H Thickness=0.35mm
 Shield: SUS 304-1/2H Thickness=0.2mm
 Contact plating: Gold 6 micro-inches min. In contact area.
4. Wave solder tip temperature and time: 250°C, 5 Sec.
5. UL Certification: File Number E484635.

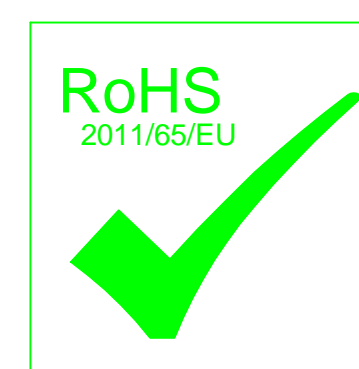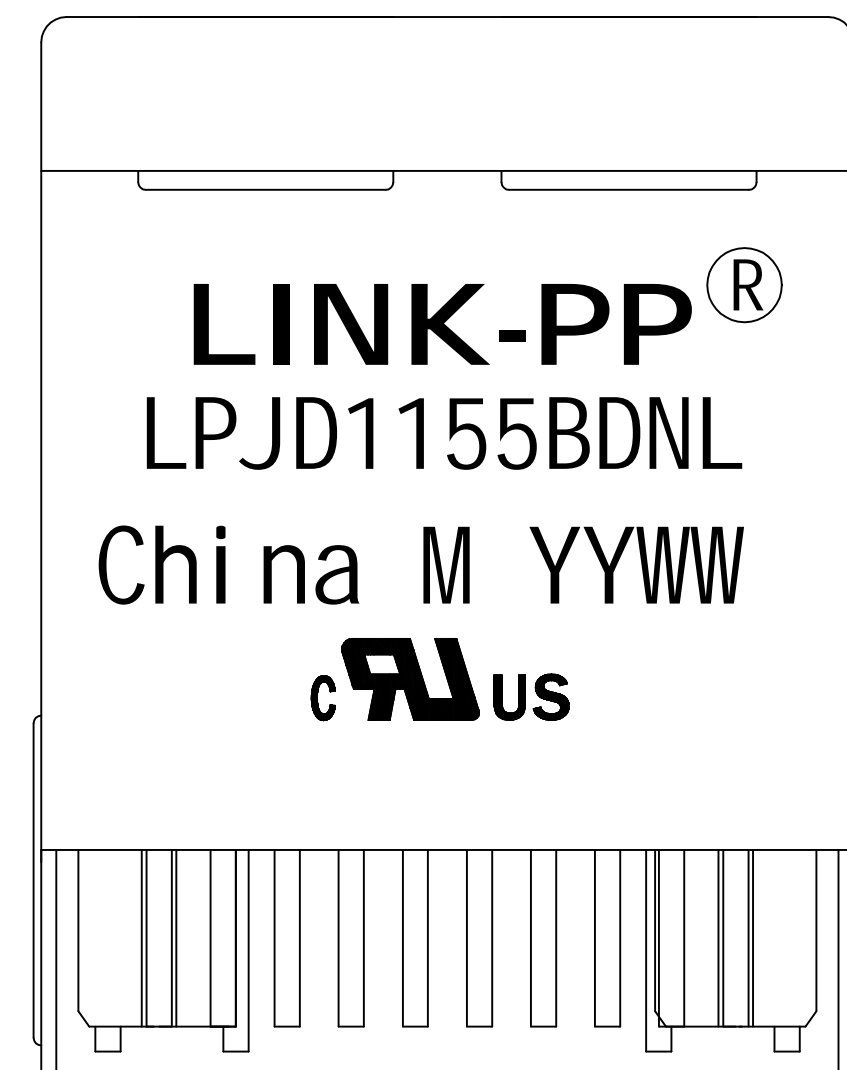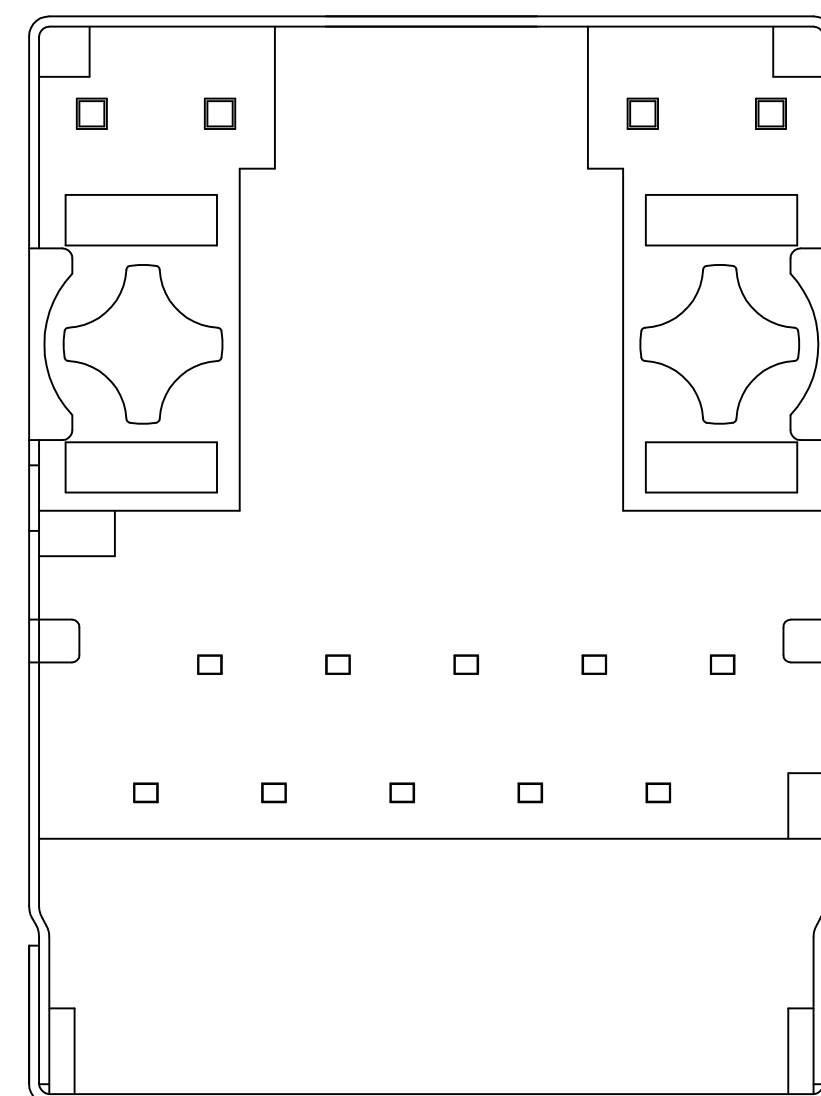

X.X	±0.30	APPD: TOM	LINK-PP INT'L TECHNOLOGY CO., LIMITED
X.XX	±0.25	CHKD: JAMES	TITLE:
X.XXX	±0.15	DR: JULY	VERTICAL RJ45 1X1 CONNECTOR WITH 10/100 BASE-T INTEGRATED MAGNETICS FOR POE APPLICATION
ANGLES	±1°	UNIT: mm	PART NO.: LPJD1155BDNL
	SCALE: 2/1	SHEET: 2/2	REV: A DWG NO.: LP14031316

LINK-PP

Website: <http://www.link-pp.com>

Email: info@link-pp.com

Tel: +86-0752-3322916

Fax: +86-0752-3161926