

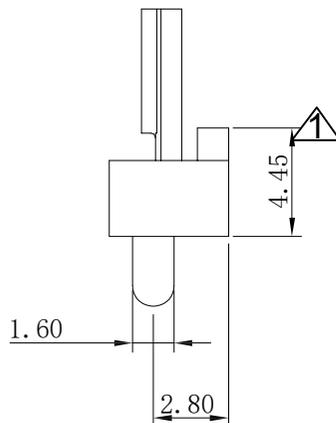
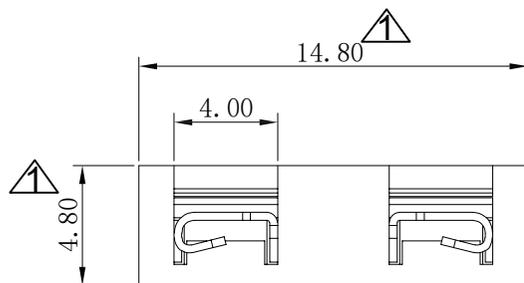


# RoHS


REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.04.17
A2	▲	新开模具更新尺寸	Chen HongJiang	Chen ZhiQiang	2024.10.14

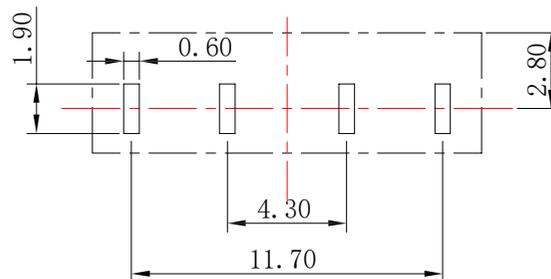

**SPECIFICATIONS**  
 Current Rating: 15 Amps @ 500V AC  
 Temperature Rating: -40 °C to 125 °C  
 Insulator: PBT , UL 94V-0  
 Contacts: Brass,  
 Finish: Tin plated over Nickel  
 Fuse Size: Mini automotive blade Fuses

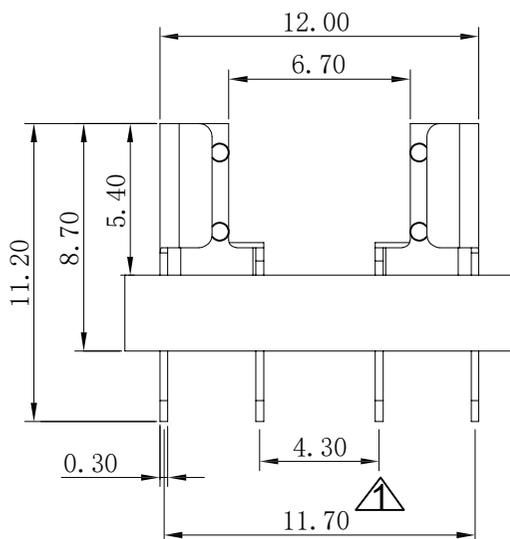

适用线路板 (PCB LAYOUT)

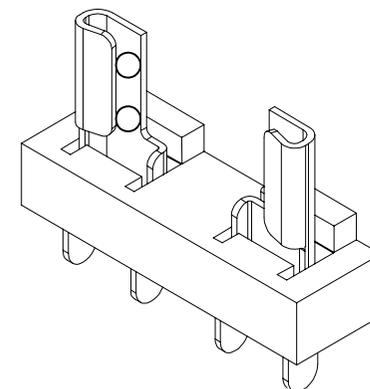

3D REFER TO

X.±0.50	X.°±	PART NO:		XFCN 兴飞连接器		
.X±0.25	.X°±	XF-505P		0769-82001899		
.XX±0.15	.XX°±	TITLE:		www.xfconn.com		
.XXX±0.10	.XXX°±	迷你(微型)汽车保险丝座		DWG NO: /		
UNITS:	mm	APPD	Chen ZhiQiang	VIEW	⊙	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		CHKD	Liu Wei	SCALE	SHEET	
		DRAW	Chen HongJiang	SCALE	REV	
		DATE	2024.07.19	NONE	1/1	A2