

DataSheet No:E05005

Version:V1

Date:2024/06/18



EWWR

Axial Lead Wirewound Resistors

Resistance	0.1Ω~8.2KΩ
Tolerance	±5%
TCR	±250ppm/°C
Rated Power	1W~10W

Applications


Precision Instrumentation
Semiconductor Testing Equipment
Medical Equipment
Capacitor Charging & Discharging

**Better Solution for Sustainable
High End Manufacturing**



Small Size and High Power

High Stability. Non-Flammable Paint Encapsulation

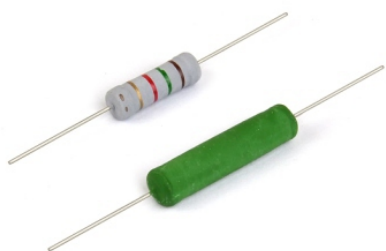

Introduction

EWWR series is an economical axial lead wirewound resistor. The small size of EWWR make circuit design more flexible. Optional power of 1W-10W, resistance range of 0.1 Ω-8.2KΩ, tightest tolerance of ±5% and insulation voltage of 700V. EWWR series is able to operate at relatively high temperatures without damage, with maximum operating temperature range of 155°C. The good heat resistance makes EWWR operate stably within nominal parameters, showing excellent performance in high-temperature environments or applications requiring long-term loads, and high product reliability.

If the standard specifications cannot meet your needs, please contact our sales for consultation. Resi is committed to providing the best precision resistor solutions to meet the needs of customers in instrumentation, semiconductor testing, medical instruments, capacitor charging and discharging, and other fields.




Electrical Parameters

Series	Rated Power	Resistance	Insulation Voltage	TCR	Tolerance
EWWR0001	1W	$0.1\Omega \leq R \leq 510\Omega$	700V	±250ppm/°C	±5%
EWWR0003	3W	$0.1\Omega \leq R \leq 510\Omega$	700V	±250ppm/°C	±5%
EWWR0006	6W	$0.1\Omega \leq R < 5.6K\Omega$	700V	±250ppm/°C	±5%
EWWR0008	8W	$1\Omega \leq R \leq 8.2K\Omega$	700V	±250ppm/°C	±5%
EWWR0010	10W	$1\Omega \leq R \leq 8.2K\Omega$	700V	±250ppm/°C	±5%

Dimensions

Resistor


Unit: mm

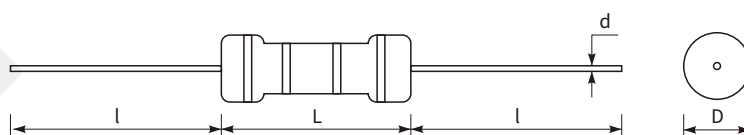

Series	L	D	l	d	Termination	Packaging	Quantity Per Reel	MOQ
EWWR0001	11.0±1.0	4.5±0.5	27±2.0	0.65±0.05	Axial lead	Bulk	100pcs	5000pcs
EWWR0003	15.0±1.0	5.5±0.5	27±2.0	0.75±0.05	Axial lead	Bulk	100pcs	5000pcs
EWWR0006	23.5±1.0	8.0±1.0	27±2.0	0.75±0.05	Axial lead	Bulk	100pcs	1200pcs
EWWR0008	31.5±1.0	9.0±1.0	27±2.0	0.75±0.05	Axial lead	Bulk	50pcs	1200pcs
EWWR0010	36.5±1.0	9.0±1.0	27±2.0	0.75±0.05	Axial lead	Bulk	50pcs	1000pcs

Part Number Information


Example: EWWR0008J1K00T9 (EWWR 8W $\pm 5\%$ 1K Ω ± 250 ppm/ $^{\circ}$ C Standard)

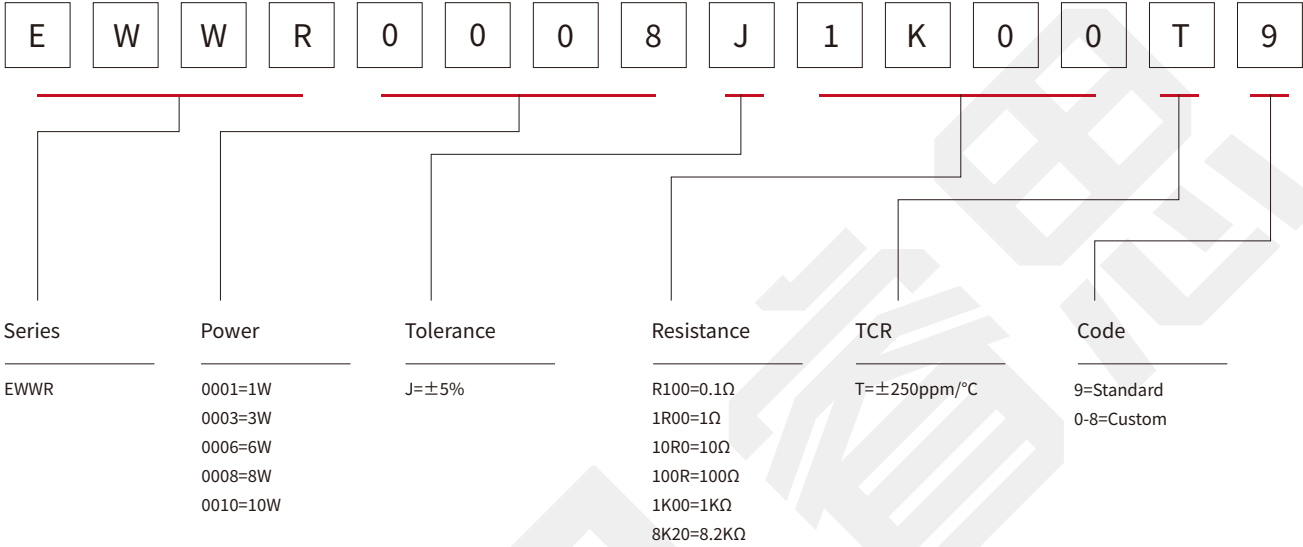


Performance

Test	Test Method	Standards	Test Limits
Short Time Overload	10 times rated power, 5s	IEC 60115-1 4.13	$\Delta R \leq \pm (1.0\% + 0.05\Omega)$
Withstand Voltage	Apply a DC voltage of 100V between the electrode and the substrate for 60s	IEC 60115-1 4.7	No breakdown or flashover
Terminal Strength	Tensile: 10N, 30s, Bending: 5N, 2 cycle, Torsion: 5 cycle	IEC 60115-1 4.16	$\Delta R \leq \pm (1.0\% + 0.05\Omega)$ No visible damage
Vibration	10~55~10Hz/min, Amplitude 1.5mm, 2h in each directions of X Y Z	MIL-STD-202 Method 204	$\Delta R \leq \pm (1.0\% + 0.05\Omega)$ No visible damage
Resistance to Solder Heat	+260 $^{\circ}$ C $\pm 5^{\circ}$ C tin bath for 10s+1s	IEC 60115-1 4.18	$\Delta R \leq \pm (1.0\% + 0.05\Omega)$ No visible damage
Solderability	+245 $^{\circ}$ C+5/-10 $^{\circ}$ C tin bath for 2s+0.5s, immerse 3mm.	IEC 60115-1 4.17	90% minimum coverage
Thermal Shock	-55 $^{\circ}$ C $\pm 3^{\circ}$ C, 30min~room temperature, 2~3min~+125 $^{\circ}$ C $\pm 3^{\circ}$ C, 30min~room temperature, 2~3min, 5 cycle	IEC 60115-1 4.19	$\Delta R \leq \pm (1.0\% + 0.05\Omega)$ No visible damage
Moisture Resistance	+40 $^{\circ}$ C $\pm 2^{\circ}$ C, 90%~95%RH, 0.1 times rated voltage, 1000h+48/-0h	IEC 60115-1 4.24	$\Delta R \leq \pm (5.0\% + 0.1\Omega)$
Load Life	1000h+48/-0h @ room temperature, rated voltage AC, 1.5h on, 0.5h off	IEC 60115-1 4.25.1	$\Delta R \leq \pm (5.0\% + 0.1\Omega)$


Derating Curve

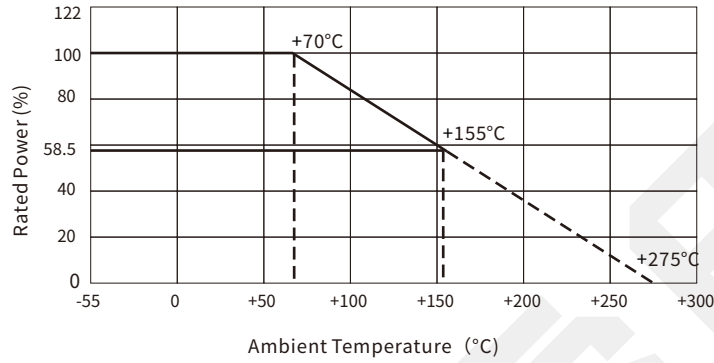


Pulse Power Curve (3W)

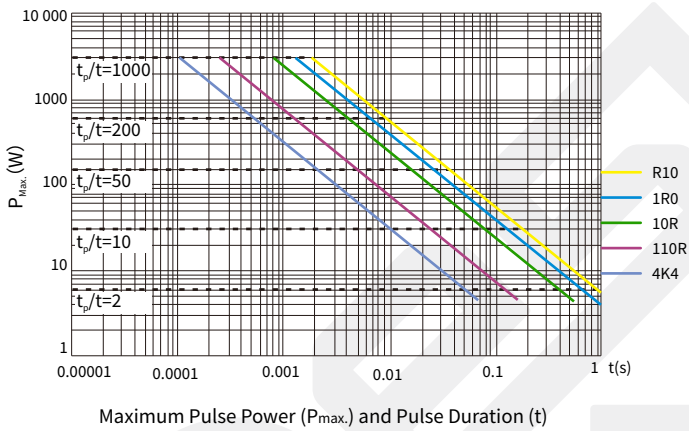

Pulse Power Curve (10W)

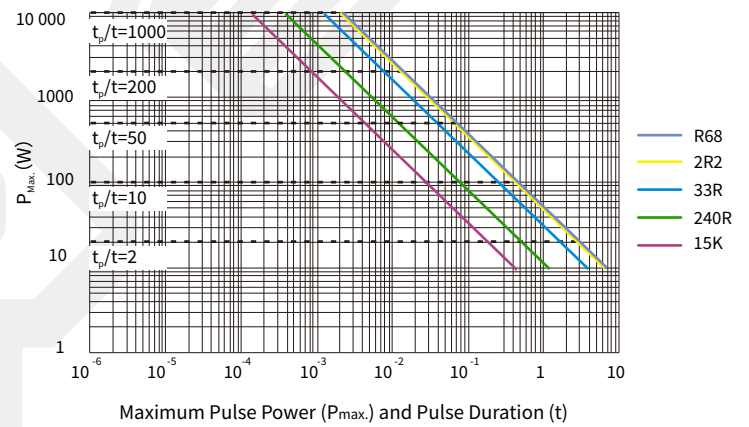

Construction

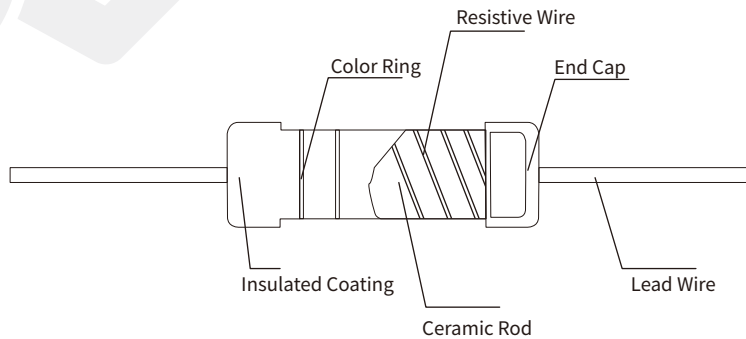

Revision

Version	Revised Content	Date	Approver
V0	Initial Issue	2021.4.28	LFY
V1	<ol style="list-style-type: none">1. Change datasheet to the new template2. Add Construction Diagram3. Add MOQ	2024.6.18	LFY

Disclaimer

All products, datasheets and data can be changed without prior notice.

C&B Electronics Shenzhen CO., LTD., its affiliates, distributors, employees, and any other person acting on its behalf (collectively referred to as "C&B Electronics") shall not bear any legal responsibility for any errors, inaccuracies, or incompleteness of information related to the product disclosed under this agreement or other disclosures.

Product datasheet does not constitute an extension or revision of the purchase terms and conditions in C&B Electronics, including but not limited to the warranties under this agreement.

Unless specified in the purchase terms and conditions, C&B Electronics makes no guarantees, representations or warranties.

To the maximum extent permitted by applicable laws, C&B Electronics hereby makes the following disclaimer:

- (1) All liabilities arising from the use of the product;**
- (2) Including but not limited to all liabilities arising from special, indirect or incidental damages;**
- (3) All implied warranties, including warranties of suitability for special purposes, non infringement possibility, and marketability.**

The information provided in the datasheet and parameter tables may vary in different applications, and the performance of the product may change over time. The recommended application instructions for the product are based on C&B Electronics' understanding and experience of typical requirements. Customers are obligated to verify whether the product is suitable for a specific application based on the parameters provided in the datasheet. Before officially installing or using the product, you should ensure that you have obtained the latest version of relevant information, which can be obtained through the website: resistor.today.

The signing of this agreement does not constitute an express, implied or other form of license related to all intellectual property rights of C&B Electronic Products.

Unless explicitly stated, the products listed in this agreement are not applicable to lifesaving or life sustaining products. In the absence of a clear indication, the customer shall bear all risks caused by unauthorized use of the above products and agree to fully compensate C&B Electronics for all losses caused by such sales or use. For written product terms for such special applications, please contact authorized personnel from C&B Electronics to obtain.

The names and markings on the listed products may be trademarks owned by others.