

ST5F-2 小型信号继电器 Miniature Signal Relay

特性 Features

- 2组触点可选 1 sets/2 sets of contacts available
- 高灵敏度可选 High sensitivity optional
- 高切换容量 60W,125V High switching capacity 60W,125V
- DIP 结构与标准 16 脚 IC 插座匹配 The DIP structure matches the standard 16-pin IC socket
- 外形尺寸 Outline dimension: (20.5x10x11.8) mm



典型应用 Application

- 电话相关设备、通信设备、防灾防盗设备 Telephone related equipment, communication equipment, Disaster prevention and anti-theft equipment.

触点参数 Contact Data

触点形式 Contact Arrangement	2C
触点额定 Contact Rating	1A 120VAC 2A 24VDC
最大切换电压 Max. Switching Voltage	240VAC/60VDC
最大切换电流 Max. Switching Current	2A
触点材质 Contact Material	银合金 Ag alloy
接触电阻 Contact Resistance	Max.100mΩ (1A 5VDC)
动作/释放时间 Operate Time/ Release Time	≤8ms/≤4ms
最小切换负载 Min. switching load	10mA 5VDC
电耐久性 Electrical Endurance	1*10 ⁵ ops.(最大转换频率: 1800次/小时 Maximum conversion frequency: 1800 times/hour)
机械耐久性 Mechanical Endurance	1*10 ⁷ ops.(最大转换频率: 18000次/小时 Maximum conversion frequency: 18000 times/hour)
最大切换功率 Max. Switching Power	120VA/60W

线圈参数 Coil Data (标准型 Standard)

线圈电压范围 Coil Voltage Range	3~24 VDC
容许最大电压 Max. Continuous	额定电压的170% 170% of Rated Voltage
额定线圈功率 Coil Rating Power	0.45W

线圈参数 Coil Data (灵敏型 Sensitivity)

线圈电压范围 Coil Voltage Range	3~24 VDC
容许最大电压 Max. Continuous	额定电压的170% 170% of Rated Voltage
额定线圈功率 Coil Rating Power	0.36W

性能参数 Characteristics

绝缘电阻 Insulation Resistance		1000MΩ Min (at 500VDC)
介质耐压 Dielectric Strength	断开触点间 Between Open Contacts	600Vrms 1min(0.15W/0.2W) 2100Vrms 1min(0.36W/0.45W)
	线圈与触点间 Between Coil and Contact	1000Vrms 1min
温度范围 Temperature Range		-40~+85°C
湿度 Ambient Operating Humidity		40%~85%RH
振动 Vibration Resistance		10Hz-55Hz, at double amplitude 1.5mm 频率 10Hz-55Hz, 双振幅 1.5mm
冲击 Shock	稳定性 Functional	10G
	强度 Destructive	50G
重量 Weight		Approx.5g

线圈规格 Coil Voltage Specifications (标准型 Standard)

额定电压 Nominal Coil VDC	动作电压 Must Operate VDC	释放电压 Release Coil VDC	线圈电阻 Coil Resistance Ω(±10%)
3	2.25	0.3	20
5	3.75	0.5	56
6	4.5	0.6	80
9	6.75	0.9	180
12	9.0	1.2	320
18	13.5	1.8	720
24	18.0	2.4	1280

线圈规格 Coil Voltage Specifications (灵敏型 Sensitivity)

额定电压 Nominal Coil VDC	动作电压 Must Operate VDC	释放电压 Release Coil VDC	线圈电阻 Coil Resistance Ω(±10%)
3	2.25	0.3	25
5	3.75	0.5	69
6	4.5	0.6	100
9	6.75	0.9	225
12	9.0	1.2	400
18	13.5	1.8	900
24	18.0	2.4	1600

ST5F-2 小型信号继电器 Miniature Signal Relay

线圈参数 Coil Data (高灵敏型 High-Sensitivity)

线圈电压范围 Coil Voltage Range	3~24 VDC
容许最大电压 Max. Continuous	额定电压的170% 170% of Rated Voltage
额定线圈功率 Coil Rating Power	0.2W

线圈参数 Coil Data (超灵敏型 Ultra Sensitivity)

线圈电压范围 Coil Voltage Range	3~24 VDC
容许最大电压 Max. Continuous	额定电压的170% 170% of Rated Voltage
额定线圈功率 Coil Rating Power	0.15W

注:

- a) 所有数值均为在环境温度+23°C下未预通电的线圈 All the performance data are for coils that are not pre energized at 23°C ambient temperature.

线圈规格 Coil Voltage Specifications (高灵敏型 High-Sensitivity)

额定电压 Nominal Coil VDC	动作电压 Must Operate VDC	释放电压 Release Coil VDC	线圈电阻 Coil Resistance $\Omega(\pm 10\%)$
3	2.25	0.3	45
5	3.75	0.5	125
6	4.5	0.6	180
9	6.75	0.9	405
12	9.0	1.2	720
18	13.5	1.8	1620
24	18.0	2.4	2880

线圈规格 Coil Voltage Specifications (超灵敏型 Ultra Sensitivity)

额定电压 Nominal Coil VDC	动作电压 Must Operate VDC	释放电压 Release Coil VDC	线圈电阻 Coil Resistance $\Omega(\pm 10\%)$
3	2.4	0.15	60
5	4.0	0.25	167
6	4.8	0.3	240
9	7.2	0.45	540
12	9.6	0.60	960

注:


- a) 以上值为初始值 All the performance data are initial values.
b) 线圈电阻是在线圈温度23°C, 公差为±10% Coil resistance is tested at 23°C ambient temperature, ±10% tolerance.

型号命名标准 Model Number Legend

ST5F-2	12	L	S	,XXX
基本型号 Basic Type:				
ST5F-2				
线圈电压 Coil voltage:				
03, 05, 06, 09, 12, 18, 24VDC				
线圈功耗 Coil Power:				
Blank: 0.45W; L: 0.36W; SL: 0.2W; UL: 0.15W				
防护构造 Protective Construction:				
Blank: 耐助焊剂型 Flux Tight; S: 塑料密封型 Sealed				
特殊特性 Special Characteristic:				
Blank: 标准型 Standard; XXX: 客户特殊特性号 Customer Special Feature Number				


外形尺寸、PCB 布局、接线图 Outline Dimensions, PCB Layout, Wiring Diagram (mm)

外形尺寸 Outline Dimensions

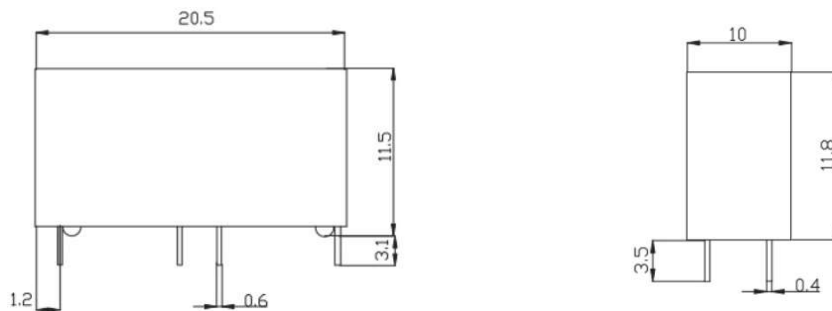


ST5F-2 小型信号继电器 Miniature Signal Relay

◆ 印刷电路板加工尺寸 PCB Outline Dimension Bottom View

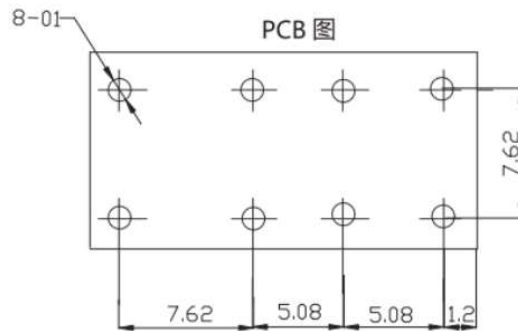

◆ 接线图 Wiring Diagram Bottom View

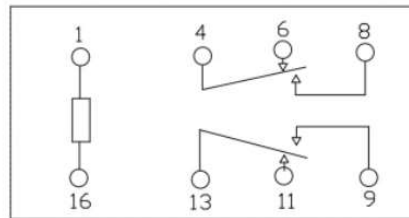

注 Note:

未注尺寸公差 Unspecified tolerance : <1mm: ± 0.2 mm, 1~5 mm: ± 0.3 mm, >5mm: ± 0.5 mm ;

安装孔尺寸中未注尺寸公差为 ± 0.1 mm PC board layout dimensions hadn't specified tolerance is ± 0.1 mm.

免责声明:

本说明书仅供参考。

有关更多信息, 请参阅“术语和指南”。规格如有更改, 恕不另行通知。我们无法评估每个可能应用的所有性能和所有参数。因此, 用户应该在一个正确的位置选择适合自己的产品。如有任何疑问或者需要技术服务, 请联系STEIPU。

Disclaimer:

This manual is for reference only. For more information, see Terms and Guidelines. Specifications are subject to change without notice. We cannot evaluate all performance and all parameters for every possible application. Therefore, users should choose the right product for them in the right place. If you have any questions or need technical services, please contact STEIPU.