REV.	DESCRIPTION	ECN NO.	NAME	DATE

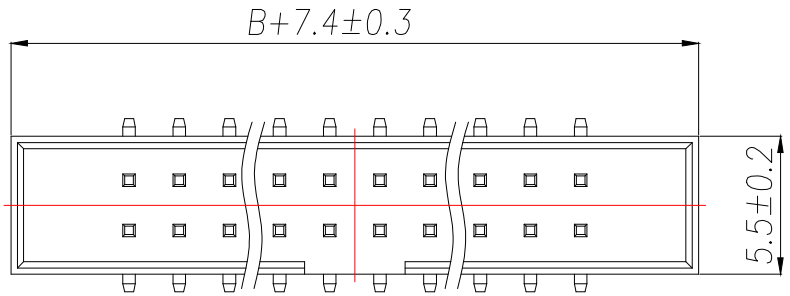

SPECIFICATIONS

Current Rating: 1.5 Amps
Insulation Resistance: 1000MΩ, Min
Contact Resistance: 20mΩ, Max
Withstanding Voltage: AC 500V
Operation Temperature: -40°to+105°
Contact Material: Brass
Standard: PA6T
Insrlator Material: Polyester(UL 94V-0)
Contact Plating: Gold Flash
Max.Processing Temp: 240°C for30-60seconds
(260°C for5seconds)

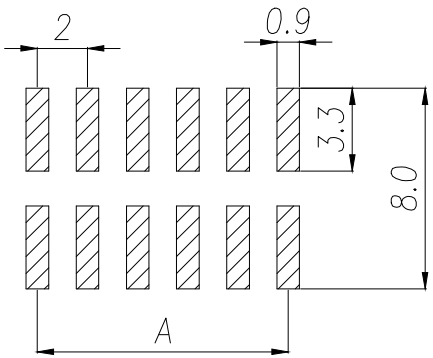

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE:±0.05 (TOP VIEW)

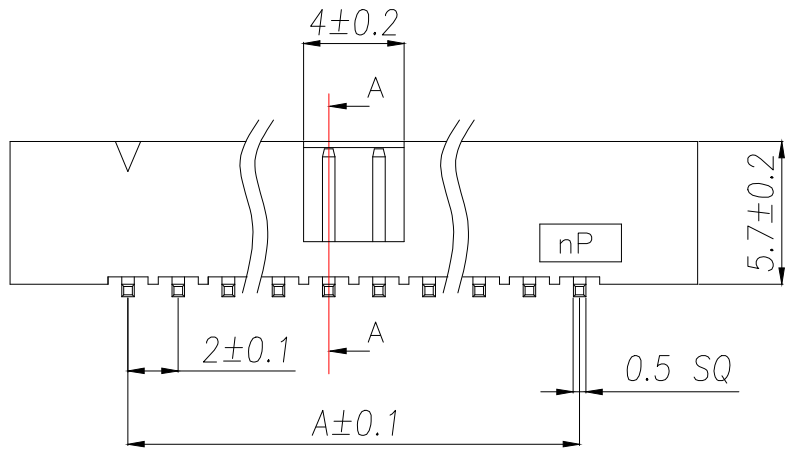



A-A

P/N	PIN	DIM.A	DIM.B
2.0JN-2-03-W	2×3	4.00	6.00
2.0JN-2-04-W	2×4	6.00	8.00
2.0JN-2-05-W	2×5	8.00	10.00
2.0JN-2-06-W	2×6	10.00	12.00
2.0JN-2-07-W	2×7	12.00	14.00
2.0JN-2-08-W	2×8	14.00	16.00
2.0JN-2-09-W	2×9	16.00	18.00
2.0JN-2-10-W	2×10	18.00	20.00
2.0JN-2-11-W	2×11	20.00	22.00
.....	....	.....	.....
2.0JN-2-35-W	2×35	PIN-2.00	PIN

GENERAL TOLERANCE

DIM.	TOL.
x.	±0.30
x.x	±0.20
x.xx	±0.10
GENERAL ANGLE:	
X°	±5°
X.X°	±1°
X.XX°	±0.5°

DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD

BXCONN®

TITLE: 2.0DC3-nPin H5.7 SMT PC6.9 PB6.2 L8.0 6T

DWG. NO.: 2.0JN-2-X-W | CHECKED: MAX

PART NO.: 2.0JN-2-X-W | DRAWN: ELLA

UNIT:	SCALE:	SHEET:	DWG. SIZE:	LAYER:	APPROVED:
mm	none	1of 1	A4	bxconn	WILL