



Shaoxing Yuli Semiconductor CO., LTD

绍兴宇力半导体有限公司



U6213 Data Sheet

V 1.2

版权归绍兴宇力半导体有限公司

Features

- Input voltage: 2.5V~6.5V
- Output range: 1.0V~3.6V
(customized by every 0.1V step)
- Maximum output current: 300mA @
VIN-VOUT=0.5V
- PSRR: 75dB @1KHz
- Dropout voltage: 220mV @ IOUT=200mA
- Quiescent current: 50μA Typ.
- Shut-down current: <1μA
- Recommend capacitor: 1μF
- Ultra Low Output Noise: 20μVRMS

Applications

- MP3/MP4 Players
- Cellphones, radiophone, digital cameras
- Bluetooth, wireless handsets
- Others portable electronics device

General Description

The U6213 is a high accuracy, low noise, high speed, low dropout CMOS Linear regulator with high ripple rejection and fast discharge function. The devices offer a new level of cost effective performance in cellular phones, laptop and notebook computers, and other portable devices.

U6213 can provide product selections of output value in the range of 1.0V~3.6V by every

0.1V step.

The current limiter's fold-back circuit also operates as a short circuit protection and an output current limiter at the output pin.

The U6213 regulators are available in standard SOT23-5L packages.


Standard products are Pb-free and Halogen-free.

Selection Table

Part No.	Package	Temperature	Tape & Reel
U6213-X.XV	SOT23-5L	-40 ~ +105℃	3000/REEL


Note: X.XV indicates 1.0V~3.3V by 0.1V step. For example, 3.3V means product outputs 3.3V

Block Diagram

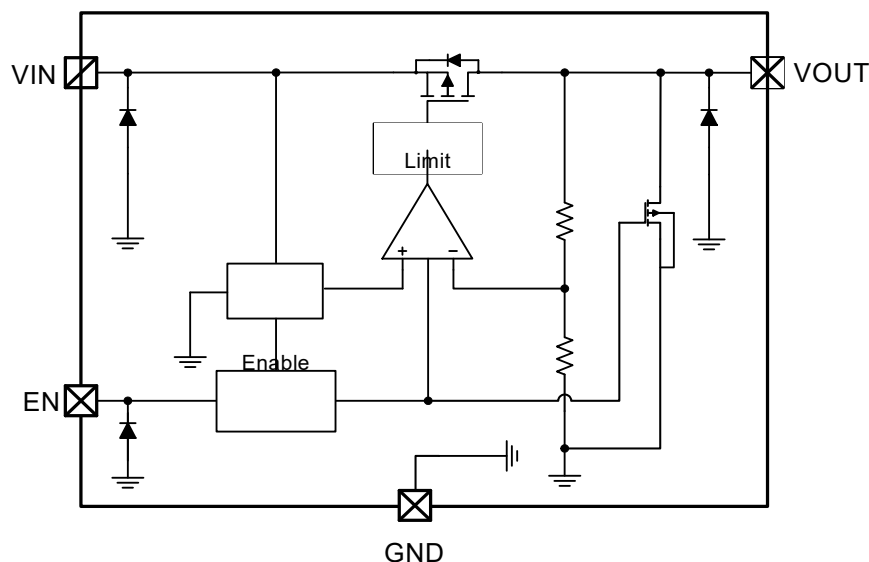

Pin Assignment

SOT23-5 (Top View)



PIN NO	SYMBOL	I/O	DESCRIPTION
SOT23-5L			
1	VIN	Power	Input
2	GND	Ground	Ground
3	EN	I	Enable(Active high, not floating)
4	NC	/	Not connected
5	VOUT	O	Output

Mark : ① ② ③ ④

① Represents product series

Mark	Product Series
L	U6213

② Represents type of regulator

Mark		Product series
Vout:0.1~3.3V	Vout:3.4~6.0V	
V	A	U6213

③ Represents output Voltage

Mark	Output Voltage(V)		Mark	Output Voltage(V)	
0	-	3.1	F	1.6	4.6
1	-	3.2	H	1.7	4.7
2	-	3.3	K	1.8	4.8
3	-	3.4	L	1.9	4.9
4	-	3.5	M	2.0	5.0
5	-	3.6	N	2.1	-
6	-	3.7	P	2.2	-
7	-	3.8	R	2.3	-
8	0.9	3.9	S	2.4	-
9	1.0	4.0	T	2.5	-
A	1.1	4.1	U	2.6	-
B	1.2	4.2	V	2.7	-
C	1.3	4.3	X	2.8	-
D	1.4	4.4	Y	2.9	-
E	1.5	4.5	Z	3.0	-

④ Represents production lot number

0 to 9, A to Z reverse character of 0 to 9, A to Z repeated (G, I, O, Q, W excepted)

Absolute Maximum Ratings

Input Voltage.....-0.3V to 8V Storage Temperature-55°C to 150°C
 Output Current.....300mA Package Lead Soldering Temperature.....260°C
 Operating Temperature-40°C to 105°C Junction Temperature..... -40°C to 125°C
 Ambient Temperature.....-40°C to 105°C

Note: These are stress ratings only. Stresses exceeding the range specified under “Absolute Maximum Ratings” may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

Thermal Information

Symbol	Parameter	Package	Max.	Unit
θ_{JA}	Thermal Resistance (Junction to Ambient) (Assume no ambient airflow, no heat sink)	SOT23-5	500	°C/W
P_D	Power Dissipation	SOT23-5	0.30	W

Note: P_D is measured at $T_A = 25^\circ\text{C}$







Electrical Characteristics


The following specifications apply for $V_{OUT}=2.8\text{V}$, $T_A=25^\circ\text{C}$, unless specified otherwise

SYMBOL	ITEMS	CONDITIONS	MIN	TYP	MAX	UNIT
V_{IN}	Input Voltage				6.5	V
V_{OUT}	Output Range	$V_{OUT} < 2\text{V}$, $V_{IN}=2.7\text{V}$, $I_{OUT}=1\text{mA}$	-3	V_{OUT}	3	%
		$V_{OUT} \geq 2\text{V}$, $I_{OUT}=1\text{mA}$	-2	V_{OUT}	2	
I_Q	Quiescent Current	$V_{OUT}=2.8\text{V}$, $I_{OUT}=0$		50		μA
I_{LIMIT}	Current Limit	$V_{IN}=V_{EN}=4.5\text{V}$		300		mA
V_{DROP}	Dropout Voltage	$V_{OUT}=2.8\text{V}$, $I_{OUT}=200\text{mA}$		220	250	mV
		$V_{OUT}=2.8\text{V}$, $I_{OUT}=300\text{mA}$		320	350	
ΔV_{LINE}	Line Regulation	$V_{IN}=2.7\sim 5.5\text{V}$, $I_{OUT}=1\text{mA}$		0.01	0.15	%/V
ΔV_{LOAD}	Load Regulation	$V_{OUT}=2.8\text{V}$, $I_{OUT}=1\sim 300\text{mA}$		40	70	mV
I_{SHORT}	Short Current	$V_{EN}=V_{IN}$, V_{OUT} Short to GND with $1\ \Omega$		80		mA
I_{SHDN}	Shut-down Current	$V_{EN}=0\text{V}$			1	μA
PSRR	Power Supply Rejection Rate	$V_{IN}=5V_{DC}+0.5V_{P-P}$ $F=1\text{KHz}$, $I_{OUT}=10\text{mA}$		75		dB
		$V_{IN}=5V_{DC}+0.5V_{P-P}$ $F=1\text{MHz}$, $I_{OUT}=10\text{mA}$		55		
V_{ENH}	EN logic high voltage	$V_{IN}=5.5\text{V}$, $I_{OUT}=1\text{mA}$	1.4		V_{IN}	V
V_{ENL}	EN logic low voltage	$V_{IN}=5.5\text{V}$, $V_{OUT}=0\text{V}$			0.4	V
I_{EN}	EN Input Current	$V_{EN}=0$ to 5.5V			1	μA
e_{NO}	Output Noise Voltage	10Hz to 100KHz , $C_{OUT}=1\ \mu\text{F}$		20		μV_{RMS}


Typical Performance Characteristics

$C_{IN}=1\mu F$, $C_{OUT}=1\mu F$, $V_{IN}=4.5V$, $V_{OUT}=2.8V$, $T_A=25^\circ C$, unless specified otherwise. (Package:SOT23-5L)

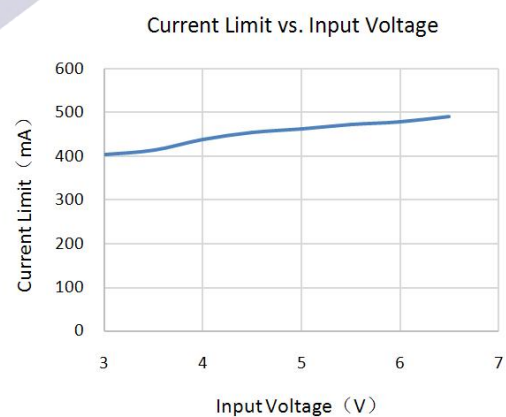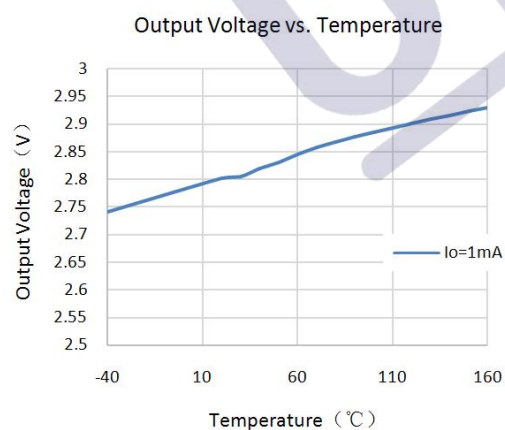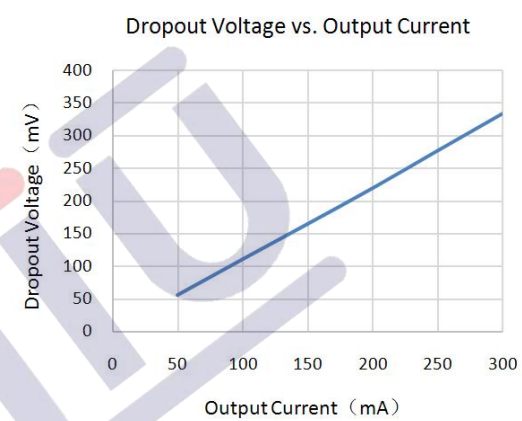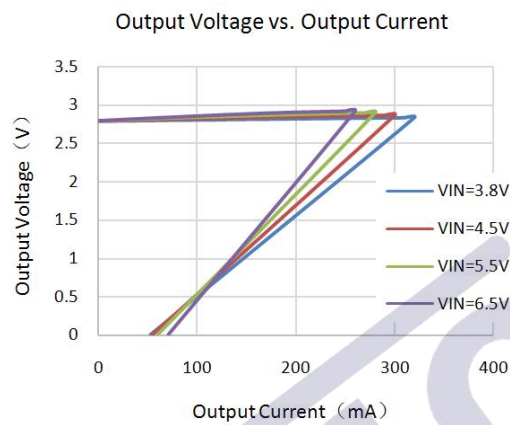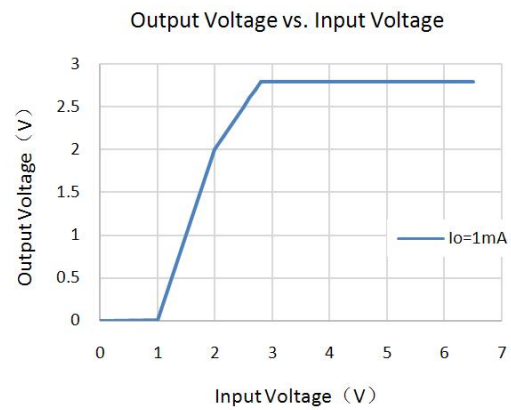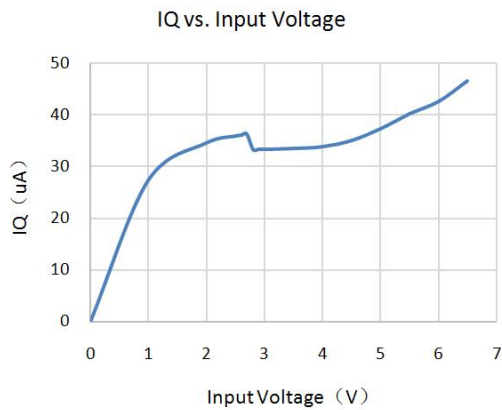


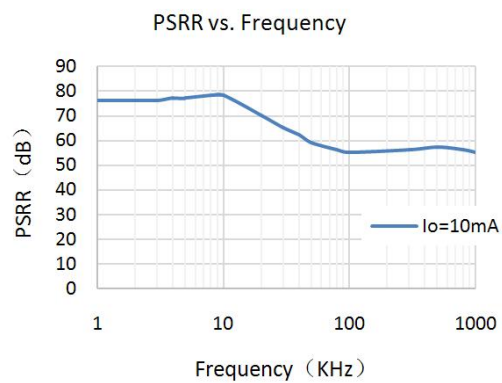


EN ON / OFF

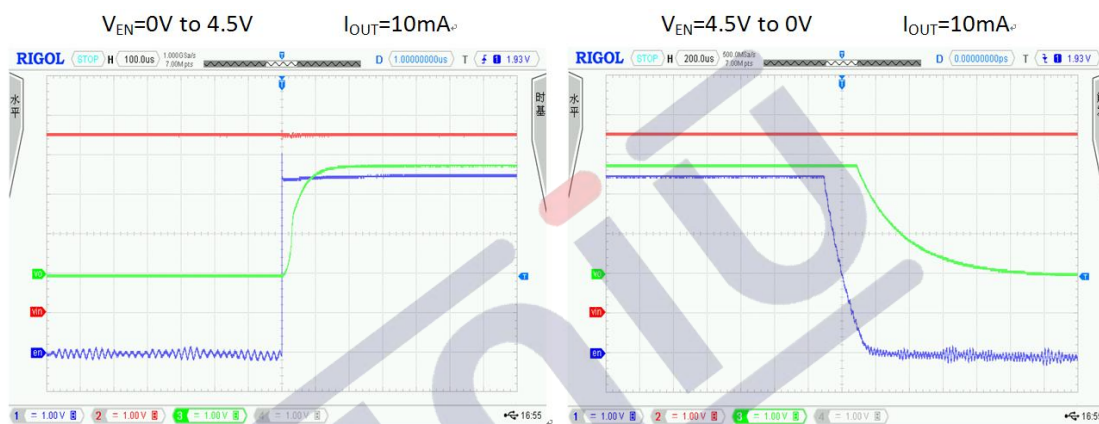

Power ON / OFF

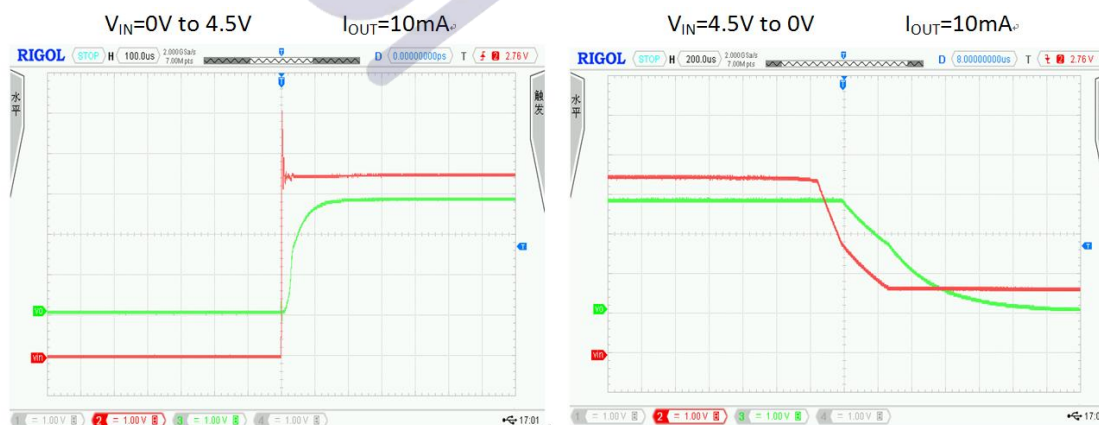


Line Transient

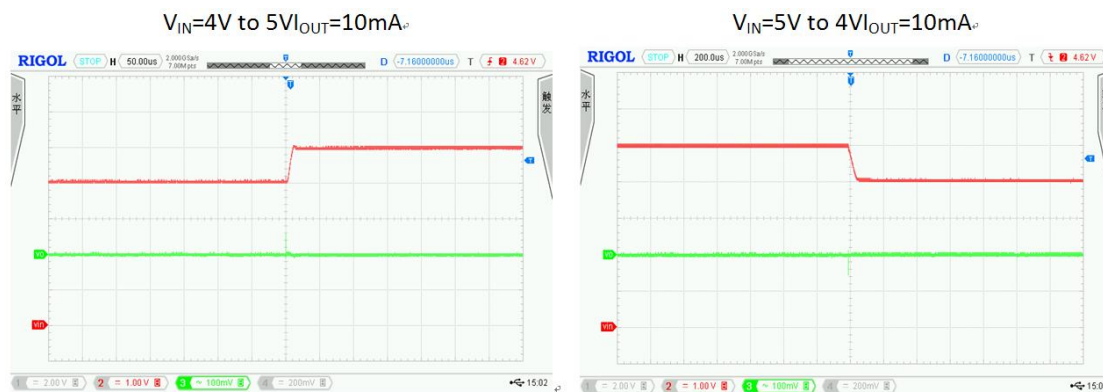

Load Transient



Application Circuits

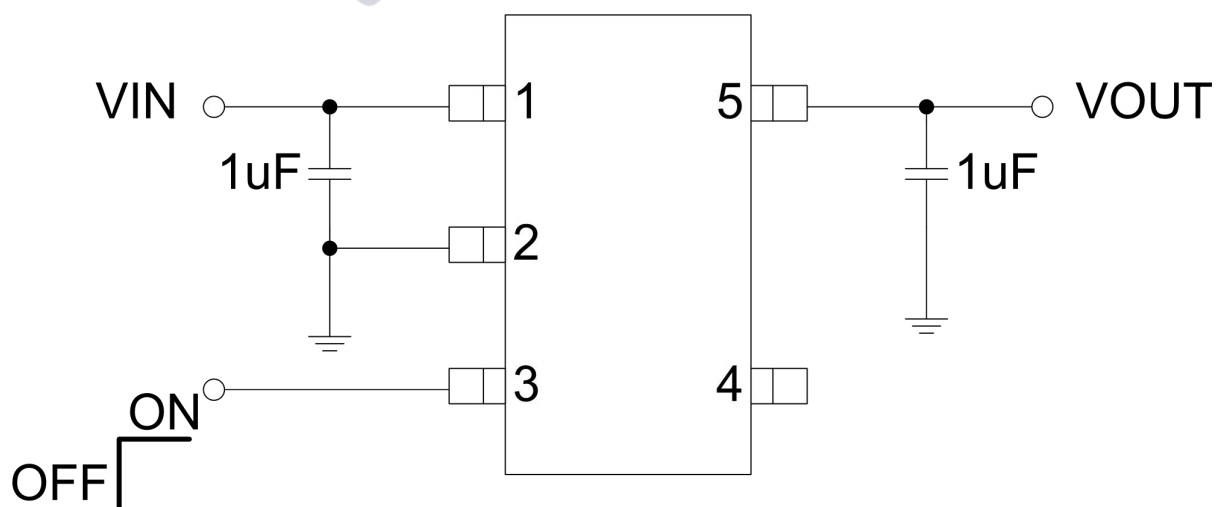

Application Information

INPUT CAPACITOR

An input capacitor of $\geq 1.0\mu\text{F}$ is required between the VIN and GND pin. This capacitor must be located within 1cm distance from VIN pin and connected to a clear ground. A ceramic capacitor is recommended although a good quality tantalum or film may be used at the input. However, a tantalum capacitor can suffer catastrophic failures due to surge current when connected to a low impedance power supply (such as a battery or a very large capacitor).

There is no requirement for the ESR on the input capacitor, but the tolerance and temperature coefficient must be considered in order to ensure the capacitor work within the operation range over the full range of temperature and operating conditions.

OUTPUT CAPACITOR

In applications, it is important to select the output capacitor to keep in stable operation. The output capacitor must meet all the requirements specified in the following recommended capacitor table over all conditions in applications. The minimum capacitance for stability and correct operation is $0.6\mu\text{F}$. The capacitance tolerance should be $\pm 30\%$ or better over the operation temperature range. The recommended capacitor type is X7R to meet the full device temperature specification.

The capacitor application conditions also include DC-bias, frequency and temperature. Unstable operation will result if the capacitance

drops below minimum specified value (see the next section Capacitor Characteristics).

The U6213 is designed to work with very small ceramic output capacitors. A $1.0\mu\text{F}$ capacitor (X7R type) with ESR type between 0 and $400\text{m}\Omega$ is suitable in the applications. X5R capacitors may be used but have a narrow temperature range. With these and other capacitor types (Y5V, Z6U) that may be used, selection relies on the range of operating conditions and temperature range for a specified application. It may also be possible to use tantalum or film capacitors at the output, but these are not as good for reasons of size and cost. It is also recommended that the output capacitor be located within 1cm from the output pin and return to a clean ground wire.


NO-LOAD STABILITY

The U6213 will remain stable and in regulation with no external load. This is especially important in CMOSRAM keep-alive applications.

ON/OFF INPUT OPERATION

The U6213 is turned off by pulling the EN pin low, and turned on by pulling it high. If this function is not used, the VEN pin should be tied to VIN to keep the regulator output on at all time. To assure proper operation, the signal source used to drive the VEN input must be able to swing above and below the specified turn-on/off voltage thresholds listed in the Electrical Characteristics section under VIL and VIH.

Package Information
SOT23-5 Outline Dimensions

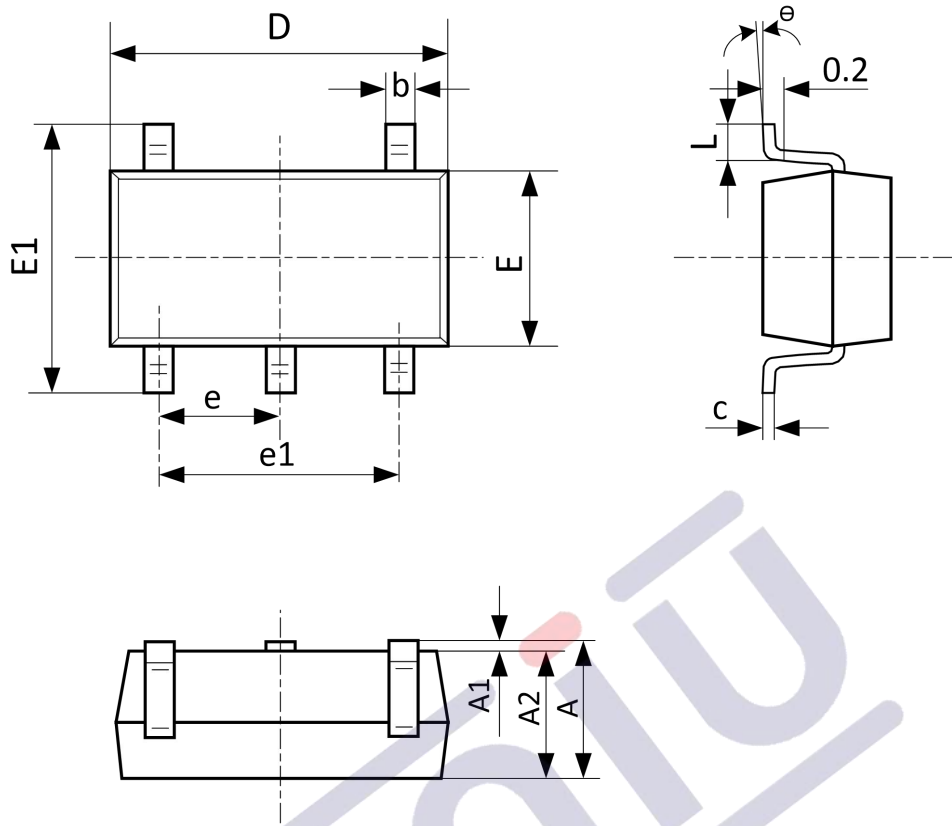

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°C	8°C	0°C	8°C

1、Version Record

Date	Rev.	Description
2019/04/11	1.0	First Release
2022/03/13	1.1	Layout Adjustment
2025/04/10	1.2	Distinguish the Package SOT23-5 DFN1*1-4 and Modify the Label

2、Contact

Shaoxing Yuli Semiconductor CO.,LTD

Shaoxing Address: 4th & 5th Floors, Building 45, CECEP Science and Technology Innovation Park, No. 25 Paodu Road, Doumen Subdistrict, Yuecheng District, Shaoxing City, Zhejiang Province, China

Telephone: 0575-85087896 (R&D Department)

Fax: 0575-88125157

E-mail: htw@uni-semic.com

Wuxi Address: Room 503, Building 1# (Comprehensive Building), China Electronics (Wuxi) Digital Chip City, No. 6 Xianfeng Middle Road, Xishan District, Wuxi City, Jiangsu Province, China

Telephone: 0510-85297939

E-mail: zh@uni-semic.com

Shenzhen Address: Room 410, Yonghui International Business Building, Baoyuan Road, Nanchang Community, Xixiang Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Telephone: 0755-84510976

E-mail: htw@uni-semic.com

Disclaimers:

1. Shaoxing Yuli Semiconductor Co., LTD., (referred to as "Yuli"), reserves the right to modify user manuals, application guidelines, etc., without prior notice. When purchasing, customers should obtain the latest version of our company's materials and verify whether the relevant information is up-to-date and complete. Before using the products, please carefully read the user manuals, application guides, and other relevant materials along with all precautions contained therein.

2. This product is intended for consumer electronics use and Yuli makes no guarantees as to the suitability of Yuli products for any particular purposes. The products must not be applied in any equipment or system whose manufacture, use, or sale is prohibited by applicable laws or regulations. If Yuli's products are utilized in such prohibited devices or systems, all risks associated with such applications shall be solely borne by the customer, and Yuli shall not be held liable for any consequences arising therefrom.

3. The applications of the products described in this document and related materials such as application guides are provided for illustrative reference only. The parameters provided in this document may and do vary in different applications, and the actual performance may change accordingly. Further evaluation, testing, and validation are required during use. Yuli disclaims all responsibility for any assistance provided in the application of its products or the design of customer products.

4. Customers must utilize the products within their valid storage period. If customers have any questions regarding the valid storage period of Yuli's products, please contact Yuli's sales personnel or customer service support immediately. Yuli shall not assume any responsibility for the use of products beyond their storage period.

5. Without the prior written consent of Yuli, the files and products shall not be disassembled, altered, modified, or copied.

6. When purchasing products, please verify the Yuli trademark and product specifications. For any inquiries, please contact Yuli for clarification. Third-party purchasers are advised to confirm whether the seller holds authorized credentials from Yuli and must contact our company prior to procurement to ensure the products are genuine Yuli-manufactured items.

7. When using or applying the products, customers must comply with all applicable laws and regulations, including but not limited to trade control regulations, etc. This product is designated for civilian electronic purposes. It must not be used in non-civilian fields.

8. Product improvement is an endless journey. Our company remains fully committed to delivering superior products to our customers!