
DASH NO.	M CODE	MADE FROM

GSD

7703-1

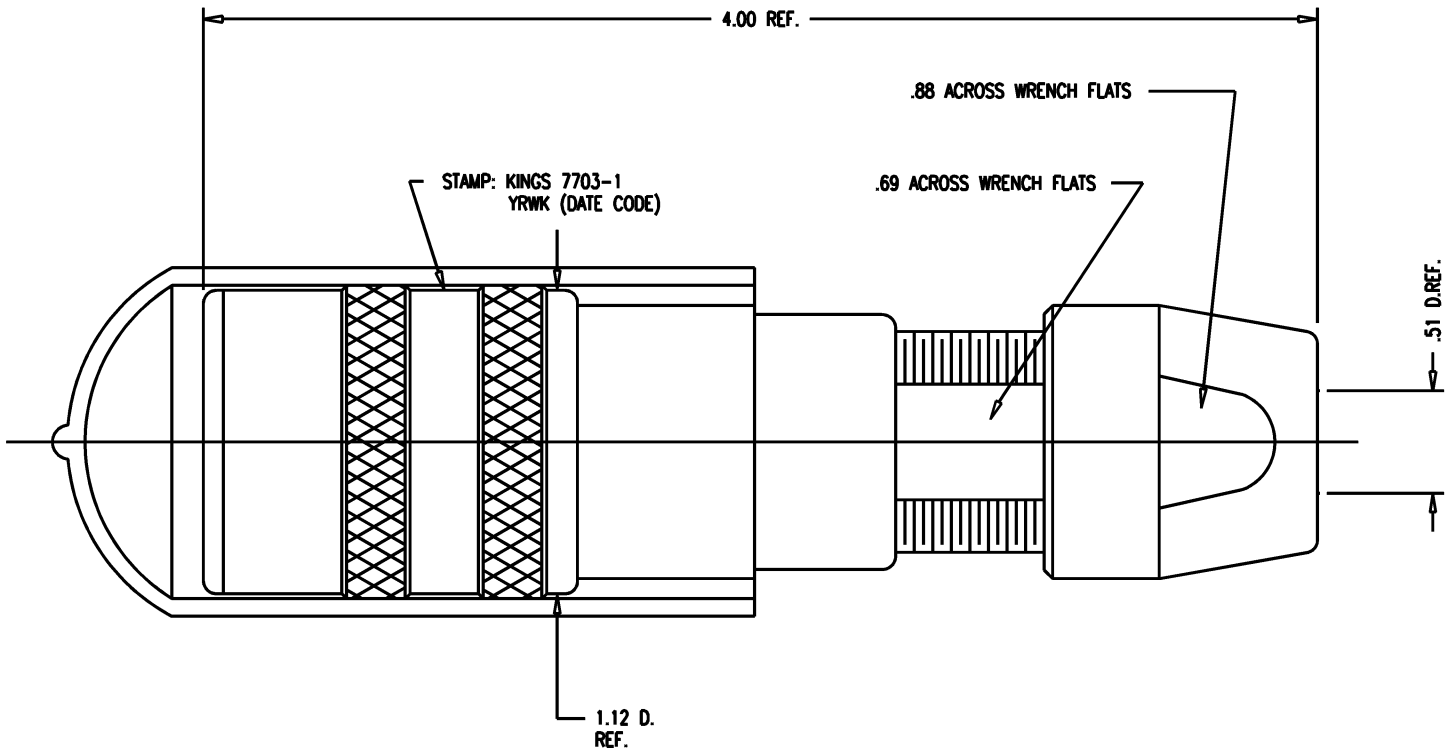

NOTES:
1. FOR USE WITH 700 CABLE GROUP.
2. FOR CABLING INSTRUCTIONS SEE KAI-8010.
3. FOR CABLE TRIMMING USE KTJ-300 AND KTD-300.
4. FOR CRIMPING USE DIE SIZE 2040.
5. MATERIALS:
   INSULATORS-TEFLON, ASTM-D-4894
   GASKETS-SILICONE RUBBER, ZZ-R-765
   CAP-VINYL
   K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM-B-135
   CENTER CONTACT, OUTER CONTACT SPRING, INSERT } BER. COP., ASTM-B-196
   ALL OTHER METAL PARTS-BRASS, ASTM-B16
6. FINISHES:
   CENTER CONTACT, OUTER CONTACT SPRING } GOLD PLATE PER MIL-G-45204
   NUTS, COLLET, BODIES } KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
   ALL OTHER METAL PARTS-SILVER PLATE PER QQ-S-365
7. ELECTRICAL CHARACTERISTICS:
   NOMINAL IMPEDANCE: 75 OHMS
   FREQUENCY RANGE: DC-500 MHZ
   VOLTAGE BREAKDOWN: CENTER CONDUCTOR/INNER GROUND: 1500 VRMS
   INNER GROUND/OUTER GROUND: 500 VRMS

GSD

REVISIONS	
ISSUE	CHANGES
0	ER 35421 KH 04/10/95
1	CN 37238 A KH 02/03/97
2	CN 38583 C BDH 05/24/02

KAM5516

SCALE 2:1

APPROX SURFACE AREA

USED ON

REF: KP-8020-700-400

JK, TRI-LOC,
SERIAL DIGITAL

DRAWN	KH	DATE	04/10/95
DESIGN	DW	DATE	04/11/95
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

7703-1

MAY 2007 THIS DRAWING BECAME THE PROPERTY OF PROPERTY OF
WINCHESTER ELECTRONICS CORPORATION, WALLINGFORD, CT 06492