MRK.	DATE	REVISION	SIGN
△			

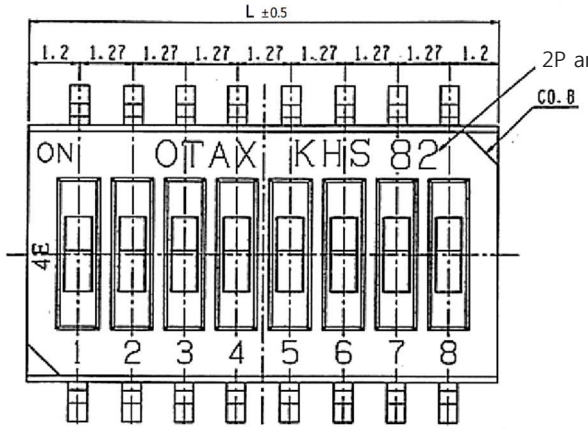

2P and 4P are not displayed.

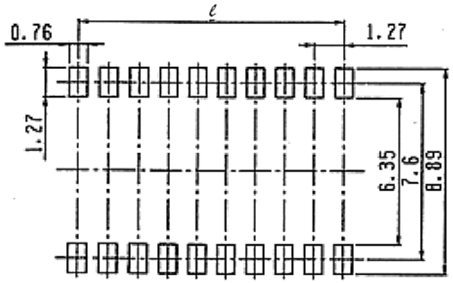

PCB DIMENSION

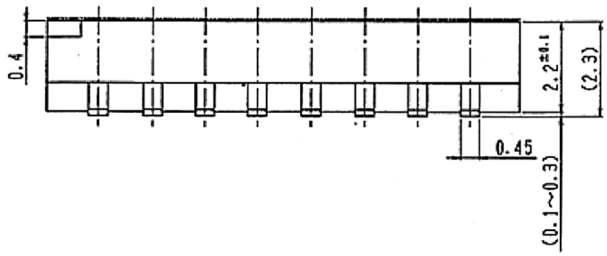

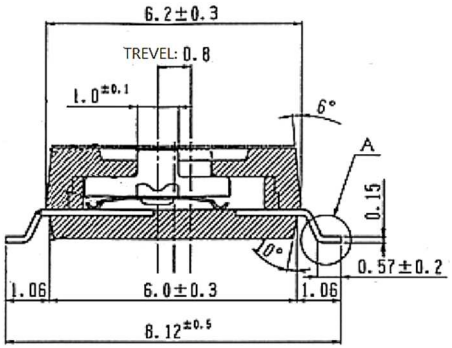



PART A

SPECIFICATION

1. RATING : DC 24V 25mA (Switching)
   DC 50V 100mA (Non-Switching)
2. CONTACT RESISTANCE : 100mΩ MAX. (DC 2V 10mA)
3. INSULATION RESISTANCE : DC 100V 100MΩ MIN.
4. WITHSTAND VOLTAGE : 300V AC 1 minute.
5. LIFE CYCLE : 1,000 CYCLES
6. OPERAING FORCE : 4.9N MAX.

MODEL	POLE	L (mm)	ℓ (mm)
KHS-22C	2	3.67	1.27
KHS-42C	4	6.21	3.81
KHS-62C	6	8.75	6.35
KHS-82C	8	11.29	8.89
KHS-102C	10	13.83	11.43

01	-	-	-	1	-
NO.	DESCRIPTION	MATERIAL	COLOR/FINISH	Q.TY	VENDOR

DRAW/DESIGNED	CHECKED	APPROVED	G.TOL	TITLE	DIP SWITCH	
LEE H.S	ROH J.P	LEE K.J	±0.2			
			UNIT: mm / SCALE: 4:1	MODEL	KHS-XX2C	SHEET
BONSDA SHENZHEN ZIGENG TECHNOLOGY CO.,LTD			SIZE: A4	DRAW NO.	KHS-002C-0T-01	1/1