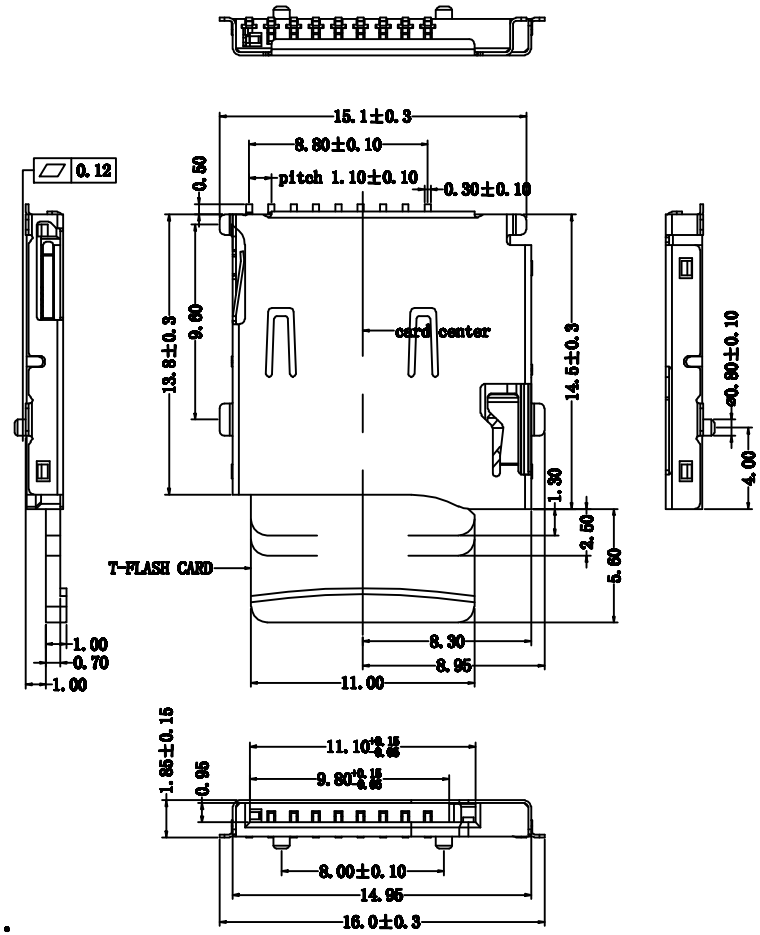

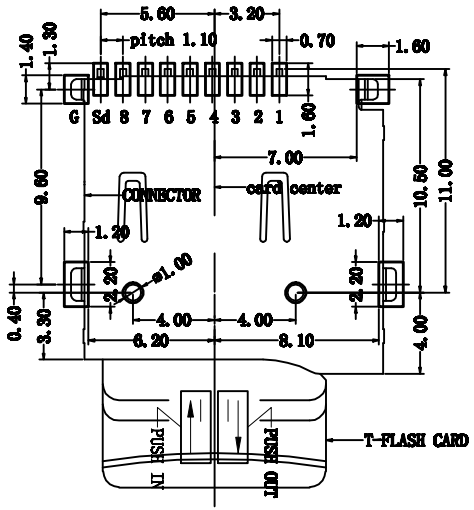

P.C.B LAYOUT
TOLERANCE: ±0.05

Pin#	PIN ASSIGNEMENT
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1
Sd	CARD DETECTION
G	GROUND

DETECT SWITCH:
1. CARD INSERTING POSITION CLOSED
2. NO CARD POSITION OPEN

NOTE:
1. MATERIAL:
HOUSING: HIGH TEMPERATURE THERMO PLASTIC UL94V-O, BLACK.
CONTACTS: COPPER ALLOY
SHELL: SUS
2. FINISHED
CONTACTS: 1U"GOLD PLATED ON CONTACT AREA,
80U"MIN. MATTE-TIN ON SOLDERTALLS
30U" MIN. NICKEL UNDERPLATING OVER ALL
SHIELD: 30U" MIN. NICKEL UNDERPLATING OVER ALL

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRYCO., LTD	
CHECKED:	DATE:	TITLE: MICRO SD(T-FLASH) MEMORY CARD CONNECTOR	
DRAWN: LYF	DATE: 2013-12-29	CLIENT P/N C3025486	
		UNIT mm	SCALE free
		FILE NO. C-TF00M08P-P000	REV. A QY04