




## Thyristor Surge Suppressors - BS8000N-C-F Series

### Features

- Excellent capability of absorbing transient surge
- Quick response to surge voltage (nS Level)
- Eliminates overvoltage caused by fast rising transients
- Moisture sensitivity level: level 1
- Non degenerative
- Bi-directional

### Exterior

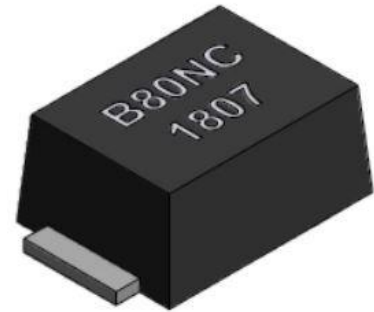


SMB-F

### Application Information

- Ethernet

### Package (Top View)

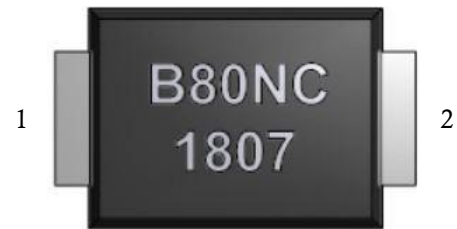

### Agency Approvals

Icon	Description
<b>RoHS</b>	Compliance with 2011/65/EU
<b>HF</b>	Compliance with IEC61249-2-21:2003

### Schematic Symbol



### Part Number and Electrical Parameter

Part Number	$I_{DRM}@V_{DRM}^{\text{①}}$		$V_S^{\text{②}}@I_S$		$V_T@I_T$		$I_H$	$C_o^{\text{③}}$
	$\mu A$	V	V	mA	V	A	mA	pF
	MAX		MAX		MAX		MAX	MAX
BS8000N-C-F	5	750	1000	800	4	2.2	50	50

Absolute maximum ratings measured at  $T_A = 25^\circ C$  RH = 45%-75% (unless otherwise noted).

- ① Hi-pot: AC500V
- ②  $V_S$  is measured at 100KV/S.
- ③ Off-state Capacitance is measured at  $V_{DC}=2V$ ,  $V_{RMS}=1V$ ,  $f=1MHz$ .

## Thyristor Surge Suppressors - BS8000N-C-F Series

### Part Numbering System

BS    8000    N    C    F  
 (1)    (2)    (3)    (4)    (5)

- (1) SURGING Semiconductor Surge Arrester
- (2) Off-state Voltage
- (3) Package: SMB
- (4) Rating Surge Voltage: 6KV (10/700 $\mu$ s)
- (5) Flat feet


### Mark



B80NC: Part Number  
 1807: July, 2018

### V-I Curve

Parameters	Definition
V <sub>DRM</sub>	Peak Off-state Voltage
I <sub>DRM</sub>	Off-state Current
V <sub>S</sub>	Switching Voltage
I <sub>S</sub>	Switching Current
I <sub>H</sub>	Holding Current
V <sub>T</sub>	On-state Voltage
I <sub>T</sub>	On-state Current
C <sub>o</sub>	Off-state Capacitance

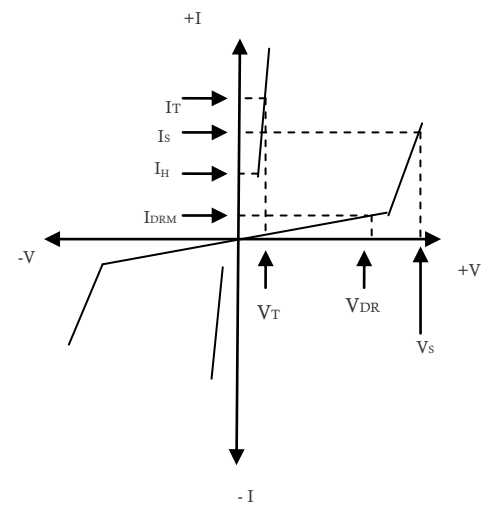

### Surge Ratings

Current Waveform	8/20 $\mu$ s	8/20 $\mu$ s	5/320 $\mu$ s*	10/1000 $\mu$ s
Voltage Waveform	1.2/50 $\mu$ s	1.2/50 $\mu$ s	10/700 $\mu$ s*	10/1000 $\mu$ s
I <sub>pp</sub>	400A	6KV@12 $\Omega$ $\pm$ 25T	150A	100A

- Peak pulse current rating (I<sub>pp</sub>) is repetitive and guaranteed for the life of the product;
- SURGING only makes the test for 5/320 $\mu$ s@150A\* (10/700 $\mu$ s@6KV), but for other IPP value derived from experience is just for reference only. SURGING will not take any obligation for these parameters, so before applying our parts, please make sure to verify the parameters listed in the above table.

### Thermal Considerations






symbol	Parameter	Value	Unit
T <sub>J</sub>	Operating Junction Temperature Range	-40 to +150	°C
T <sub>S</sub>	Storage Temperature Range	-60 to +150	°C

### Physical Characteristics

Lead Material	Copper Alloy
Body Material	UL recognized epoxy meeting flammability classification 94V-0
Terminal Finish	100% Matte-Tin Plated

# Thyristor Surge Suppressors - BS8000N-C-F Series

## Typical Characteristics

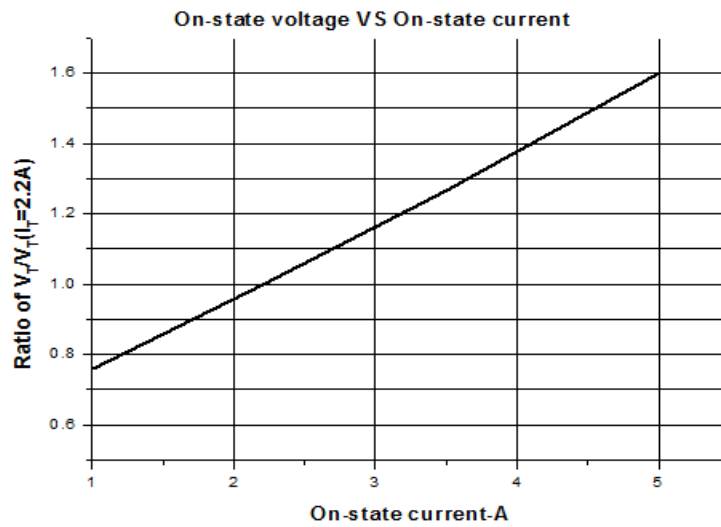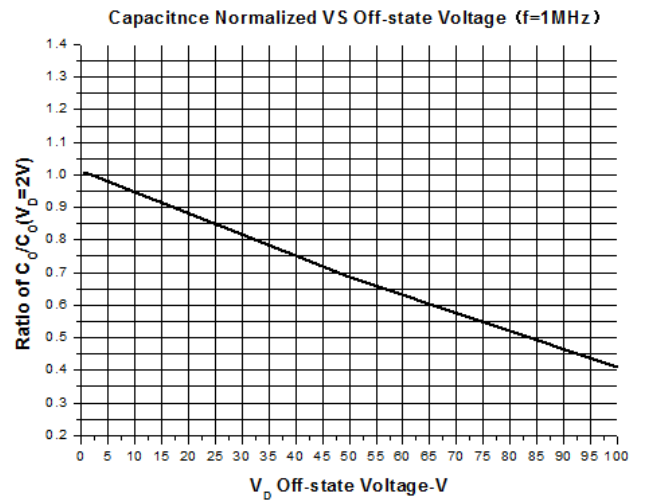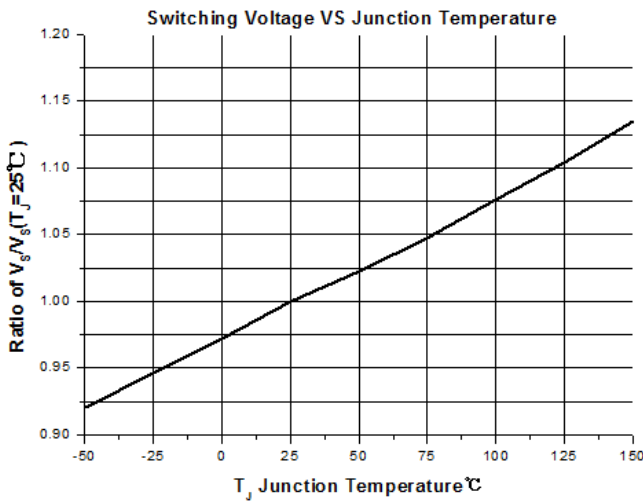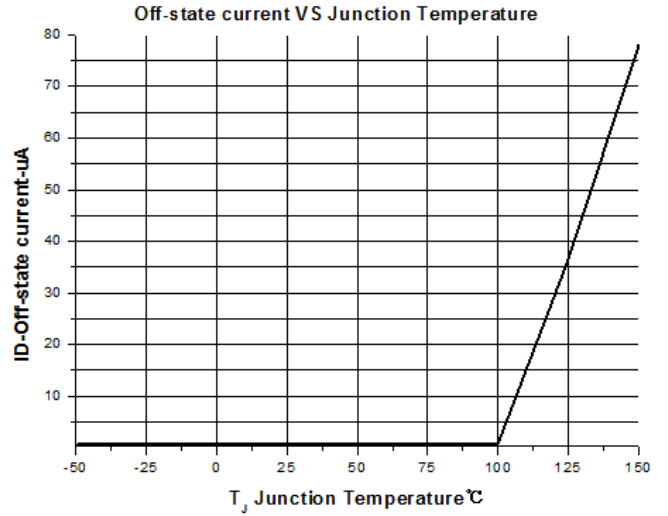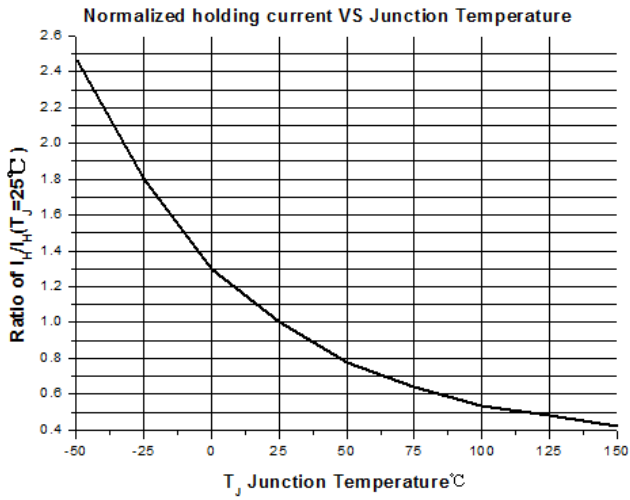


## Thyristor Surge Suppressors - BS8000N-C-F Series

### Environmental Characteristics

Testing Items	Technical Standards
High Temperature Reverse Bias Test	Temperature: $150\pm 3^{\circ}\text{C}$ , Bias= $80\%V_{\text{DRM}}$ Time: 168H
High Temperature Life Test	Temperature: $150^{\circ}\text{C}$ Time: 168H
High-low Temperature Cycle Test	Temperature: From $-40^{\circ}\text{C}$ to $125^{\circ}\text{C}$ Dwell time: 30min, 10-100 cycles
High Temperature & High Humidity Test	Temperature: $85^{\circ}\text{C}$ , Humidity: 85% Test time: 168H
Pressure Cooker Test	Temperature: $121^{\circ}\text{C}$ , 2atm. Humidity: 100% Test time: 24H to 168H
Resistance of Soldering Heat	Temperature: $260\pm 5^{\circ}\text{C}$ Time of dip soldering: 10s, 3times


Note: The above testing items can be specified by customers by contacting SURGING service

### Product Dimensions

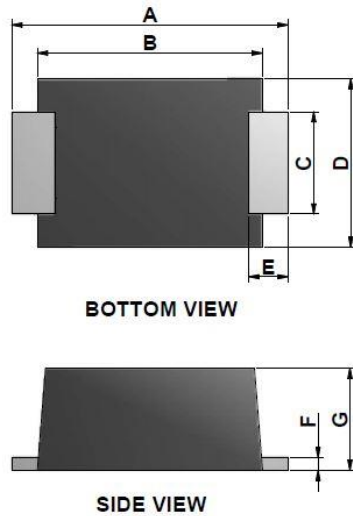

REF	mm	inch
A	$5.4\pm 0.3$	$0.213\pm 0.012$
B	$4.4\pm 0.2$	$0.173\pm 0.008$
C	$2.0\pm 0.1$	$0.079\pm 0.004$
D	$3.3\pm 0.3$	$0.130\pm 0.012$
E	$0.8\pm 0.3$	$0.031\pm 0.012$
F	$0.25\pm 0.05$	$0.010\pm 0.002$
G	$2\pm 0.3$	$0.079\pm 0.012$

### Recommended Soldering Pad

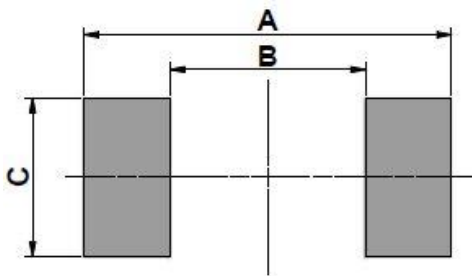


REF	mm	inch
A	5.9	0.232
B	3.4	0.134
C	2.5	0.098


# Thyristor Surge Suppressors - BS8000N-C-F Series

## Reflow Profile

Reflow Condition		Pb-Free assembly
Pre Heat	Temperature Min	150°C
	Temperature Max	200°C
	Time (min to max)	60 – 180 seconds
Average ramp up rate (Liquid)Tamp (T <sub>L</sub> ) to peak		3°C/second max
TS (max) to TL - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T <sub>L</sub> ) (Liquid)	217°C
	- Temperature (T <sub>L</sub> )	60 – 150 seconds
Peak Temperature (T <sub>P</sub> )		260 +0/-5 °C
Time within 5°C of actual peak Temperature (T <sub>P</sub> )		8-15 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T <sub>P</sub> )		8 minutes Max.
Do not exceed		260°C

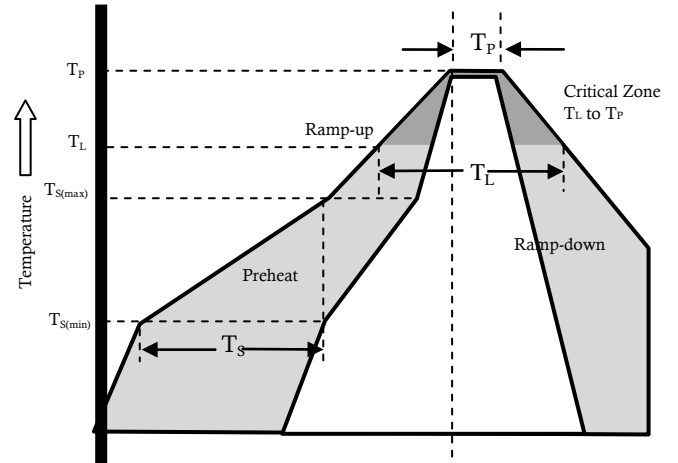

## Package Reel Information

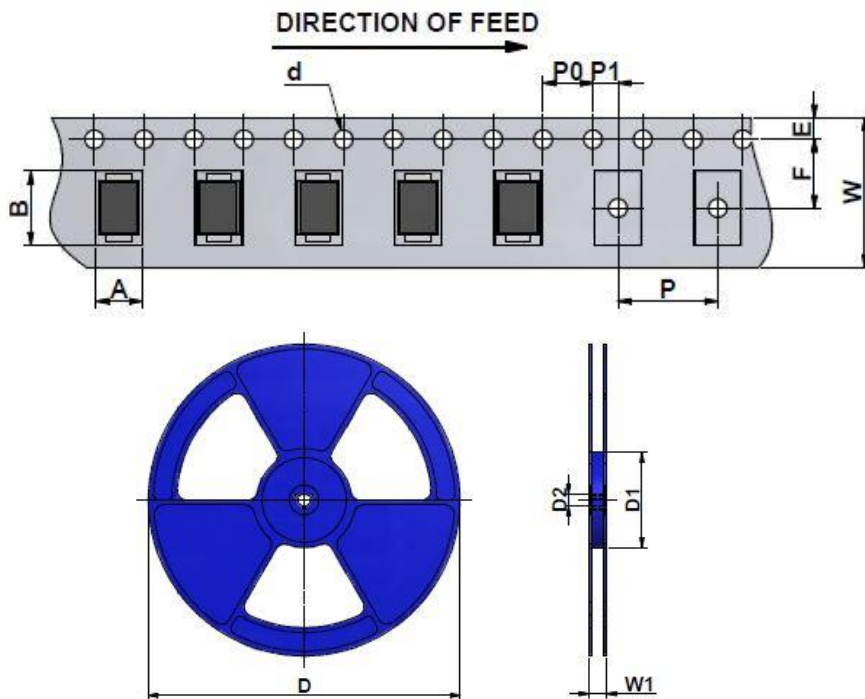

REF	mm	inch
A	3.9±0.2	0.154±0.008
B	5.8±0.2	0.228±0.008
d	1.5±0.1	0.059±0.004
D	330.0	13.0
D1	100±3	3.937±0.118
D2	13±0.3	0.512±0.012
E	1.75±0.2	0.069±0.008
F	5.5±0.25	0.217±0.010
P	8.0±0.2	0.315±0.008
P0	4.0±0.2	0.157±0.008
P1	2.0±0.2	0.079±0.008
W	12.0±0.2	0.472±0.008
W1	16.8±2.0	0.661±0.079

OUTLINE	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETERS (mm)	CARTON SIZE(mm)		
				L	W	H
TAPING	3,000	48,000	330	360	360	385