开口型

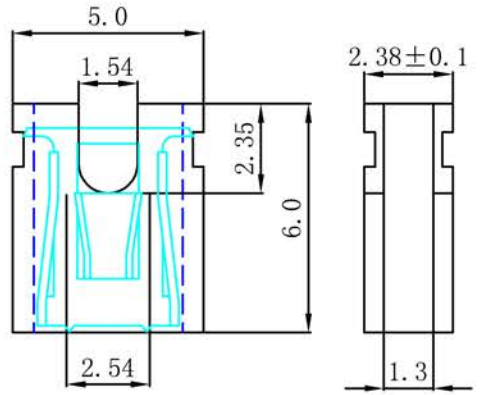

闭口型

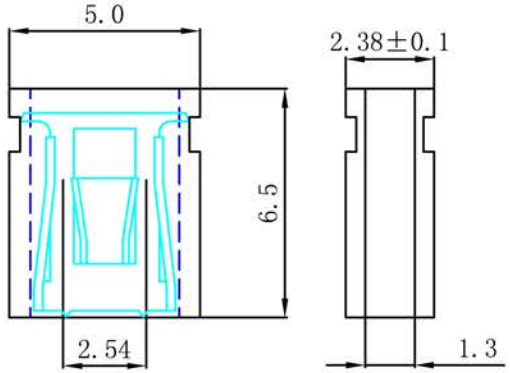

带手柄

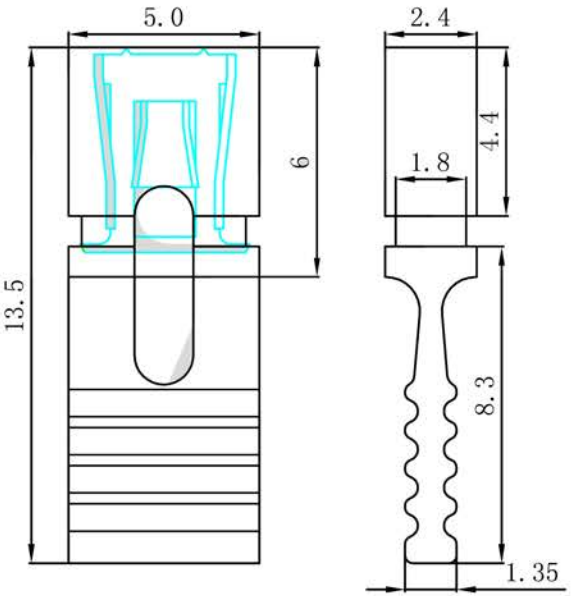

SPECIFICATIONS

Current Rating: 3.0AMP
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstand Voltage: 500V AC/minute
Operation Temperature: -40℃ to +105℃
Contact Material: PHosphor bronze
Contact Plating:Au or Sn over 50 μ″Ni
Insulator Material:Polyester(UL94V-0)
Standard:PBT

Ordering Code

①	②	③	④	⑤	⑥	⑦
XX	3	X	XX	X	X	X

① Connector Type:
11=Mini Jumper
21=Parallel Type
31=With Tail

② Pith: 3=2.54mm

③ Plastics Height:
3=3.5mm
4=4.5mm
5=5.0mm

④ Number of Contacts:
01=Single Type
04=(1x4)Parallel Type
10=(1x10)Parallel Type
20=(1x20)Parallel Type

⑤ Function:
C=Close Type
O=Open Type

⑥ Contact Plated
0=Tin 1=Gold Flash
2=Gold 3u" 3=Gold 5u"
4=Gold 10u" 5=Gold 15u"
6=Gold 30u"

⑦ Color:
B=Black U=Blue
R=Red W=white
Y=Yellow G=Grey

REV	ZONE	LTR	DESCRIPTION.	ECN.NO.	Date
A			RELEASED		03/08-10

Units: mm | Scale: 1:1
Tolerance Unless Otherwise Specified
.X ~ ±0.30
.XX ~ ±0.25
.XXX ~ ±0.20
Angle ~ ± 3°

Drawing By Date
Check By Date
Approval By Date

Date: 2010/08/03
Sheet: 1 of 1
Title: 2.54短路帽
Thirt Angle Projection
Drawing No.: YX-TEMP-045
REV: A
File Path