

SPECIFICATIONS

Rated(额定参数): 300V,20A
 Dielectric strength(抗电强度): AC2000V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Screw Torque(扭矩): 0.8Nm (7.02Lb.in)
 Wire Range(线径):14~22AWG
 Temp. range(操作温度): -40℃~+105℃
 MAX Soldering(瞬时温度):+250°C,5s




Housing Material(塑件): PA66 (UL94 V-0)
 Contact(端子): Brass, Tin plating(黄铜镀锡)
 Screw (螺丝): M3.5, Steel, Ni plating(钢,镀镍)

| PITCH RANGE | | NOMINAL DIMENSION RANGE | |
|-------------|-------|-------------------------|-------|
| IN MM | | IN MM | |
| OVER | OVER | OVER | OVER |
| TO | TO | TO | TO |
| 6 | 10 | 30 | 60 |
| 10 | 24 | 60 | 100 |
| | | 100 | 150 |
| ±0.10 | ±0.15 | ±0.25 | ±0.30 |
| | | ±0.30 | ±0.50 |
| | | | ±0.70 |
| | | | ±1.00 |

Ordering Information

JL850 - 850 XX X X 1

Pitch 850=8.5PH
 No. of pins 2P~26P
 Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 F=Grey
 Packing
 O=Pe bog
 T=Tube
 A=Tray

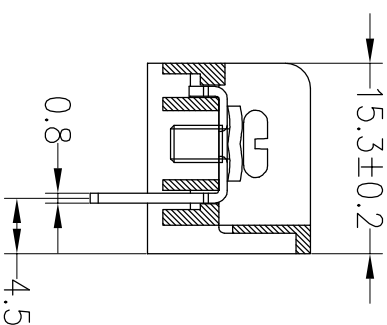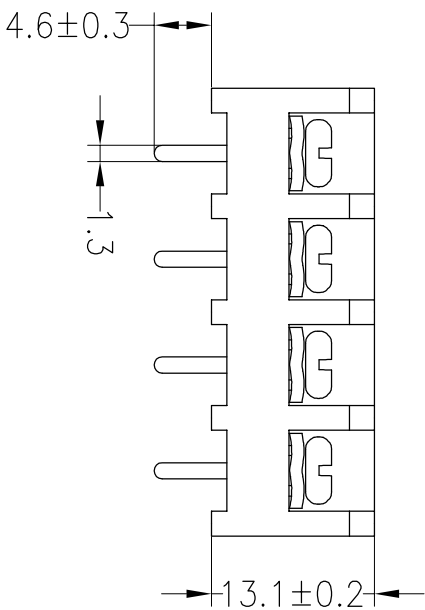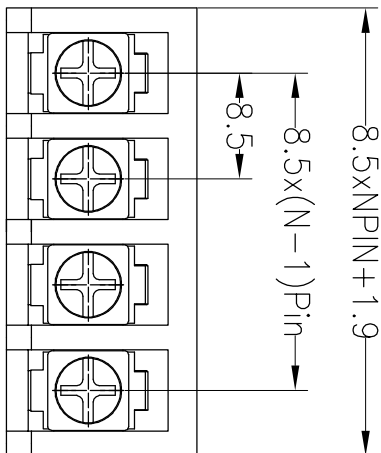

| REV | DATE | MODIFICATION DESCRIPTION |
|-----|------------|--------------------------|
| A0 | 2019.05.18 | NEW DRAWING |

| OPERATION | DRAW | Yiyusheng | 19.05.18 |
|-----------|-------|-----------|----------|
| XX | ±0.30 | | |
| X.XX | ±0.20 | CHECK | |
| X.XXX | ±0.10 | | |
| Angle | ±3° | APPROVE | |
| ØIM | TOL | | |

| SCALE | FIT | UNIT | SIZE | SHEET | PROU. | PART NO. | TITLE: |
|-------|-----|------|------|-------|-------|-----------------|-------------------------------|
| A4 | 1/1 | mm | A4 | 1/1 | ◆ | JL850-850XXXXX1 | 8.5mm Barrier Terminal Blocks |

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992