

## Features


- Low reverse current and low forward voltage
- High reliability
- Small surface mounting type

## Typical Applications


- For general purpose applications

## Mechanical Data

- Molding compound, UL flammability classification rating 94V-0
- Terminals: Tin plated leads, solderable per MIL-STD-202, Method 208



SOD-323



## Maximum Ratings (@T<sub>A</sub>=25°C unless otherwise specified)

Parameter	Symbol	PMEG4010BEA,115-JSM	Units
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>	40	V
RMS Reverse Voltage	V <sub>RMS</sub>	28	V
Maximum Average Forward Output Current	I <sub>F(AV)</sub>	1	A
Peak Forward Surge Current,8.3ms Single Half-sine-wave	I <sub>FSM</sub>	10	A

## Thermal Characteristics

Parameter	Symbol	PMEG4010BEA,115-JSM	Units
Power Dissipation	P <sub>D</sub>	250	mW
Typical Thermal Resistance per leg	R <sub>θJA</sub> *	400	°C/W
Operating Junction Temperature Range	T <sub>J</sub>	125	°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +150	°C

\* Part mounted on FR-4 board with recommended pad layout

## Electrical Characteristics (@T<sub>A</sub>=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min.	Typ.	Max.	Units
Forward Voltage	V <sub>F</sub> *	I <sub>F</sub> =1A			0.60	V
		I <sub>F</sub> =3A	-	-	0.90	
Maximum Peak Reverse Current	I <sub>R</sub> **	V <sub>R</sub> = 40V	-	-	1	mA
Capacitance Between Terminals	C <sub>T</sub>	V <sub>R</sub> =4V,f=1MHz	-	39	120	pF

\*Pulse width ≤380 uS, Duty cycle < 2%\*

\*pulse test , t<sub>p</sub>≤5ms

**Ratings and Characteristic Curves** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

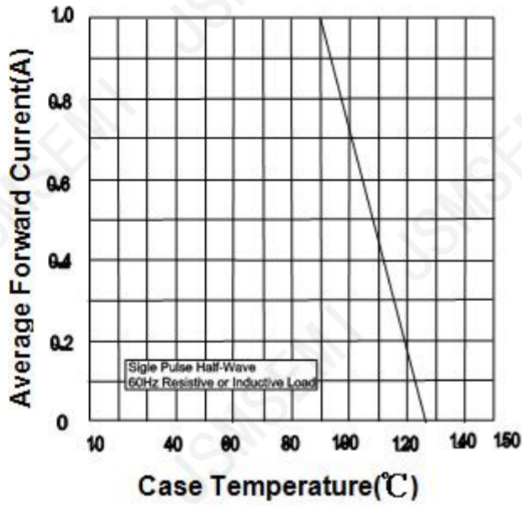


Fig.1 Forward Current Derating Curve

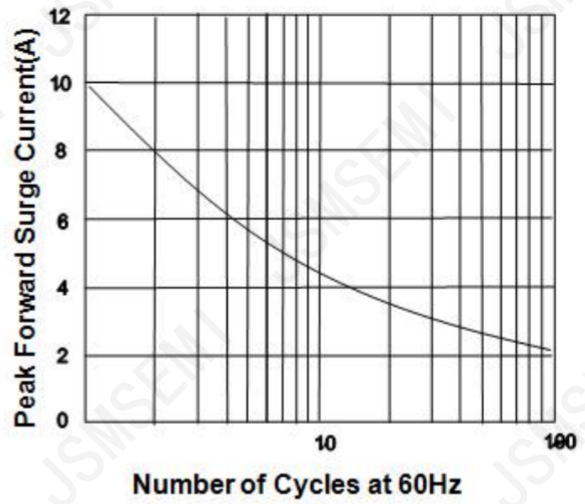


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

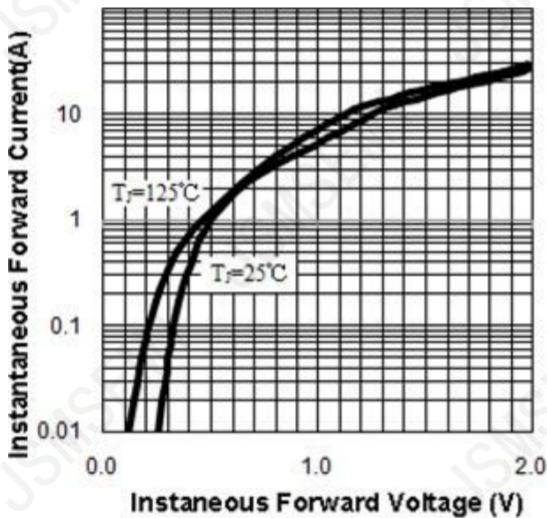


Fig.3 Typical Instantaneous Forward Characteristics


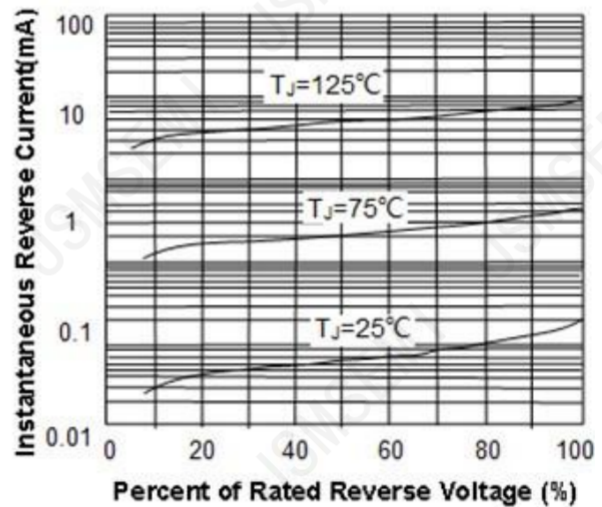


Fig.4 Typical Reverse Characteristics


**Package Outline Dimensions** (unit: mm)

SOD-323

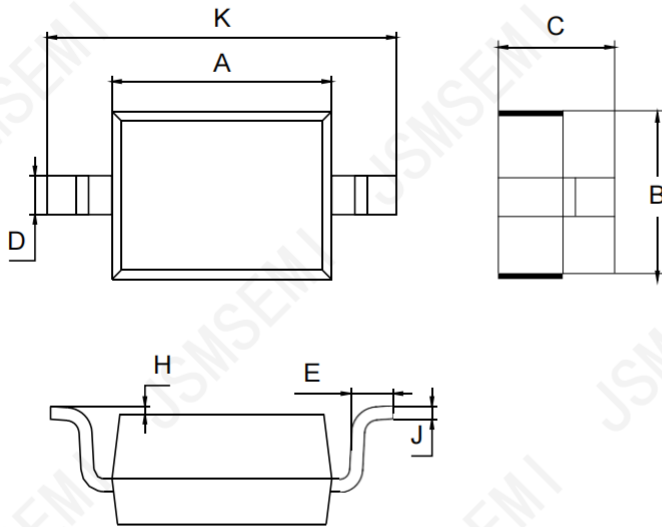

SOD-323		
Dim	Min	Max
A	1.60	1.80
B	1.20	1.40
C	0.80	0.90
D	0.25	0.35
E	0.22	0.42
H	0.02	0.10
J	0.05	0.15
K	2.55	2.75

**Mounting Pad Layout** (unit: mm)

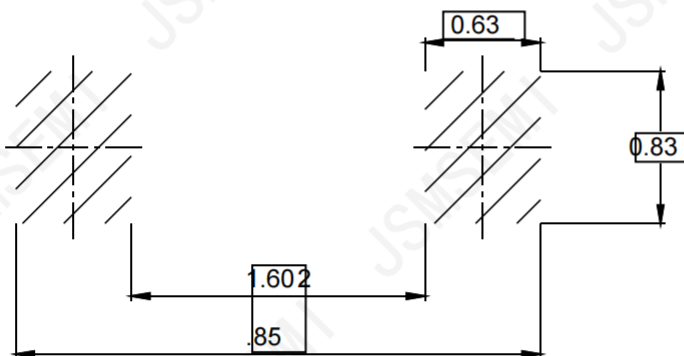

## Revision History

Rev.	Change	Date
V1.0	Initial version	6/27/2021

## Important Notice

JSMSEMI Semiconductor (JSMSEMI) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC JSMSEMI PRODUCTS ARE SPECIFICALLY DESIGNATED BY JSMSEMI FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF JSMSEMI PRODUCTS WHICH JSMSEMI HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER' S RISK.

JSMSEMI assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using JSMSEMI products.

Resale of JSMSEMI products or services with statements diferent from or beyond the parameters stated by JSMSEMI for that product or service voids all express and any implied warranties for the associated JSMSEMI product or s ervice. JSMSEMI is not responsible or liable for any such statements.

JSMSEMI All Rights Reserved. Information and data in this document are owned by JSMSEMI wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from JSMSEMI.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the JSMSEMI product that you intend to use.

For additional information please contact [Kevin@jsmsemi.com](mailto:Kevin@jsmsemi.com) or visit [www.jsmsemi.com](http://www.jsmsemi.com)