GaN Amplifier 50 V, 300 W
2.4 - 2.5 GHz

MAGE-102425-300S00
Rev. V4

Features

- Optimized for RF Energy Applications
- Suitable for Linear and Saturated Applications
- CW and Pulsed Operation: 300 W Output Power
- Internally Pre-Matched
- 50 V Operation
- 100% RF Tested
- RoHS* Compliant




AC-780S-2

Description

The MAGE-102425-300S00 is a GaN HEMT D-mode amplifier designed for RF Energy applications and optimized for 2.4 - 2.5 GHz CW signal operation. This device supports CW and pulsed operation with peak output power levels to 300 W (54.8 dBm) in an air cavity ceramic package.

The MAGE-102425-300S00 is ideally suited for CW applications as a highly efficient precise heat and power source. The wide range of applications includes solid state cooking, RF plasma generation, material drying, industrial heating, automotive ignition, lighting and medical.

Functional Schematic

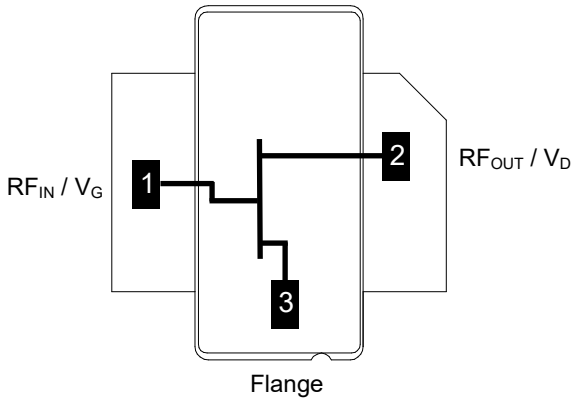

Typical Performance:

- V_{DS} = 50 V, I_{DQ} = 300 mA, T_C = 25°C
  Measured under pulsed load-pull at 2.5 dB compression, 100 µs pulse width, 10% duty cycle.

Frequency (GHz)	Gain[2] (dB)	η_D[2] (%)	Output Power[1] (dB)
2.45	16.7	75	55.6

1. Load impedance tuned for maximum output power.
2. Load impedance tuned for maximum drain efficiency.

Pin Configuration

Pin #	Pin Name	Function
1	RF$_{IN}$ / V$_G$	RF Input / Gate
2	RF$_{OUT}$ / V$_D$	RF Output / Drain
3	Flange[3]	Ground / Source

3. The flange on the package bottom must be connected to RF, DC and thermal ground.

Ordering Information

Part Number	Package
MAGE-102425-300S00	Bulk Quantity
MAGE-102425-300ST0	Tape and Reel
MAGE-1D2425-300S00	Sample Board

* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support

RF Electrical Characteristics: T_C = +25°C, V_{DS} = 50 V, I_{DQ} = 300 mA
Note: Performance in MACOM Evaluation Test Fixture, 50 Ω system

Parameter	Test Conditions	Symbol	Min.	Typ.	Max.	Units
Small Signal Gain	Pulsed[4], 2.45 GHz	G_{SS}	-	15.0	-	dB
Power Gain	CW, 2.45 GHz, 2 dB Gain Compression	G_{SAT}	-	14.0	-	dB
Saturated Drain Efficiency	CW, 2.45 GHz, 2 dB Gain Compression	η_{SAT}	-	65.0	-	%
Saturated Output Power	CW, 2.45 GHz, 2 dB Gain Compression	P_{SAT}	-	55.4	-	dBm
Gain Variation (-40°C to +85°C)	Pulsed[4] 2.45 GHz	ΔG	-	0.02	-	dB/°C
Power Variation (-40°C to +85°C)	Pulsed[4] 2.45 GHz	$\Delta P2dB$	-	0.02	-	dB/°C
Gain	Pulsed[4], 2.45 GHz, P_{OUT} = 54.8 dBm	G_P	-	15.0	-	dB
Drain Efficiency	Pulsed[4], 2.45 GHz, P_{OUT} = 54.8 dBm	η	-	62	-	%
Ruggedness: Output Mismatch	Pulsed[4], 2.45 GHz, All phase angles	Ψ	VSWR = 10:1, No Damage			
Ruggedness: Output Mismatch	CW, 2.45 GHz, All phase angles	Ψ	VSWR = 3:1, No Damage			

RF Electrical Specifications: T_A = +25°C, V_{DS} = 50 V, I_{DQ} = 300 mA
Note: Performance in MACOM Production Test Fixture, 50 Ω system

Parameter	Test Conditions	Symbol	Min.	Typ.	Max.	Units
Power Gain	Pulsed[4], 2.5 GHz, 2 dB Gain Compression	G_{SAT}	11.5	14.0	-	dB
Saturated Drain Efficiency	Pulsed[4], 2.5 GHz, 2 dB Gain Compression	η_{SAT}	54.7	62.5	-	%
Saturated Output Power	Pulsed[4], 2.5 GHz, 2 dB Gain Compression	P_{SAT}	53.5	54.7	-	dBm
Gain	Pulsed[4], 2.5 GHz, P_{IN} = 41 dBm	G_P	11.2	13.7	-	dB
Drain Efficiency	Pulsed[4], 2.5 GHz, P_{IN} = 41 dBm	η	55.1	62.8	-	%

4. Pulse details: 100 µs pulse width, 10% Duty Cycle.

DC Electrical Characteristics T_A = +25°C

Parameter	Test Conditions	Symbol	Min.	Typ.	Max.	Units
Drain-Source Leakage Current	V_{GS} = -8 V, V_{DS} = 130 V	I_{DLK}	-	-	54	mA
Gate-Source Leakage Current	V_{GS} = -8 V, V_{DS} = 0 V	I_{GLK}	-	-	54	mA
Gate Threshold Voltage	V_{DS} = 50 V, I_D = 54 mA	V_T	-2.6	-2.1	-	V
Gate Quiescent Voltage	V_{DS} = 50 V, I_D = 300 mA	V_{GSQ}	-2.4	-2.0	-1.4	V
Maximum Drain Current	V_{DS} = 7 V pulsed, pulse width 300 µs	$I_{D, MAX}$	-	45.9	-	A

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support

Absolute Maximum Ratings[5,6,7,8,9]

Parameter	Absolute Maximum
Drain Source Voltage, V_{DS}	130 V
Gate Source Voltage, V_{GS}	-10 to 3 V
Gate Current, I_G	54 mA
Storage Temperature Range	-65°C to +150°C
Case Operating Temperature Range	-40°C to +85°C
Channel Operating Temperature Range, T_{CH}	-40°C to +225°C
Absolute Maximum Channel Temperature	+250°C

5. Exceeding any one or combination of these limits may cause permanent damage to this device.
6. MACOM does not recommend sustained operation above maximum operating conditions.
7. Operating at drain source voltage V_{DS} < 55 V will ensure MTTF > 1 x 10^7 hours.
8. Operating at nominal conditions with T_{CH} ≤ 225°C will ensure MTTF > 1 x 10^7 hours.
9. MTTF may be estimated by the expression MTTF (hours) = A $e^{[B + C/(T+273)]}$ where *T* is the channel temperature in degrees Celsius, *A* = 3.686, *B* = -35.00, and *C* = 25,416.

Thermal Characteristics[10]

Parameter	Test Conditions	Symbol	Typical	Units
Thermal Resistance using Finite Element Analysis	V_{DS} = 50 V, T_C = 85°C, T_{CH} = 225°C	R_θ(FEA)	0.76	°C/W
Thermal Resistance using Infrared Measurement of Die Surface Temperature	V_{DS} = 50 V, T_C = 85°C, T_{CH} = 225°C	R_θ(IR)	0.64	°C/W

10. Case temperature measured using thermocouple embedded in heat-sink. Contact local applications support team for more details on this measurement.

Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

Gallium Nitride Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these HBM Class 1C, CDM Class C3 devices.

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.


For further information and support please visit:
https://www.macom.com/support

Pulsed[4] Load-Pull Performance
Reference Plane at Device Leads

Frequency (GHz)	Z_{SOURCE} (Ω)	Maximum Output Power					
		V_{DS} = 50 V, I_{DQ} = 300 mA, T_C = 25°C, P2.5dB					
		Z_{LOAD}[11] (Ω)	Gain (dB)	P_{OUT} (dBm)	P_{OUT} (W)	η_D (%)	AM/PM (°)
2.40	1.3 - j4.8	1.3 - j3.3	15.2	55.8	380	70.0	53
2.45	2 .0 - j5.0	1.5 - j3.2	16.0	55.6	371	72.8	45
2.50	2.0 - j5.6	1.0 - j3.5	15.2	55.8	380	69.0	41

Frequency (GHz)	Z_{SOURCE} (Ω)	Maximum Drain Efficiency					
		V_{DS} = 50 V, I_{DQ} = 300 mA, T_C = 25°C, P2.5dB					
		Z_{LOAD}[12] (Ω)	Gain (dB)	P_{OUT} (dBm)	P_{OUT} (W)	η_D (%)	AM/PM (°)
2.40	1.3 - j4.8	1.95 - j3.0	16.5	54.5	280	73	47
2.45	2.0 - j5.0	2.1 - j2.8	16.7	54.2	263	75	42
2.50	2.0 - j5.6	1.9 - j2.9	16.6	54.3	270	73	30

Impedance Reference

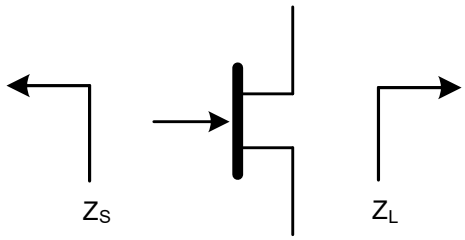

Z_{SOURCE} = Measured impedance presented to the input of the device at package reference plane.
Z_{LOAD} = Measured impedance presented to the output of the device at package reference plane.


11. Load Impedance for optimum output power.
12. Load Impedance for optimum efficiency.

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.


For further information and support please visit:
https://www.macom.com/support

Pulsed[4] Load-Pull Performance @ 2.45 GHz


P2.5dB Loadpull Output Power Contours (dBm)

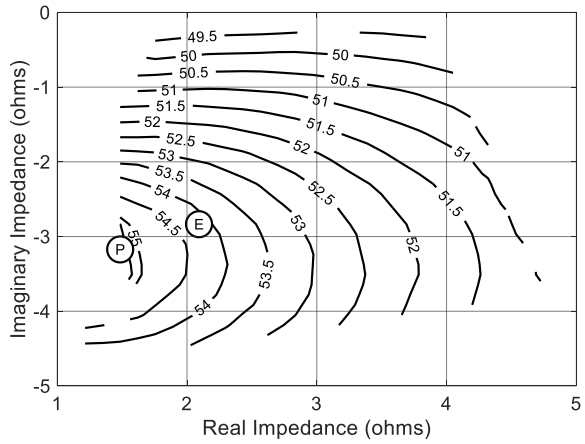


P2.5dB Loadpull Drain Efficiency Contours (%)

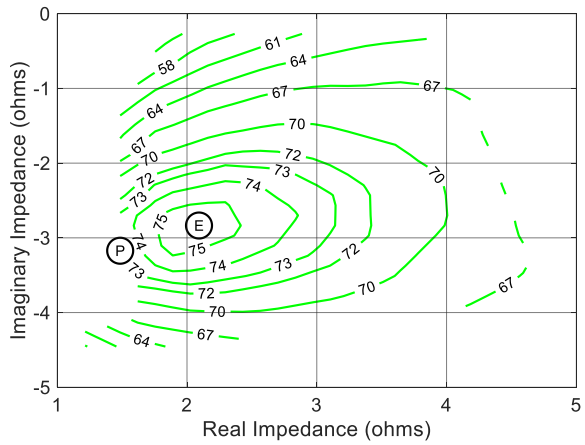


P2.5dB Loadpull Gain Contours (dB)

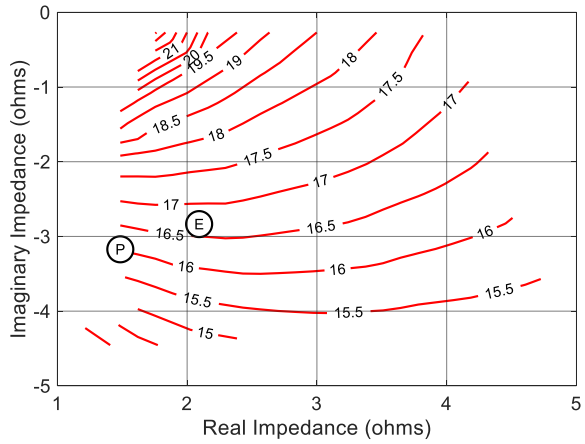


P2.5dB Loadpull AM/PM Contours (°)

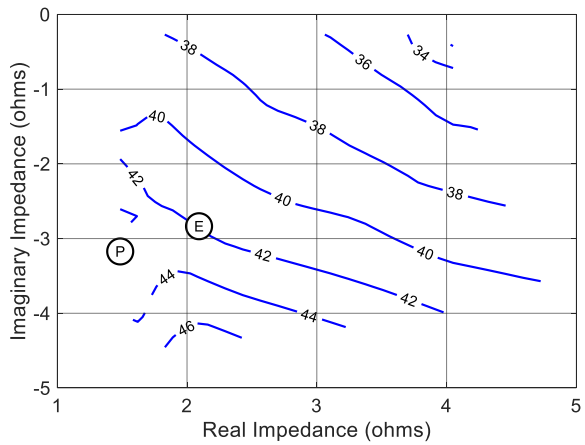

Gain vs. Output Power

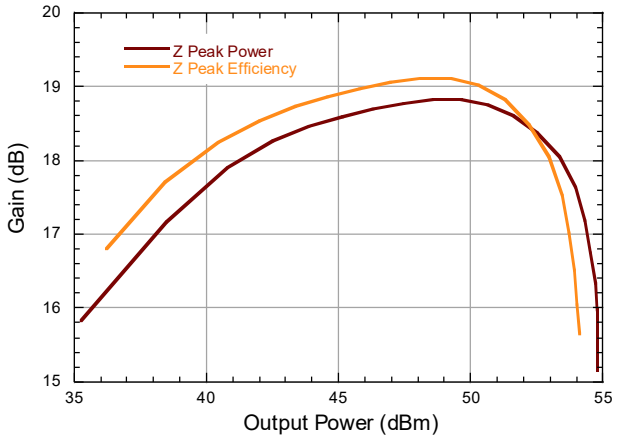


Drain Efficiency vs. Output Power

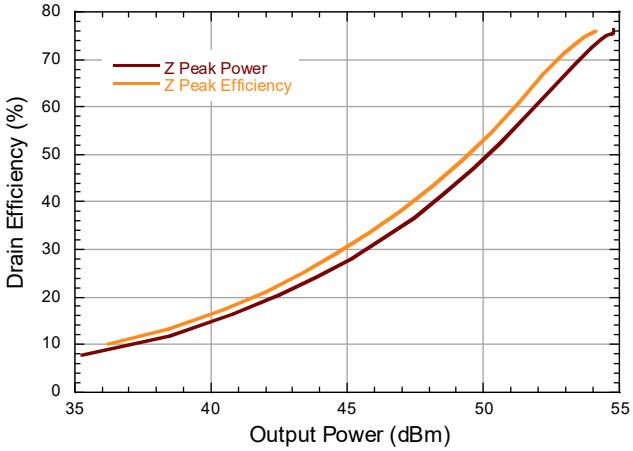

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support

Evaluation Test Fixture and Recommended Tuning Solution 2.4 - 2.5 GHz

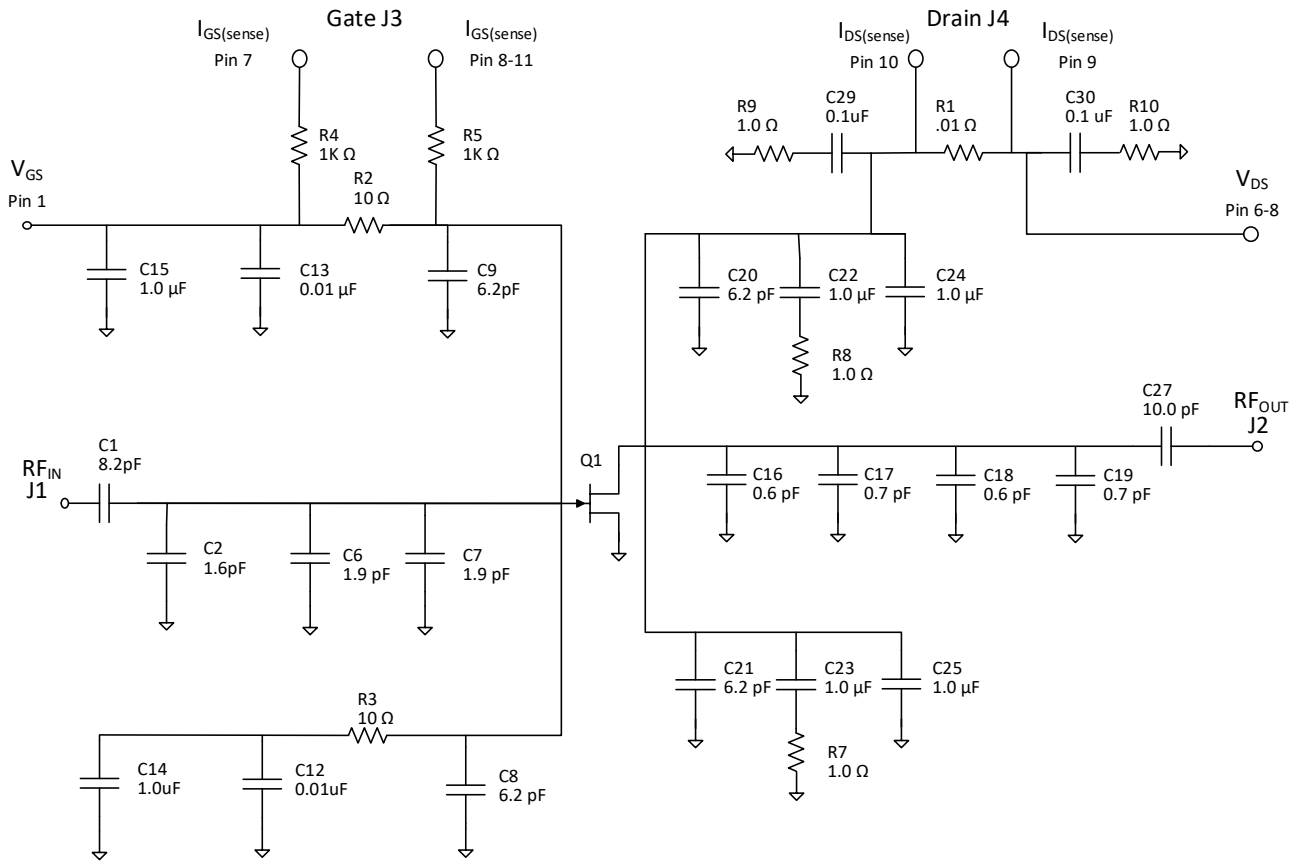

Description

Parts measured on evaluation board (30-mil thick RO4350). Matching is provided using a combination of lumped elements and transmission lines as shown in the simplified schematic above. Recommended tuning solution component placement, transmission lines, and details are shown on the next page.

Bias Sequencing

Turning the device ON

1. Set V_{GS} to pinch-off (V_P).
2. Turn on V_{DS} to nominal voltage (50 V).
3. Increase V_{GS} until I_{DS} current is reached.
4. Apply RF power to desired level.


Turning the device OFF

1. Turn the RF power off.
2. Decrease V_{GS} down to V_P pinch-off.
3. Decrease V_{DS} down to 0 V.
4. Turn off V_{GS}.

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support

Evaluation Test Fixture and Recommended Tuning Solution 2.4 - 2.5 GHz

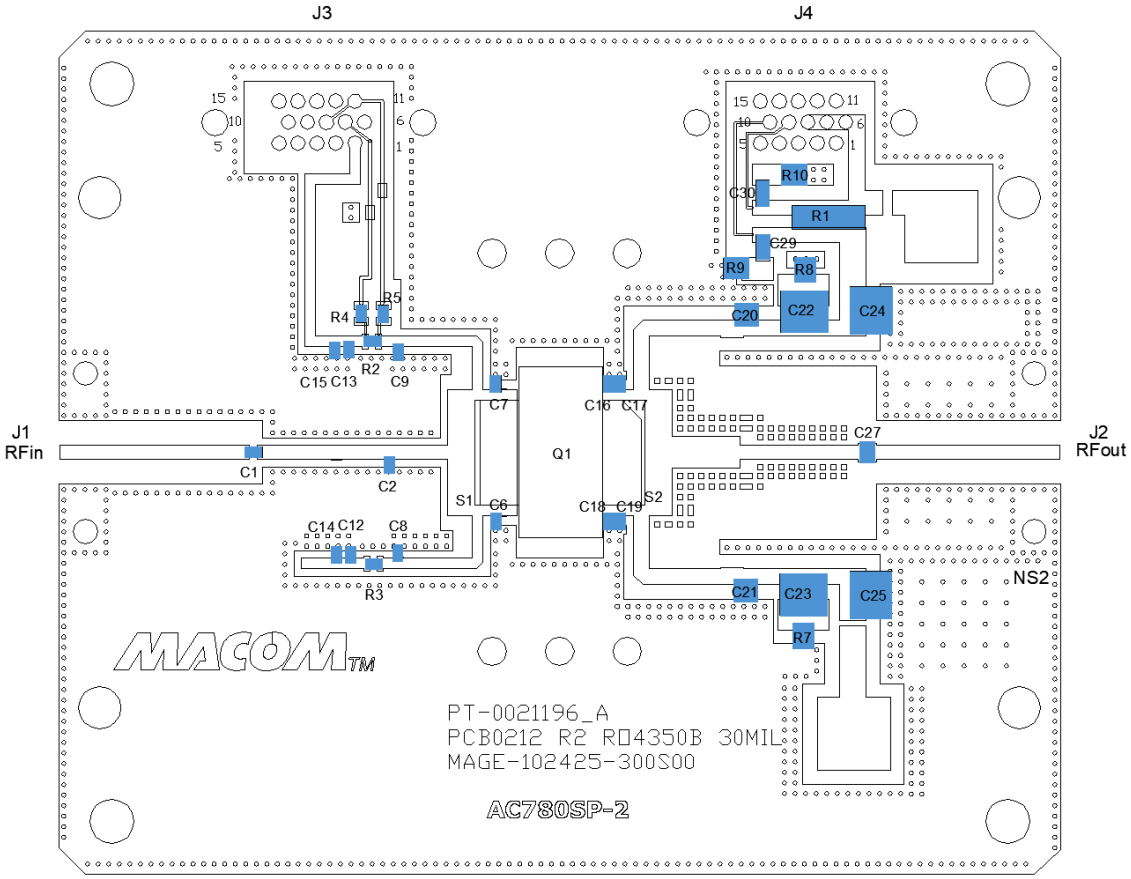


Reference Designator	Value	Tolerance	Manufacturer	Part Number
C1	8.2 pF	+/-0.25 pF	Passive Plus	0805N8R2CW251T
C2	1.6 pF	+/-0.1 pF	Passive Plus	0805N1R6CW251T
C6,C7	1.9 pF	+/-0.1 pF	Passive Plus	0805N1R9CW251T
C8,C9	6.2 pF	+/-0.25 pF	Passive Plus	0805N6R2CW251T
C13, C12	0.01 µF	+/-20%	Murata	GRM216R71H103MA01D
C14, C15	1 µF	+/-10%	Murata	GRM219R7YA105KA12D
C16, C18	0.6 pF	+/-0.05 pF	Passive Plus	0805N0R6CW251T
C17, C19	0.7 pF	+/-0.05 pF	Passive Plus	0805N0R7CW251T
C27	10 pF	+/-0.25 pF	Passive Plus	0708N100JW501XT
C20, C21	6.2 pF	+/-0.1 pF	Passive Plus	1111N6R2BW501XT
C29, C30	0.1 µF	+/-15%	Murata	GRM31CR72D104K03
C22, C23, C24, C25	1 µF	+/-15%	Murata	GRM55DR72D105KW01
R1	0.01 Ω	+/-1%	Viking	CS75FTFR010
R2, R3	10 Ω	+/-1%	Viking	CR-05FL7---10R
R4, R5	1K Ω	+/-1%	Viking	CR-05FL7---1K
R7, R8, R9, R10	1 Ω	+/-1%	Panasonic	ERJ-14BQF1R0U
Q1	MACOM GaN Power Amplifier			MAGE-102425-300S00
PCB	RO4350, 30 mil, 1 oz. Cu, Au Finish			

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.


For further information and support please visit:
https://www.macom.com/support

Typical Performance Curves as Measured in the 2.4 - 2.5 GHz Evaluation Test Fixture: Pulsed[4] 2.5 GHz, V_{DS} = 50 V, I_{DQ} = 300 mA, T_C = 25°C (Unless Otherwise Noted)


Gain vs. Output Power and Frequency

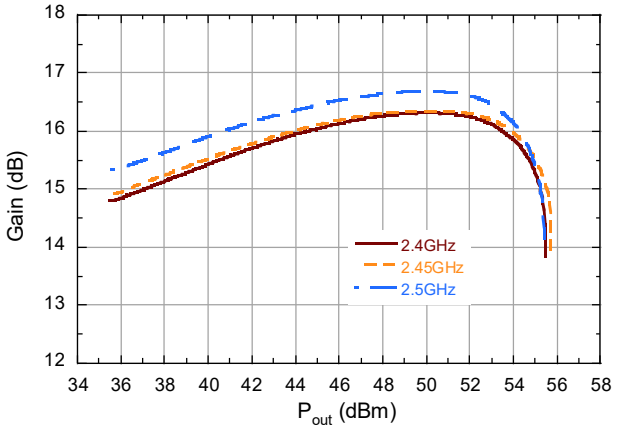


Drain Efficiency vs. Output Power and Frequency

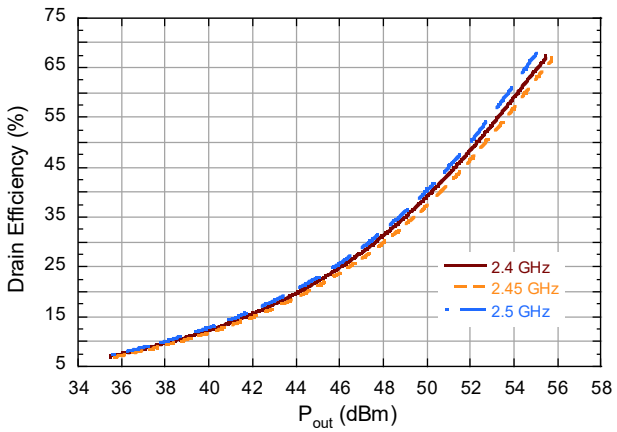


Gain vs. Output Power and V_{DS}

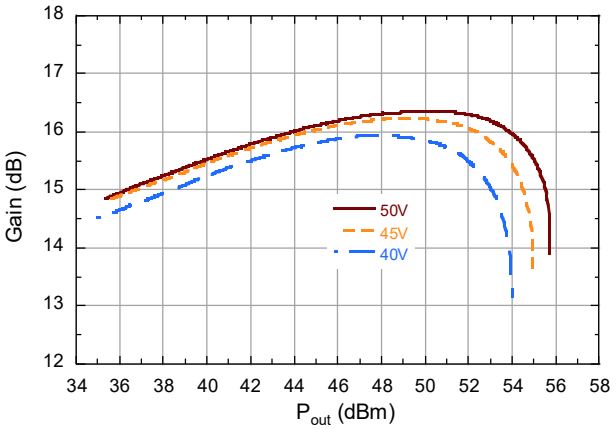


Drain Efficiency vs. Output Power and V_{DS}

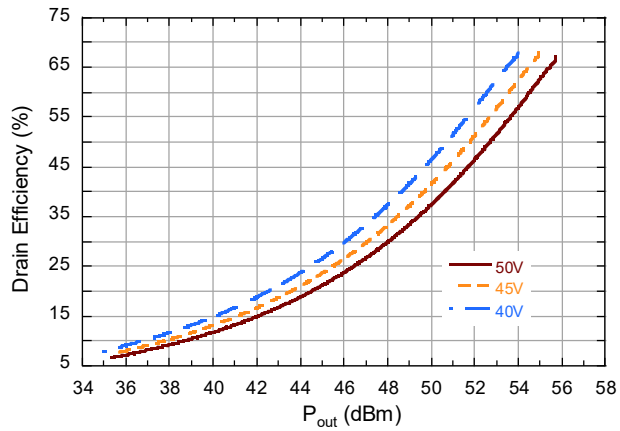

Gain vs. Output Power and I_{DQ}

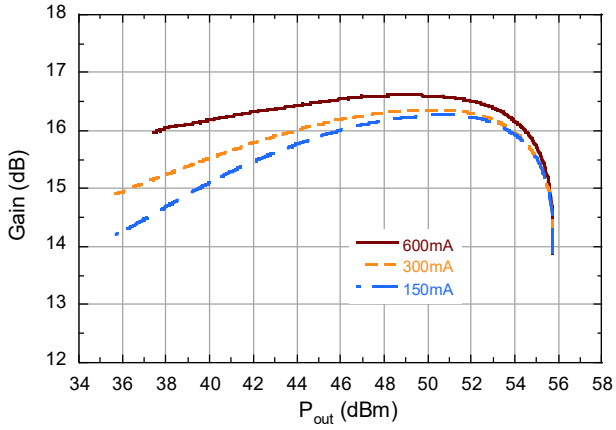

Drain Efficiency vs. Output Power and I_{DQ}

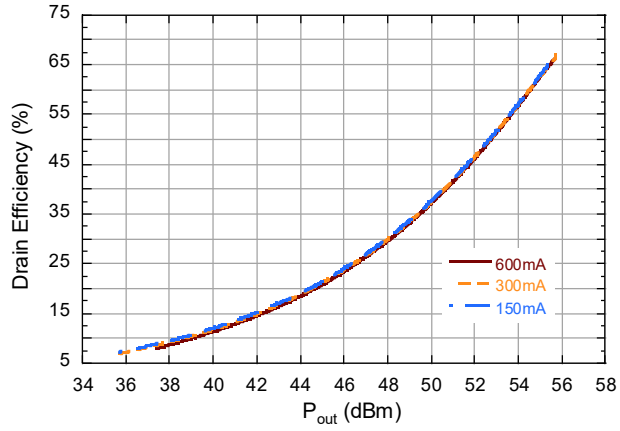


MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.


For further information and support please visit:
https://www.macom.com/support

Typical Performance Curves as Measured in the 2.4 - 2.5 GHz Evaluation Test Fixture: Pulsed[4] 2.5 GHz, V_{DS} = 50 V, I_{DQ} = 300 mA, T_C = 25°C (Unless Otherwise Noted)


Gain vs. Output Power and Temperature

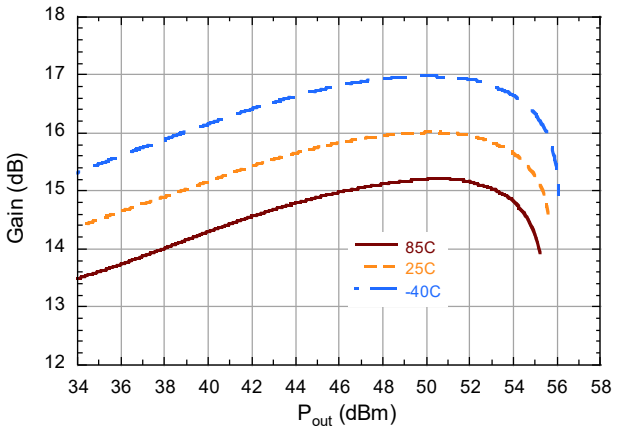


Drain Efficiency vs. Output Power and Temperature

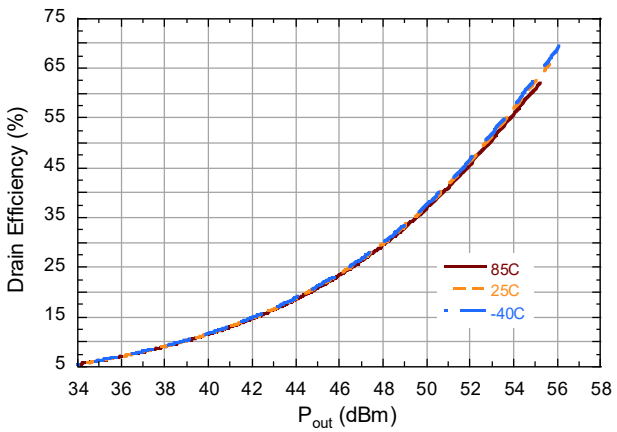


CW, 2.0 dB Compression, Gain vs. Frequency

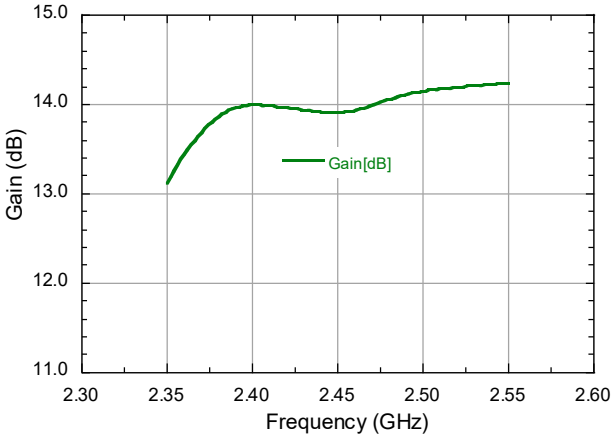

CW, 2.0 dB Compression, Drain Efficiency vs. Frequency

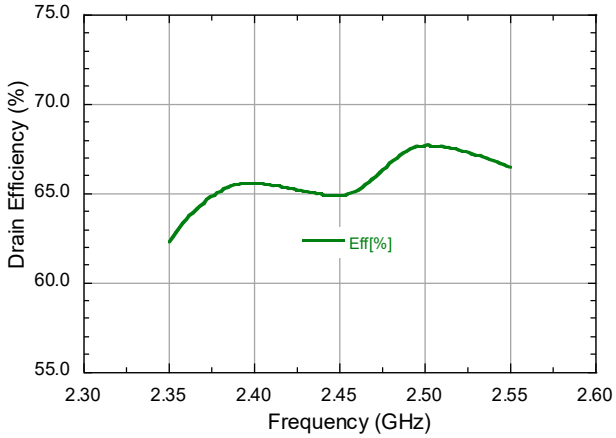


CW, 2.0 dB Compression, Output Power vs. Frequency

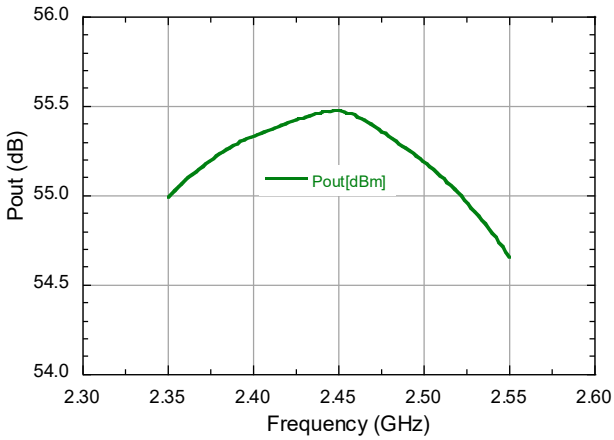

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support

Lead-Free AC-780S-2 Package Dimensions†

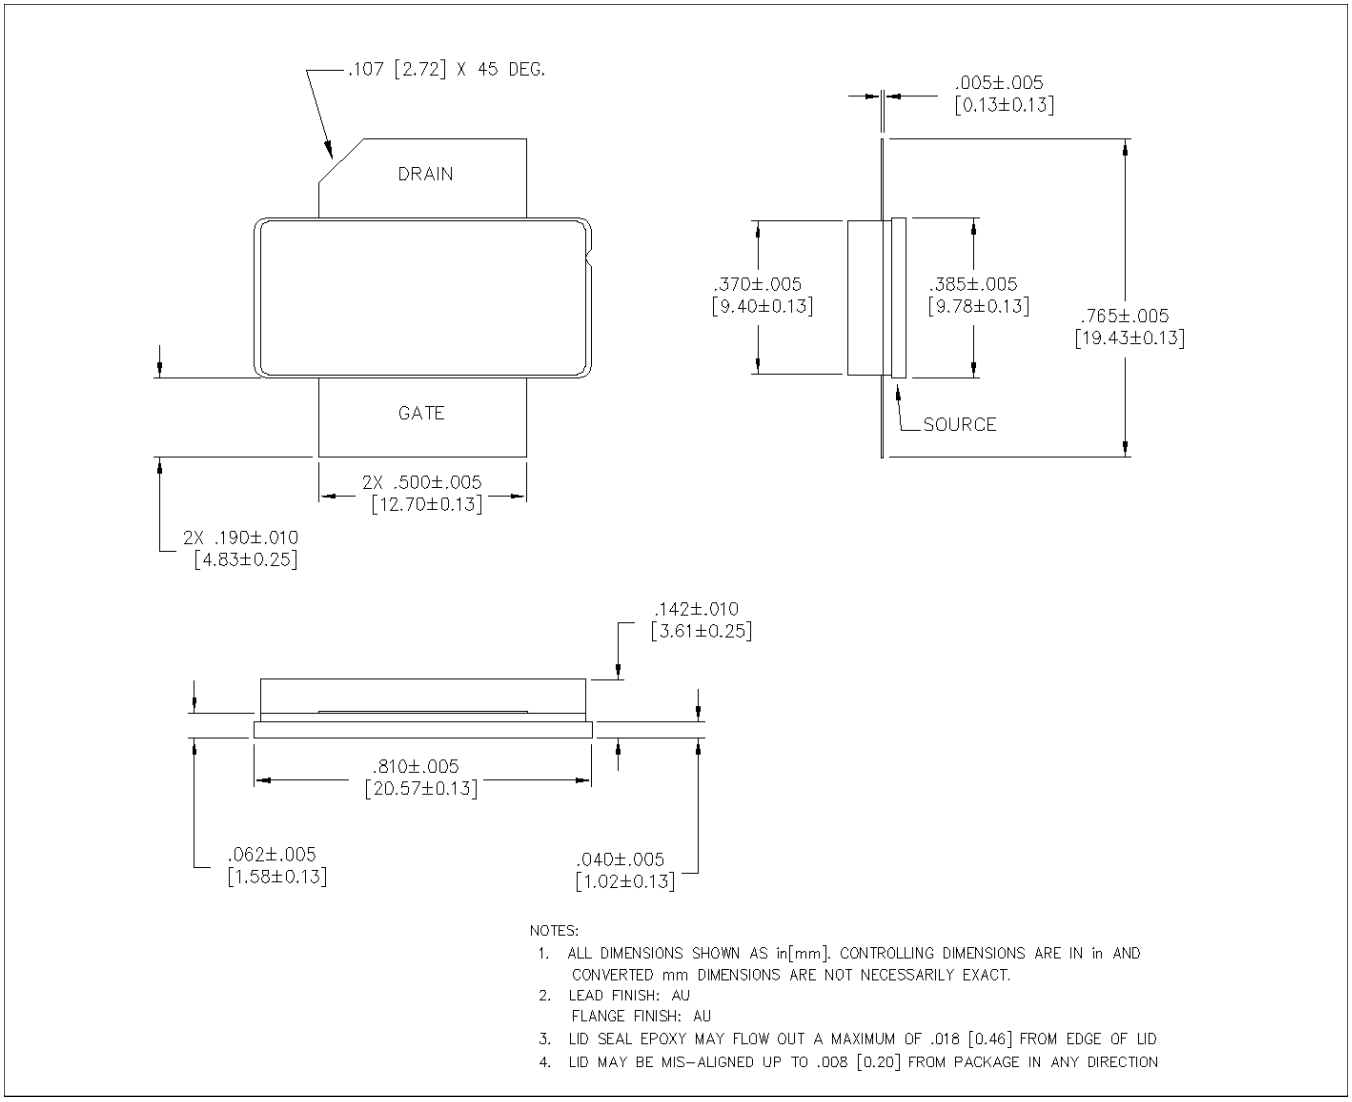

† Reference Application Note AN0004363 for lead-free solder reflow recommendations.
Meets JEDEC moisture sensitivity level 3 requirements.
Plating is Au.

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support

MACOM Technology Solutions Inc. (“MACOM”). All rights reserved.
These materials are provided in connection with MACOM’s products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support