

Low Loss SMA Male Right Angle to N Female Bulkhead
Cable Assembly using 100 Series Coax, 5 FT



LCCA30385-FT5

Configuration


- Connector 1: SMA Male Right Angle
- Connector 2: N Female Bulkhead
- Cable Type: CA-100

Features

- Max Frequency 3 GHz
- LMR-100 Equivalent
- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Low Insertion Loss
- Double Shielded
- PVC Jacket

Applications

- General Purpose
- Laboratory Use
- Antenna Installations
- Land Mobile Radio & Other Communication Systems
- Cellular & Wi-Fi Systems

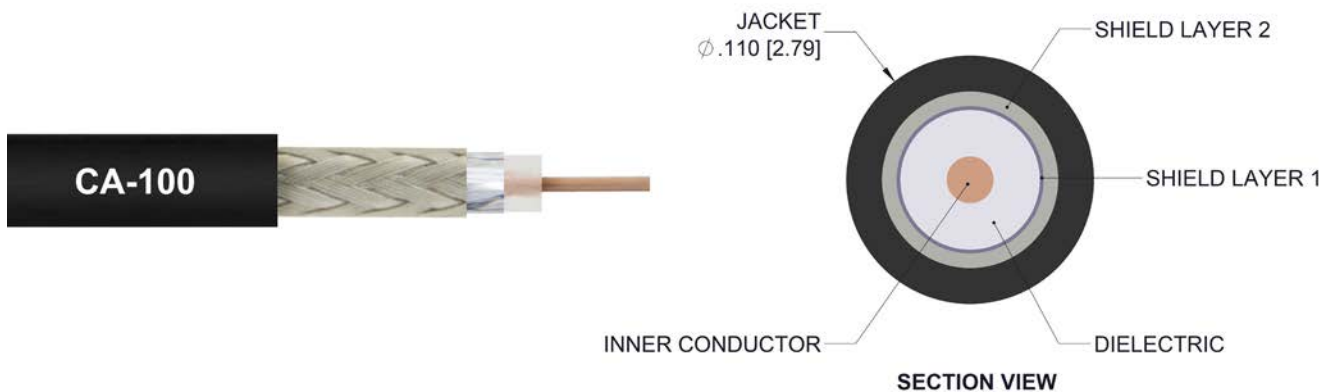

Description

L-com's LCCA30385-FT5 is a low loss SMA male right angle to N female bulkhead cable assembly using 100 series coax, 5 FT and ships same-day. The CA-100 coax of this SMA cable uses the PE dielectric with a VoP of 66%, resulting in very low insertion loss compared to solid dielectrics. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com SMA to N cable assembly has a male to female gender configuration with flexible CA-100 series coax and operates to 3 GHz. The double shield of this SMA cable is layered by tinned copper braid over aluminum tape providing shielding effectiveness greater than 90dB. L-com's RF cable assembly with N bulkhead interface enables system designers to have external connections on their product enclosures or to be used for other rack mount and panel mount applications. This right angle SMA cable interface on the CA-100 coax allows for easier connections in tight spaces.

Custom versions of this SMA male to SMA female cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30385-FT5 L-com Low Loss SMA Male Right Angle to N Female Bulkhead Cable Assembly using 100 Series Coax, 5 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

Low Loss SMA Male Right Angle to N Female Bulkhead
Cable Assembly using 100 Series Coax, 5 FT



LCCA30385-FT5

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|----------------|---------|-----------------------|
| Frequency Range | DC | | 3 | GHz |
| VSWR | | | 1.5:1 | |
| Velocity of Propagation | | 66 | | % |
| RF Shielding | 90 | | | dB |
| Capacitance | | 30.8 [101.05] | | pF/ft [pF/m] |
| DC Resistance Inner Conductor | | 81.07 [265.98] | | Ohms/1000ft [Ohms/Km] |
| DC Resistance Outer Conductor | | 9.51 [31.2] | | Ohms/1000ft [Ohms/Km] |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|-----|------|------|------|-----|-------|
| Frequency | 0.1 | 0.25 | 0.5 | 1 | 2.5 | GHz |
| Insertion Loss (Typ.) | 0.7 | 0.94 | 1.19 | 1.57 | 2.4 | dB |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in the assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

Mechanical Specifications

Cable Assembly

| | |
|----------|---------------------|
| Length | 60 in [152.4 cm] |
| Diameter | 0.81 in [20.57 mm] |
| Weight | 0.085 lbs [38.56 g] |

Cable

| | |
|--------------------------------------|---------------------|
| Cable Type | CA-100 |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper Clad Steel |
| Dielectric Type | PE |
| Number of Shields | 2 |
| Shield Layer 1 | Aluminum Tape |
| Shield Layer 2 | Tinned Copper Braid |
| Jacket Material | PVC, Black |
| Jacket Diameter | 0.109 in [2.77 mm] |
| One Time Minimum Bend Radius | 0.55 in [13.97 mm] |

Low Loss SMA Male Right Angle to N Female Bulkhead
Cable Assembly using 100 Series Coax, 5 FT



LCCA30385-FT5

| | |
|------------------------------|------------------------|
| Repeated Minimum Bend Radius | 1 in [25.4 mm] |
| Bending Moment | 0.1 lbs-ft [0.14 N-m] |
| Flat Plate Crush | 10 lbs/in [0.18 Kg/mm] |
| Tensile Strength | 15 lbs [6.8 Kg] |

Connectors

| Description | Connector 1 | Connector 2 |
|-------------------------------|----------------------|-------------------|
| Type | SMA Male Right Angle | N Female Bulkhead |
| Specification | MIL-STD-348A | MIL-STD-348A |
| Impedance | 50 Ohms | 50 Ohms |
| Mating Cycles | | 100 |
| Contact Material and Plating | Brass, Gold | Brass, Gold |
| Contact Plating Specification | 50µ in. minimum | 30µ in. minimum |
| Dielectric Type | Teflon | Teflon |
| Body Material and Plating | Brass, Nickel | Brass, Nickel |
| Body Plating Specification | 100µ in. minimum | 100µ in. minimum |
| Hex Size | 5/16 in | |
| Torque | 5 in-lbs 0.57 Nm | |

Environmental Specifications

Temperature

Operating Range -20 to +70 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Low Loss SMA Male Right Angle to N Female Bulkhead Cable Assembly using 100 Series Coax, 5 FT



LCCA30385-FT5

How to Order

Part Number Configuration:

LCCA30385 - xx uu



Example: LCCA30385-12 = 12 inches long cable
LCCA30385-100cm = 100 cm long cable

Low Loss SMA Male Right Angle to N Female Bulkhead Cable Assembly using 100 Series Coax, 5 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

L-com CAD Drawing

