


FEATURES 特征

- Monolithic structure for high reliability.
迭层独石结构、高度可靠性
- No cross coupling due to magnetic shield.
良好的磁屏蔽，无交叉耦合
- Perfect shape for mounting with no directionality.
无引线结构，适合表面安装
- Excellent solderability and high heat resistance.
良好的焊接性
- Operating Temp : -40°C~+85°C (Including self heating)
工作温度范围:-40°C~+85°C(包括自身温度上升)



APPLICATIONS 用途

- Widely use in Communications, Video and audio equipment, Computer Consumer Electronics, etc.
广泛运用于通讯、视频、音频、计算机、消费电子等领域

PART NUMBERING 产品型号

APQM	21	NN	R82	K	10	D
①	②	③	④	⑤	⑥	⑦

① Series Name	
APQM	Chip Ferrite Inductor

② External Dimensions [inch]	
18	1608 [0603]
21	2012 [0805]

③ Product identification code	
NN	

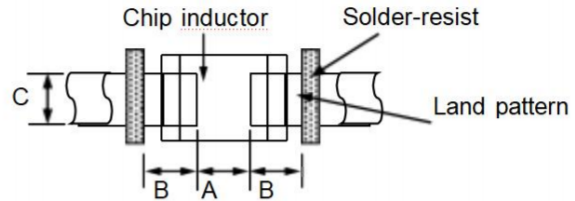

⑤ Inductance Tolerance	
K	10%
M	20%

④ Inductance	
Code (example)	Nominal inductance [μ H]
R82	0.82 μ H
1R0	1.0 μ H

⑥ Internal code	
00,10	

⑦ Packaging	
D	Tape & Reel

DIMENSIONS & RECOMMENDED LAND PATTERN 尺寸及推荐焊盘



Unit: mm

Series	Dimensions				Recommended Land Pattern		
	L	W	H	a	A	B	C
APQM18NN	1.60±0.15	0.8±0.15	0.8±0.15	0.3±0.2	0.6~0.8	0.6~0.8	0.6~0.8
APQM21NN	2.0(+0.3,-0.1)	1.25±0.2	0.85±0.2	0.5±0.3	0.8~1.2	0.8~1.2	0.9~1.6

ELECTRICAL CHARACTERISTICS 特性规格表

● APQM18NN Series

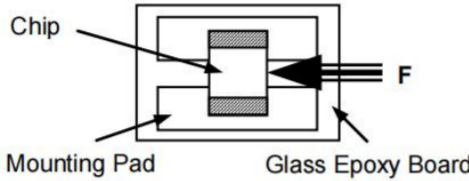
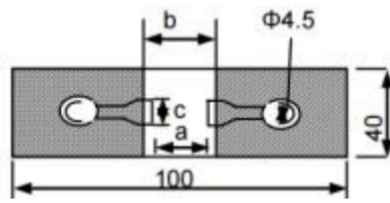
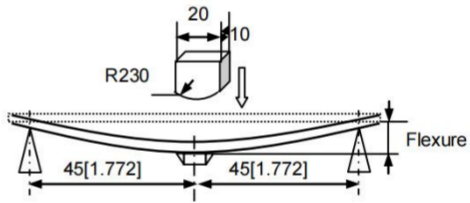

Part Number	Inductance (μH)	L,Q Test Freq./L/Q (MHz)	DC resistance (Ω)	Rated Current (mA)	S.R.F (MHz)	Quality Factor Min.	Thickness (mm)
			Max.	Max.	Min.	Q	
APQM18NN47NM00D	0.047±20%	50	0.3	50	260	10	0.8±0.15
APQM18NN68NM00D	0.068±20%	50	0.3	50	250	10	0.8±0.15
APQM18NN82NM00D	0.082±20%	50	0.3	50	245	10	0.8±0.15
APQM18NNR10K00D	0.1±10%	25	0.5	50	240	15	0.8±0.15
APQM18NNR12K00D	0.12±10%	25	0.5	50	205	15	0.8±0.15
APQM18NNR15K00D	0.15±10%	25	0.6	50	180	15	0.8±0.15
APQM18NNR18K00D	0.18±10%	25	0.6	50	165	15	0.8±0.15
APQM18NNR22K00D	0.22±10%	25	0.8	50	150	15	0.8±0.15
APQM18NNR27K00D	0.27±10%	25	0.8	50	136	15	0.8±0.15
APQM18NNR33K00D	0.33±10%	25	0.85	35	125	15	0.8±0.15
APQM18NNR39K00D	0.39±10%	25	1	35	110	15	0.8±0.15
APQM18NNR47K00D	0.47±10%	25	1.35	35	105	15	0.8±0.15
APQM18NNR56K00D	0.56±10%	25	1.55	35	95	15	0.8±0.15
APQM18NNR68K00D	0.68±10%	25	1.7	35	90	15	0.8±0.15
APQM18NNR82K00D	0.82±10%	25	2.1	35	85	15	0.8±0.15
APQM18NN1R0K00D	1.0±10%	10	0.6	25	75	35	0.8±0.15
APQM18NN1R2K00D	1.2±10%	10	0.8	25	65	35	0.8±0.15
APQM18NN1R5K00D	1.5±10%	10	0.8	25	60	35	0.8±0.15
APQM18NN1R8K00D	1.8±10%	10	0.95	25	55	35	0.8±0.15
APQM18NN2R2K00D	2.2±10%	10	1.15	15	50	35	0.8±0.15

ELECTRICAL CHARACTERISTICS 特性规格表

● APQM21NN Series

Part Number	Inductance (μH)	L,Q Test Freq. L/Q (MHz)	DC resistance (Ω)	Rated Current (mA)	S.R.F (MHz)	Quality Factor Min.	Thickness (mm)
			Max.	Max.	Min.	Q	
APQM21NNR10K10D	0.1±10%	25	0.3	250	235	20	0.85±0.2
APQM21NNR12K10D	0.12±10%	25	0.3	250	220	20	0.85±0.2
APQM21NNR15K10D	0.15±10%	25	0.4	250	200	20	0.85±0.2
APQM21NNR18K10D	0.18±10%	25	0.4	250	185	20	0.85±0.2
APQM21NNR22K10D	0.22±10%	25	0.5	250	170	20	0.85±0.2
APQM21NNR27K10D	0.27±10%	25	0.5	250	150	20	0.85±0.2
APQM21NNR33K10D	0.33±10%	25	0.55	250	145	20	0.85±0.2
APQM21NNR39K10D	0.39±10%	25	0.65	200	135	25	0.85±0.2
APQM21NNR47K10D	0.47±10%	25	0.65	200	125	25	0.85±0.2
APQM21NNR56K10D	0.56±10%	25	0.75	150	115	25	0.85±0.2
APQM21NNR68K10D	0.68±10%	25	0.8	150	105	25	0.85±0.2
APQM21NNR82K10D	0.82±10%	25	1	150	100	25	0.85±0.2
APQM21NN1R0K10D	1.0±10%	10	0.4	50	75	45	0.85±0.2
APQM21NN1R2K10D	1.2±10%	10	0.5	50	65	45	0.85±0.2
APQM21NN1R5K10D	1.5±10%	10	0.5	50	60	45	0.85±0.2
APQM21NN1R8K10D	1.8±10%	10	0.6	50	55	45	0.85±0.2
APQM21NN2R2K10D	2.2±10%	10	0.65	30	50	45	0.85±0.2
APQM21NN2R7K10D	2.7±10%	10	0.75	30	45	45	0.85±0.2
APQM21NN3R3K10D	3.3±10%	10	0.8	30	41	45	0.85±0.2
APQM21NN3R9K10D	3.9±10%	10	0.9	30	38	45	0.85±0.2
APQM21NN4R7K10D	4.7±10%	10	1	30	35	45	0.85±0.2

RELIABILITY TEST 可靠性测试

Items	Requirements	Test Methods and Remarks												
1. Terminal Strength	<p>No removal or split of the termination or other defects shall occur.</p>  <p>Fig.1-1</p>	<ol style="list-style-type: none"> Solder the inductor to the testing jig (glass epoxy board shown in Fig.1-1) using leadfree solder. Then apply a force in the direction of the arrow. 5N force for APQM18 series. 10N force for APQM21 series. Keep time: 10+1s. Speed: 1.0mm/s. 												
2. Resistance to Flexure	<p>No visible mechanical damage.</p> <p style="text-align: center;">Unit: mm [inch]</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Type</th> <th>a</th> <th>b</th> <th>c</th> </tr> </thead> <tbody> <tr> <td>1608[0603]</td> <td>1.0</td> <td>3.0</td> <td>1.2</td> </tr> <tr> <td>2012[0805]</td> <td>1.2</td> <td>4.0</td> <td>1.65</td> </tr> </tbody> </table>  <p>Fig.2-1</p>	Type	a	b	c	1608[0603]	1.0	3.0	1.2	2012[0805]	1.2	4.0	1.65	<ol style="list-style-type: none"> Solder the inductor to the test jig (glass epoxy board shown in Fig.2-1) Using a leadfree solder. Then apply a force in the direction shown Fig.2-2. Flexure: 2mm. Pressurizing Speed: 0.5mm/sec. Keep time: 30 sec.  <p>Fig.2-2</p>
Type	a	b	c											
1608[0603]	1.0	3.0	1.2											
2012[0805]	1.2	4.0	1.65											
3. Vibration	<ol style="list-style-type: none"> No visible mechanical damage. Inductance change: Within $\pm 10\%$ Q factor change: Within $\pm 30\%$  <p>Fig. 3-1</p>	<ol style="list-style-type: none"> Solder the inductor to the testing jig (glass epoxy board shown in Fig.3-1) using leadfree solder. The inductor shall be subjected to a simple harmonic motion having total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55 Hz. The frequency range from 10 to 55 Hz and return to 10 Hz shall be traversed in approximately 1 minute. This motion shall be applied for a period of 2 hours in each 3 mutually perpendicular directions (total of 6 hours). 												
4. Dropping	<ol style="list-style-type: none"> No visible mechanical damage. Inductance change: Within $\pm 10\%$ Q factor change: Within $\pm 30\%$ 	Drop chip inductor 10 times on a concrete floor from a height of 100 cm.												
5. Temperature	Inductance change should be within $\pm 20\%$ of initial value measuring at 20°C .	<p>Temperature range: -40°C~ +85°C</p> <p>Reference temperature: +20°C</p>												
6. Solderability	<ol style="list-style-type: none"> No visible mechanical damage. Wetting shall exceed 95% coverage. 	<ol style="list-style-type: none"> Solder temperature: 240\pm2°C Duration: 3 sec. Solder: Sn/3.0Ag/0.5Cu. Flux: 25% Resin and 75% ethanol in weight. 												

RELIABILITY TEST 可靠性测试

Items	Requirements	Test Methods and Remarks
7. Resistance to Soldering Heat	① No visible mechanical damage. ② Wetting shall exceed 95% coverage. ③ Inductance change: Within $\pm 10\%$. ④ Q factor change: Within $\pm 30\%$	① Solder temperature: $260 \pm 3^\circ\text{C}$. ② Duration: 5 sec. ③ Solder: Sn/3.0Ag/0.5Cu. ④ Flux: 25% Resin and 75% ethanol in weight. ⑤ The chip shall be stabilized at normal condition for 1~2 hours before measuring.
8. Thermal Shock	① No mechanical damage. ② Inductance change: Within $\pm 10\%$. ③ Q factor change: Within $\pm 30\%$.	<p style="text-align: center;">Fig.8-1</p> ① Temperature, Time: (See Fig.8-1) -40°C for 30 ± 3 min \rightarrow 85°C for 30 ± 3 min. ② Transforming interval: 20 sec.(max.). ③ Tested cycle: 100 cycles. ④ The chip shall be stabilized at normal condition for 1~2 hours before measuring.
9. Resistance to Low Temperature	① No mechanical damage. ② Inductance change: Within $\pm 10\%$. ③ Q factor change: Within $\pm 30\%$.	① Temperature: $-40 \pm 2^\circ\text{C}$ ② Duration: 1000^{+24} hours. ③ The chip shall be stabilized at normal condition for 1~2 hours before measuring.
10. Resistance to High Temperature	① No mechanical damage. ② Inductance change: Within $\pm 10\%$. ③ Q factor change: Within $\pm 30\%$.	① Temperature: $85 \pm 2^\circ\text{C}$ ② Duration: 1000^{+24} hours. ③ The chip shall be stabilized at normal condition for 1~2 hours before measuring.
11. Damp Heat (Steady States)	① No visible mechanical damage. ② Inductance change: Within $\pm 10\%$. ③ Q factor change: Within $\pm 30\%$.	① Temperature: $60 \pm 2^\circ\text{C}$ ② Humidity: 90% to 95% RH. ③ Duration: 1000^{+24} hours. ④ The chip shall be stabilized at normal condition for 1~2 hours before measuring.
12. Loading Under Damp Heat	① No visible mechanical damage. ② Inductance change: within $\pm 10\%$ for inductance $\leq 12\mu\text{H}$ within $\pm 15\%$ for inductance $\geq 15\mu\text{H}$. ③ Q factor change: Within $\pm 30\%$.	① Temperature: $60 \pm 2^\circ\text{C}$ ② Humidity: 90% to 95% RH. ③ Duration: 1000^{+24} hours. ④ Applied current: Rated current. ⑤ The chip shall be stabilized at normal condition for 1~2 hours before measuring.
13. Loading at High Temperature (Life Test)	① No visible mechanical damage. ② Inductance change: within $\pm 10\%$ for inductance $\leq 12\mu\text{H}$ within $\pm 15\%$ for inductance $\geq 15\mu\text{H}$. ③ Q factor change: Within $\pm 30\%$.	① Temperature: $85 \pm 2^\circ\text{C}$ ② Duration: 1000^{+24} hours. ③ Applied current: Rated current. ④ The chip shall be stabilized at normal condition for 1~2 hours before measuring.

Recommended Soldering Technologies 回流焊建议

Reflowing Profile	
<ul style="list-style-type: none"> ◆ Preheat condition: 150~200°C/60~120sec. ◆ Allowed time above 217°C: 60~90sec. ◆ Max temp: 260°C ◆ Max time at max temp: 10sec. ◆ Solder paste: Sn/3.0Ag/0.5Cu ◆ Allowed Reflow time: 2x max <p>Note: The reflow profile in the above table is only for qualification and is not meant to specify board assembly profiles. Actual board assembly profiles must be based on the customer's specific board design, solder paste and process, and should not exceed the parameters as the Reflow profile shows.</p>	
Iron Soldering Profile	
<ul style="list-style-type: none"> ◆ Iron soldering power: Max.30W ◆ Pre-heating: 150 °C / 60sec. ◆ Soldering Tip temperature: 350°C Max. ◆ Soldering time: 3sec Max. ◆ Solder paste: Sn/3.0Ag/0.5Cu ◆ Max.1 times for iron soldering <p>Note: Take care not to apply the tip of the soldering iron to the terminal electrodes.</p>	

■ Safety Reminders 注意事项

SAFETY REMINDERS

- The storage period is within 12 months. Be sure to follow the storage conditions (temperature: 15 to 35°C, humidity: 75% RH or less). If the storage period elapses, the soldering of the terminal electrodes may deteriorate.
- Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- This product is not designed for production processes involving ultrasonic welding, as high-frequency vibration may cause application issues such as product detachment and breakage.
- Carefully layout the coil for the circuit board design of the non-magnetic shield type. A malfunction may occur due to magnetic interference.
- Use a wrist band to discharge static electricity in your body through the grounding wire.
- Do not expose the products to magnets or magnetic fields.
- Do not use for a purpose outside of the contents regulated in the delivery specifications.
- The products listed on this catalog are intended for use in general electronic equipment, under a normal operation and use condition.

The Company shall not guarantee the suitability, performance, or quality for the following applications that require a high level of safety and reliability, or where equipment failure, malfunction, or abnormal operation may cause damage to human life, physical well-being, or property, and may have significant social impacts (hereinafter referred to as "specific applications"). If you intend to use this product in the application scenarios listed below, or if you have special requirements exceeding the scope or conditions specified in each product catalog, please contact us.

- (1) Aerospace/aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment
- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.