# ST-8ES1N8A6100S - Device connector front mounting

1613614

https://www.phoenixcontact.com/us/products/1613614

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, straight, for standard and SPEEDCON interlock, M17, number of positions: 5+3+PE, contact connection type: Socket, Axial O-ring, Central fixing, shielded: yes, number of positions: 9, connection method: Crimp connection, series: ST, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242801

## Your advantages

- Application-specific panel mounting optionally with thread or anti-rotation protection and lock nut
- Consistent EMC protection for reliable connection solutions in the industrial environment
- Crimping connection: vibration- and temperature-resistant assembly

## Commercial data

| | |
|---|---|
| Item number | 1613614 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | AB32 |
| Product key | ABRBEL |
| Catalog page | Page 139 (C-2-2019) |
| GTIN | 4046356442213 |
| Weight per piece (including packing) | 30.7 g |
| Weight per piece (excluding packing) | 20.2 g |
| Customs tariff number | 85366990 |
| Country of origin | DE |

## Technical data

### Notes

| | |
|---|---|
| Order information: | Order crimp contacts 5 x 0.6 mm, 4 x Ø 1 mm separately |

Safety note

| | |
|---|---|
| Safety note | WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property. |
| | • WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible. |
| | • WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product. |
| | • The products are suitable for applications in plant, controller, and electrical device engineering. |
| | • When operating the connectors in outdoor applications, they must be separately protected against environmental influences. |
| | • Assembled products may not be manipulated or improperly opened. |
| | • Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). |
| | • When using the product in direct connection with third-party manufacturers, the user is responsible. |
| | • For operating voltages > 50 V AC, conductive connector housings must be grounded |
| | • Ensure that the protective or functional ground has been properly connected. |
| | • VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector |
| | • Only use tools recommended by Phoenix Contact |
| | • The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product. |
| | • Operate the connector only when it is fully plugged in and interlocked. |
| | • Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards. |
| | • Observe the minimum bending radius of the cable. Lay the cable without twisting it. |
| | • The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting |

| | |
|---|---|
| | warnings (e.g. DIN EN ISO 13732-1:2008-12). |

## Mounting

| | |
|---|---|
| Mounting type | Front mounting |
| Mounting | Central fixing |

## Product properties

| | |
|---|---|
| Product type | Circular connectors (device side) |
| Series | ST |
| Application | Power |
| Number of positions | 9 |
| Connection profile | 5+3+PE |
| Shielded | yes |
| Coding | N |
| Thread type | M17 |

## Material specifications

| | |
|---|---|
| Seal material | FPM |
| Housing material | Metal |

## Electrical properties

### Contact

| | |
|---|---|
| Contact diameter | 1 mm |
| Max. current | 14 A |
| Nominal voltage $U_N$ | 630 V |
| Overvoltage category | III |
| Degree of pollution | 3 |
| Rated surge voltage | 6 kV |

### Contact

| | |
|---|---|
| Contact diameter | 0.6 mm |
| Max. current | 3.6 A |
| Nominal voltage $U_N$ | 60 V |
| Overvoltage category | III |
| Degree of pollution | 3 |
| Rated surge voltage | 1.5 kV |

## Connection data

### Conductor connection

| | |
|---|---|
| Connection method | Crimp connection |
| Contact connection type | Socket |

## Connector

| | |
|---|---|
| Type | straight |

| | |
|---|---|
| Direction of rotation | Standard |

Connection 1

| | |
|---|---|
| Head design | Socket |

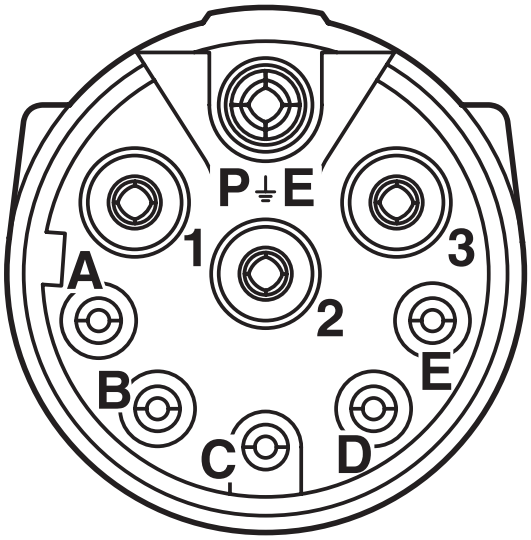
## Environmental and real-life conditions

Ambient conditions

| | |
|---|---|
| Degree of protection | IP67 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Ambient temperature (storage/transport) | 15 °C ... 25 °C |
| Altitude | 2000 m |
| Permissible humidity (storage/transport) | 50 % ... 65 % |

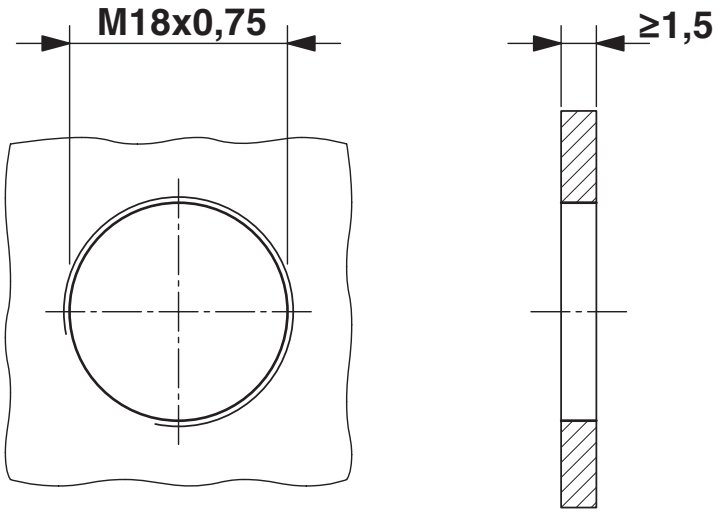
## Drawings

Schematic diagram



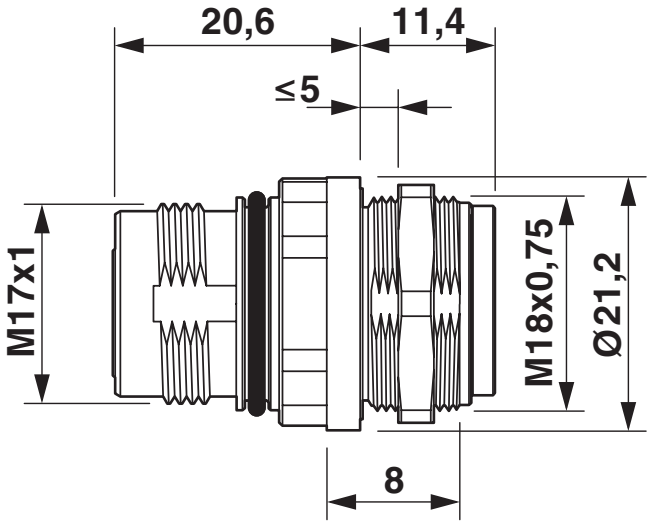

Connector pin assignment

Dimensional drawing



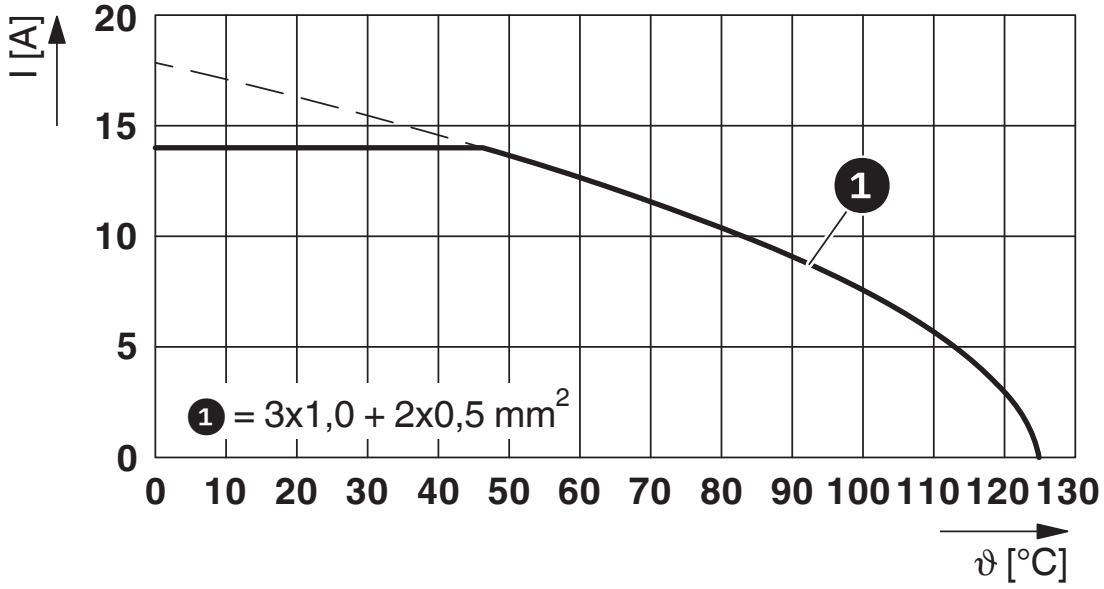

Installation dimensions: mounting with thread

Dimensional drawing



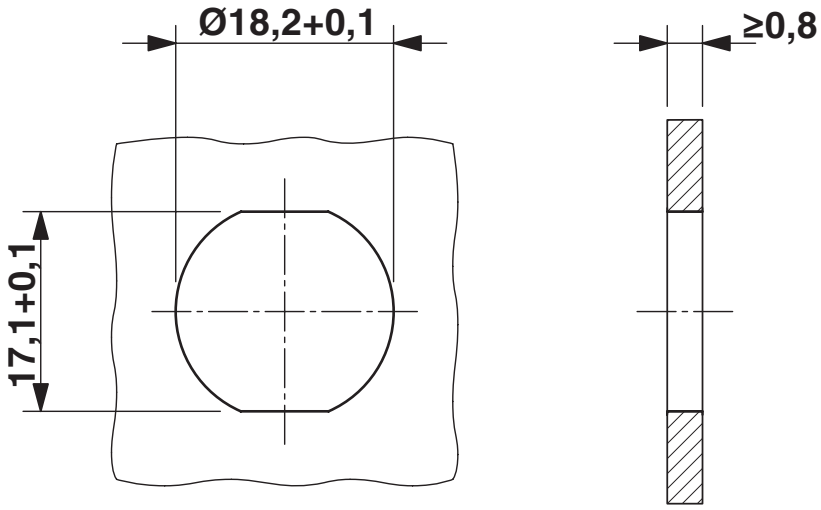

Dimensional drawing

Diagram




I = current strength, ϑ = ambient temperature, 3x 14 A + 2x 2 A constant

Dimensional drawing




Installation dimensions: mounting with anti-rotation protection and locking nut

## Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1613614

**UL Recognized**
Approval ID: E153698-20140124

| | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|---|---|---|---|---|
| Power | 600 V | 3.5 A | - | - |
| Signal | 60 V | 3.5 A | - | - |

**cUL Recognized**
Approval ID: E153698-20140124

| | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|---|---|---|---|---|
| Power | 600 V | 3.5 A | - | - |
| Signal | 60 V | 3.5 A | - | - |

**cUL Recognized**
Approval ID: E335019-20111129

| | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|---|---|---|---|---|
| Power | 600 V | 3.5 A | - | - |
| Signal | 60 V | 3.5 A | - | - |

**UL Recognized**
Approval ID: E335019-20111129

| | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|---|---|---|---|---|
| Power | 600 V | 3.5 A | - | - |
| Signal | 60 V | 3.5 A | - | - |

**UL Listed**
Approval ID: E468743-20210825

| | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|---|---|---|---|---|
| Power | 600 V | 10 A | - | 18 - 18 |
| Signal | 60 V | 2 A | - | 20 - 20 |

**cUL Listed**
Approval ID: E468743-20210825

| | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
|---|---|---|---|---|
| Power | 600 V | 8 A | 18 - 18 | - |
| Signal | 60 V | 2 A | 20 - 20 | - |

cULus Listed

## Classifications

### ECLASS

| | |
|---|---|
| ECLASS-11.0 | 27440102 |
| ECLASS-12.0 | 27440116 |
| ECLASS-13.0 | 27440116 |

### ETIM

| | |
|---|---|
| ETIM 9.0 | EC002635 |

### UNSPSC

| | |
|---|---|
| UNSPSC 21.0 | 39121400 |

## Environmental product compliance

EU RoHS

| | |
|---|---|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |

China RoHS

| | |
|---|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|---|---|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | 23c3a291-950f-4684-ae90-7416c750b268 |


Phoenix Contact 2025 © - all rights reserved
https://www.phoenixcontact.com



Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com