


SOT-23



Features

- Z 60V/0.2A, $R_{DS(ON)} = 7.5\Omega$ (MAX) @ $V_{GS} = 10V, I_d = 0.5A$
- $R_{DS(ON)} = 7.5\Omega$ (MAX) @ $V_{GS} = 5V, I_d = 0.05A$
- Z Super High dense cell design for extremely low $R_{DS(ON)}$.
- Z Reliable and Rugged.
- Z SOT-23 for Surface Mount Package.

MAXIMUM RANTINGS

Parameter	Symbol	Limit	Units
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous	I_D	0.2	A
Power Dissipation	P_D	0.225	W
Thermal Resistance from Junctin to Ambient	$R_{\theta JA}$	556	/ /W
Junction Temperature	T_J	150	/
Storage Temperature	T_{stg}	-50~+150	

Electrical Characteristics

Parameter	Symbol	Test Conditions	Min	Typ.	Max	Units
Off Characteristics						
Drain to Source Breakdown Voltage	BVDSS	$V_{GS}=0V, I_D=250\mu A$	60	-	-	V
Zero-Gate Voltage Drain Current	IDSS	$V_{DS}=60V, V_{GS}=0V$	-	-	1	μA
Gate Body Leakage Current, Forward	IGSSF	$V_{GS}=20V, V_{DS}=0V$	-	-	100	nA
Gate Body Leakage Current, Reverse	IGSSR	$V_{GS}=-20V, V_{DS}=0V$	-	-	-100	nA
On Characteristics						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{GS}=V_{DS}, I_D=250\mu A$	1	-		V
Static Drain-source On-Resistance *	$R_{DS(ON)}$	$V_{GS}=10V, I_D=0.5A$	-		7.5	Ω
		$V_{GS}=5V, I_D=0.05A$	-		7.5	Ω
Drain-Source Diode Characteristics and Maximum Ratings						
Drain-Source Diode Forward Voltage	VSD	$V_{GS}=0V, I_S=0.2A$			2.5	V

Notes :

*Pulse Test : Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.

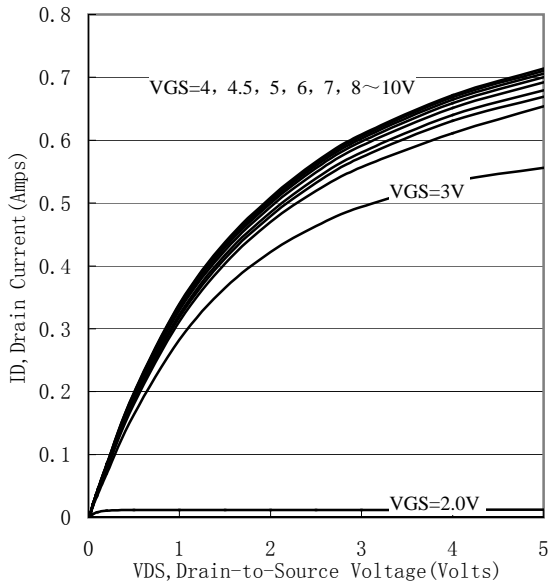


Figure 1. Output Characteristics

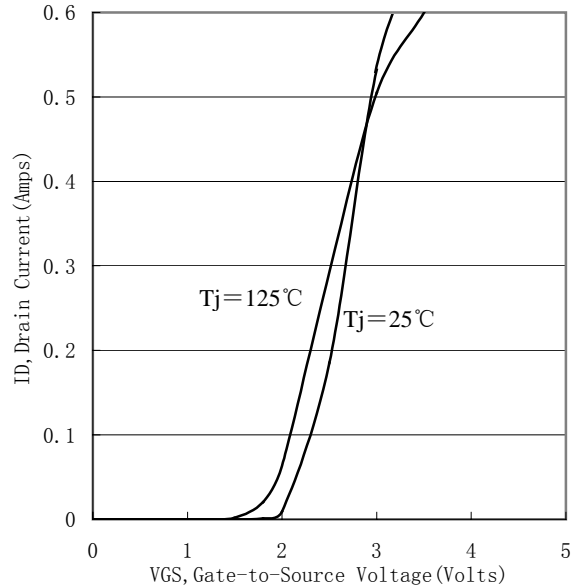


Figure 2. Transfer Characteristics

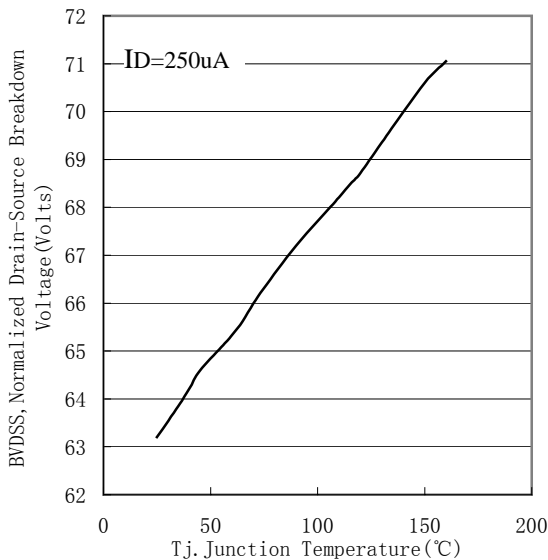


Figure 3. Breakdown Voltage Variation with Temperature

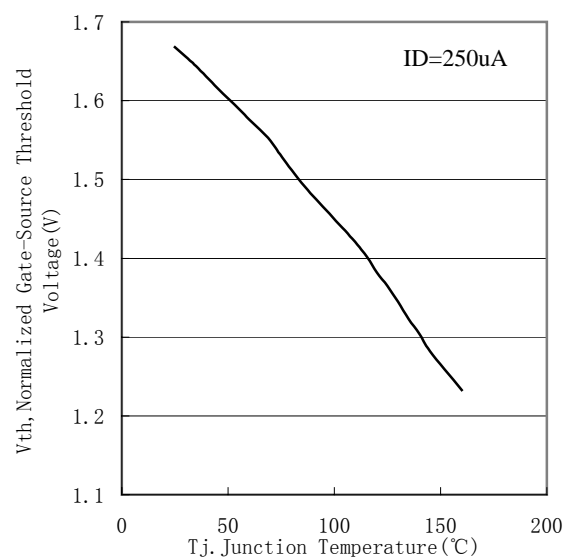


Figure 4. Gate Threshold Variation with Temperature

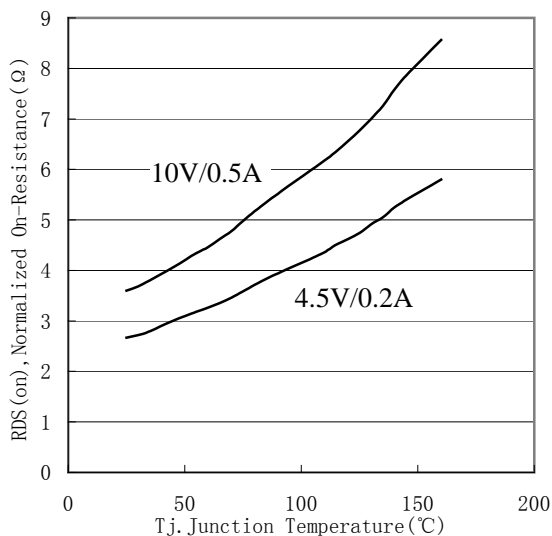


Figure 5. On-Resistance Variation with Temperature

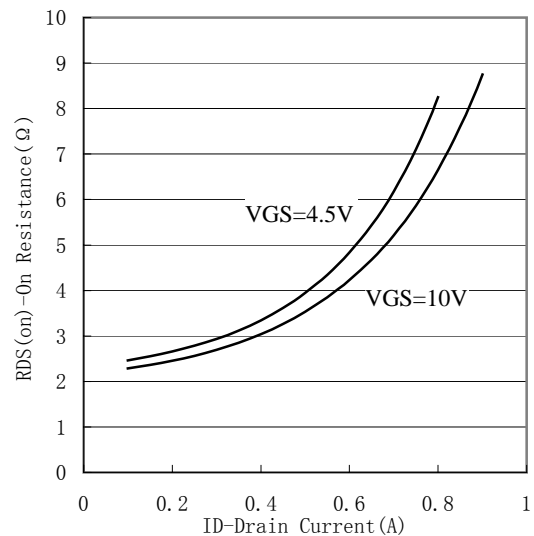


Figure 6. On-Resistance vs. Drain Current

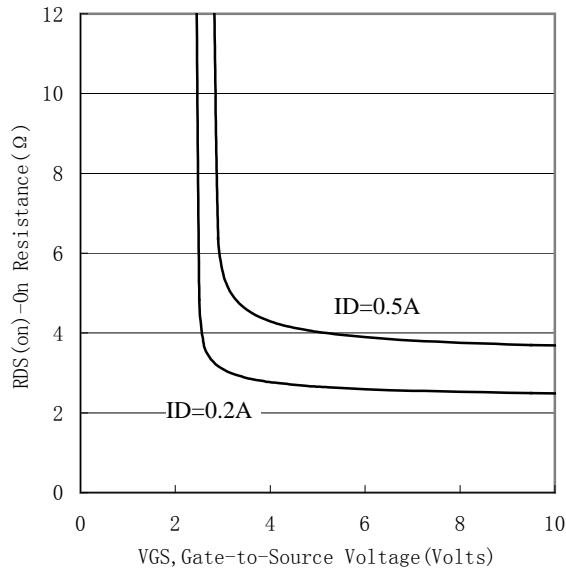


Figure 7. On-Resistance vs. Gate-to-Source Voltage

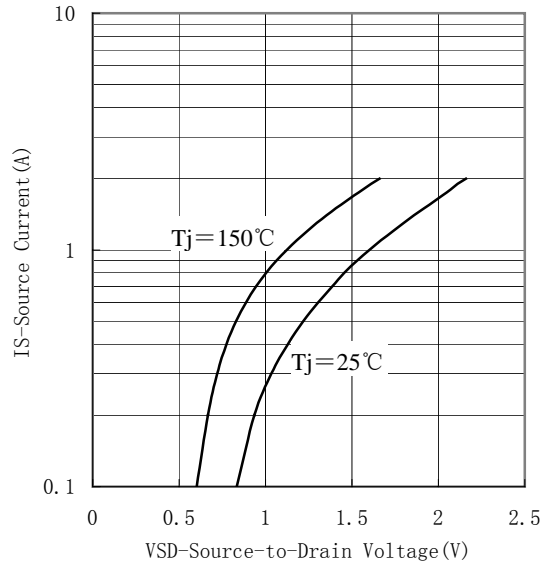


Figure 8. Source-Drain Diode Forward Voltage

SOT-23 PACKAGE OUTLINE Plastic surface mounted package

SOT-23

81, 70PP