

#### 120V NPN MEDIUM POWER DARLINGTON TRANSISTOR IN SOT23F

#### **Features**

- BV<sub>CEO</sub> > 120V
- I<sub>C</sub> = 1A Continuous Collector Current
- V<sub>CE(SAT)</sub> < 1.5V @ 1A</li>
- R<sub>CE(SAT)</sub> = 38mΩ
- 1.5W Power Dissipation
- Complementary PNP Type: ZXTP05120FF
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- Qualified to AEC-Q101 Standards for High Reliability

#### **Mechanical Data**

- Case: SOT23F
- Case Material: Molded Plastic, "Green" Molding Compound.
   UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208<sup>(3)</sup>
- Weight: 0.012 grams (Approximate)

### **Description**

This high performance NPN Darlington transistor is housed in the small outline SOT23 flat package for applications where space is at a premium.


### **Applications**

- · Lamp, Relay and Solenoid Drive
- Lighting


#### SOT23F



Top View



Device Symbol



Top View Pin Configuration

#### Ordering Information (Note 4)

Part Number	Compliance	Marking	Reel Size (inches)	Tape Width (mm)	Quantity per Reel
ZXTN04120HFFTA	AEC-Q101	1F6	7	8	3,000

Notes:

- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.
- 2. See http://www.diodes.com/quality/lead\_free.html for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
- 4. For packaging details, go to our website at http://www.diodes.com/products/packages.html.

### **Marking Information**

# 1F6 | Sot 23F

1F6 = Product Type Marking Code YW = Date Code Marking

 $\underline{Y} = \text{Year} : 0 \sim 9$ 

W = Week : A~Z : 1~26 a~z : 27~52

z represents 52 & 53 week



# Absolute Maximum Ratings (@T<sub>A</sub> = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	$V_{CBO}$	140	V
Collector-Emitter Voltage	V <sub>CEO</sub>	120	V
Emitter-Base Voltage	V <sub>EBO</sub>	10	V
Continuous Collector Current	I <sub>C</sub>	1	Α
Peak Pulse Current	I <sub>CM</sub>	4	Α
Base Current	I <sub>B</sub>	0.5	Α

#### Thermal Characteristics (@T<sub>A</sub> = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit		
	(Note 5)		0.84 6.72		
Power Dissipation	(Note 6)	5	1.34 10.72	W mW/°C	
Linear Derating Factor	(Note 7)	$P_D$	1.50 12.0		
	(Note 8)		2.0 16.0		
	(Note 5)		149	900	
The word Desistance I wasting to Austriant	(Note 6)	<b>D</b>	93		
Thermal Resistance, Junction to Ambient	(Note 7)	$R_{\theta JA}$	83	°C/W	
	(Note 8)		60		
Thermal Resistance, Junction to Lead (Note 9)		R <sub>0JL</sub>	43.8	°C/W	
Operating and Storage Temperature Range	T <sub>J,</sub> T <sub>STG</sub>	-55 to +150	°C		

#### ESD Ratings (Note 10)


Characteristic	Symbol	Value	Unit	JEDEC Class
Electrostatic Discharge – Human Body Model	ESD HBM	2,000	٧	2
Electrostatic Discharge – Machine Model	ESD MM	200	V	В


Notes:


- 5. For a device mounted with the exposed collector pad on 15mm x 15mm 1oz copper that is on a single-sided 1.6mm FR4 PCB; device is measured under still air conditions whilst operating in a steady-state.
- Same as Note 5, except the device is mounted on 25mm x 25mm 2oz copper.
- Same as Note 5, except the device is mounted on 50mm x 50mm 2oz copper.
- Same as Note 7, whilst measured at t < 5 seconds.</li>
   Thermal resistance from junction to solder-point (at the end of the collector lead).
   Refer to JEDEC specification JESD22-A114 and JESD22-A115.




# **Thermal Characteristics and Derating Information**

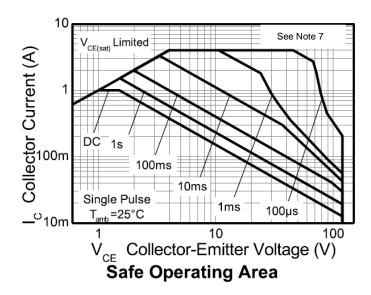





**Transient Thermal Impedance** 



**Transient Thermal Impedance** 



# Electrical Characteristics (@T<sub>A</sub> = +25°C, unless otherwise specified.)


Characteristic	Symbol	Min	Тур	Max	Unit	Test Condition
OFF CHARACTERISTICS						
Collector-Base Breakdown Voltage	$BV_CBO$	140	300	_	V	$I_C = 100\mu A$
Collector-Emitter Breakdown Voltage (Base Open) (Note 11)	BV <sub>CEO</sub>	120	140		V	I <sub>C</sub> = 10mA
Emitter-Base Breakdown Voltage	$BV_{EBO}$	10	16		V	$I_E = 100\mu A$
Collector-Base Cutoff Current	I <sub>CBO</sub>	_	<1 —	100 10	nΑ μΑ	V <sub>CB</sub> = 120V V <sub>CB</sub> = 120V, T <sub>A</sub> = +100°C
Collector-Emitter Cutoff Current	I <sub>CES</sub>	_	<0.1	10	μA	V <sub>CE</sub> = 120V
Emitter-Base Cutoff Current	I <sub>EBO</sub>	_	<1	100	nA	$V_{EB} = 8V$
ON CHARACTERISTICS (Note 11)						
Static Forward Current Transfer Ratio	h <sub>FE</sub>	3k 3k 3k 1k	11k 12k 10k 5k	 30k 	_	$I_{C} = 50 \text{mA}, V_{CE} = 5 \text{V}$ $I_{C} = 500 \text{mA}, V_{CE} = 5 \text{V}$ $I_{C} = 1 \text{A}, V_{CE} = 5 \text{V}$ $I_{C} = 2 \text{A}, V_{CE} = 5 \text{V}$
Collector-Emitter Saturation Voltage	V <sub>CE</sub> (SAT)	_	0.8 1.1 1.1	0.9 1.5 1.5	V	$I_C = 250$ mA, $I_B = 25$ mA $I_C = 1$ A, $I_B = 1$ mA $I_C = 2$ A, $I_B = 5$ mA
Base-Emitter Saturation Voltage	V <sub>BE(SAT)</sub>	_	1.55	1.7	V	$I_C = 1A, I_B = 1mA$
Base-Emitter On Voltage	V <sub>BE(ON)</sub>	_	1.45	1.7	V	$I_C = 1A$ , $V_{CE} = 5V$
SMALL SIGNAL CHARACTERISTICS						
Transition Frequency	f⊤	_	120	_	MHz	$I_C = 100 \text{mA}, V_{CE} = 10 \text{V},$ f = 20 MHz
Input Capacitance	C <sub>IBO</sub>	_	68	90	pF	$V_{EB} = 500 \text{mV}, f = 1 \text{MHz}$
Output Capacitance	$C_{OBO}$	_	12.8	25	pF	$V_{CB} = 10V, f = 1MHz$
Delay Time	t <sub>D</sub>	_	507	_	ns	101
Rise Time	t <sub>R</sub>	_	136	_	ns	$V_{CC} = 10V$ , $I_{C} = 500$ mA,
Storage Time	t <sub>S</sub>	_	910	_	ns	$-1_{C} = 500 \text{mA},$ $-1_{B1} = -1_{B2} = 0.5 \text{mA}$
Fall Time	t <sub>F</sub>	_	369	_	ns	181 – 182 – 0.3111A


Note:


11. Measured under pulsed conditions. Pulse width  $\leq$  300 $\mu$ s. Duty cycle  $\leq$  2%.





## Typical Electrical Characteristics (@T<sub>A</sub> = +25°C, unless otherwise specified.)



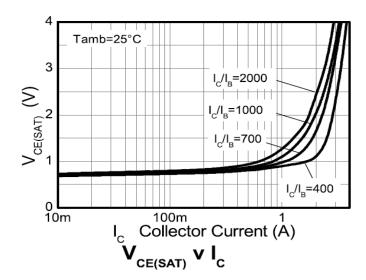

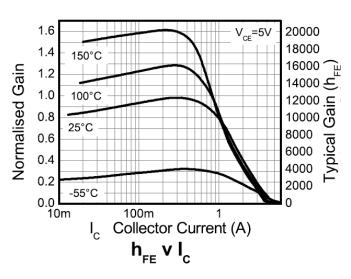




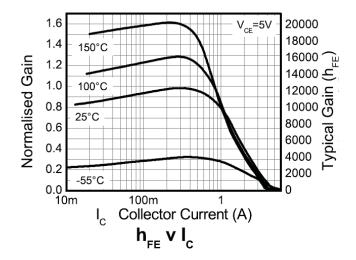



# **Package Outline Dimensions**

Please see http://www.diodes.com/package-outlines.html for the latest version.

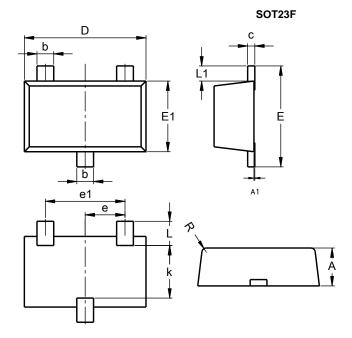


SOT23F						
Dim	Min Max Typ					
Α	0.80	1.00	0.90			
b	0.35	0.50	0.44			
C	0.10	0.10 0.20 0.16				
D	2.80 3.00 2.90					
e	0.95 REF					
e1	0.190 REF					
Е	2.30 2.50 2.40					
E1	1.50 1.70 1.65					
k	1.20 – –					
L	0.30 0.65 0.50					
L1	0.30	0.50	0.40			
R	0.05	0.15	_			
All Dimensions in mm						

# **Suggested Pad Layout**

Please see http://www.diodes.com/package-outlines.html for the latest version.

#### SOT23F



Dimensions	Value (in mm)
С	0.95
Х	0.80
Y	1.110
Y1	3 000

Note: For high voltage applications, the appropriate industry sector guidelines should be considered with regards to creepage and clearance distances between device Terminals and PCB tracking.



#### **IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

#### **LIFE SUPPORT**

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
  - 1. are intended to implant into the body, or
  - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2016, Diodes Incorporated

www.diodes.com