

RoHS 环保

A型

REV.	ECN NO.	REVISED	DATE

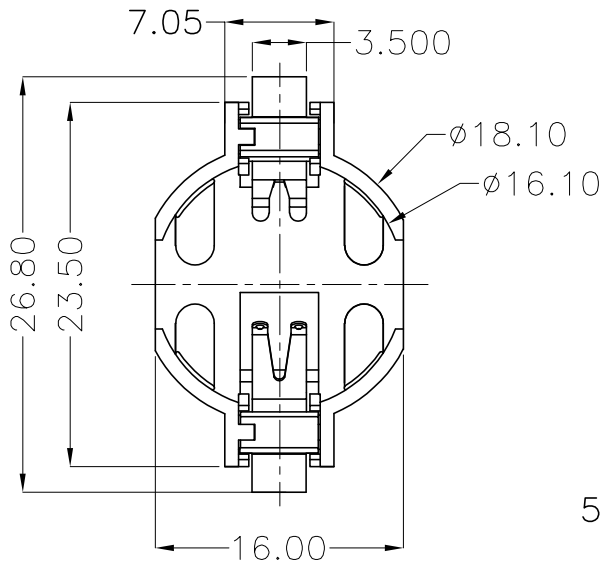

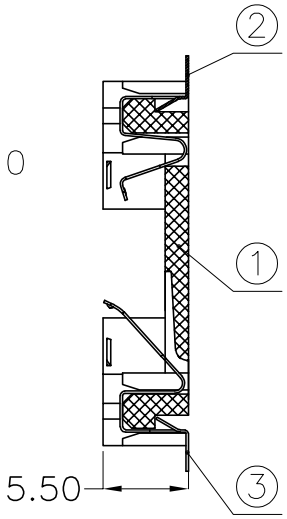

NOTE:

1.MATERIAL:

a.HOUSING:LCP UL94V-0

b.CONTACTS:C5191 T=0.15MM Sn-PLATING

2.ELECTRIC:

a.CONTACT RESISTANCE: 50 MILLIOHMS MAX

b.INSULATION RESISTANCE: 100 MEGA OHMS MIN

c.DIELECTNIC VOLTAGE: 500V AC ONE MINUTE

d.OPERATING TEMPERATURE: -25°C~+85°C

3.PACKAGING:


a.PLASTIC TRAY

b.TAPE OR REEL

ORDERING INFORMATION


BS-16-B4AK004

- 电池座系列
- BS-16系列
- SMT 180° TYPE
- PLATING: K-Sn-PLATING
- MATERIAL: 4A-LCP WHITE

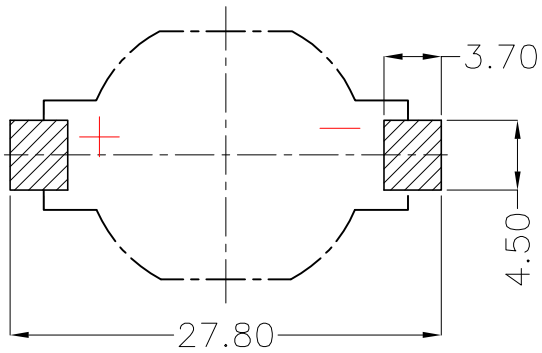

PCB Layout Diagram

Top View



工程部

2026-01-05

LQ. HUANG

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
3	TERMINAL(-)	1	C5191 T=0.15mm	Hight hot Sn-Plating
2	TERMINAL(+)	1	C5191 T=0.15mm	Hight hot Sn-Plating
1	HOUSING	1	LCP UL94 V-0	WHITE

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: X :±0.30 X.X :±0.25 X.XX :±0.20 X.XXX :±0.10

ANGLES: X :±3°

A-PD


SHEET 1 OF 3

MYOUNG 美阳 www.meiyangdz.com


DSND	Huanglieqing	DATE	2026-01-05	TITLE: BS-1632-2 Sn SMT
CHKD	Linanzuo	DATE	2026-01-05	
APVD	Xueshunyong	DATE	2026-01-05	PART NO.: BS-16-B4AK004
SCALE: 1:1	SIZE: A4	VIEW:		
UNIT: mm	REV.: A/0	OBJECT: MY		DRAW NO.:MY-CP-0104

RoHs 环保


A型




Each plate contains 7 rows, each row contains 10 PCS, for a total of 70 PCS




21 plastic trays are bundled together, with an empty plastic tray at the top, totaling 1400 products.



Seal the top and bottom of the outer box with adhesive tape to form the character "工".

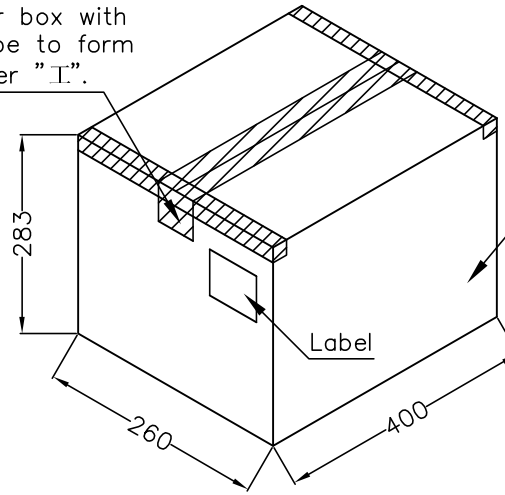

Large cardboard box 5600PCS/box

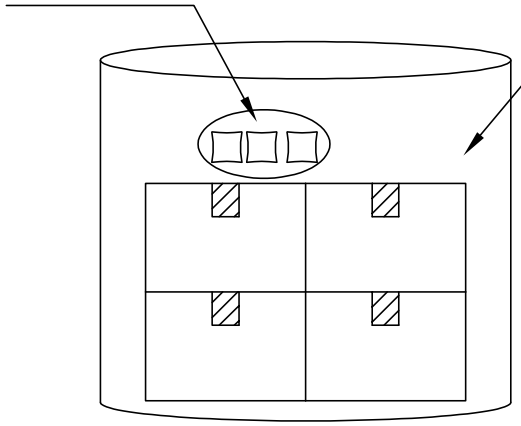

工程部

2026-01-05


H. WANG


Packaging information:
1. Each plate contains 7 rows, each row contains 10 PCS, for a total of 70 PCS;
2. 21 plastic trays are bundled together, with an empty plastic tray at the top, totaling 1400 products;
3. Each small cardboard box contains 20 plastic trays products, totaling 1400 products;
4. Each outer box contains 4 small paper boxes, totaling 5600 products
5. Seal the top and bottom of the outer box with adhesive tape to form the character "工";


UNLESS OTHERWISE SPECIFIED TOLERANCES	MYOUNG 美阳 www.meiyangdz.com				
DECIMALS: X :±*** X.X :±*** X.XX :±*** X.XXX :±*** ANGLES: X :±*** X.X :±***	DSND	WangHeng	DATE	2026-01-05	TITLE: BS-1632-2 Sn SMT 吸塑包装
	CHKD	HuangLieqing	DATE	2026-01-05	
	APVD	XueShunyong	DATE	2026-01-05	PART NO.: BS-16-B4AK004
A-PD	SCALE:	SIZE: A4	VIEW:		
SHEET 2 OF 3	UNIT: mm	REV.: A/0	OBJECT: MY		DRAW NO.:MY-BZ-0016


RoHs 环保


A型

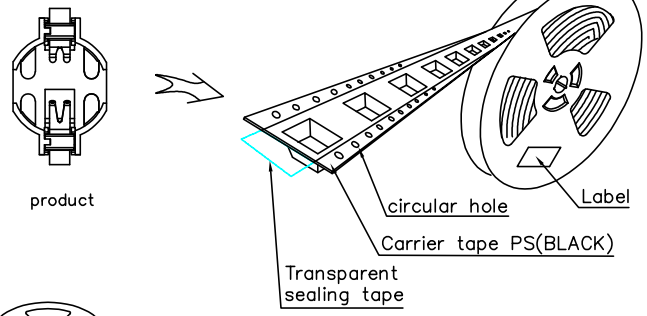


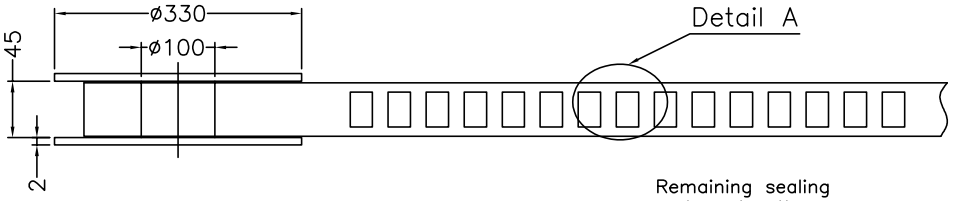

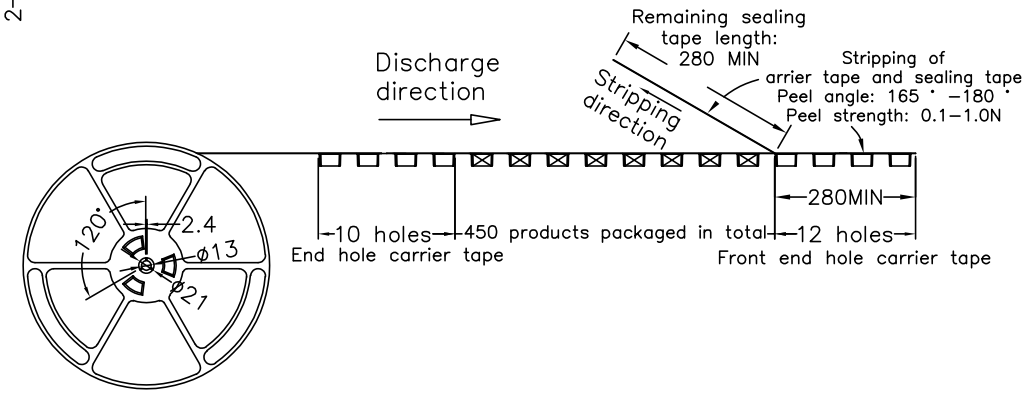



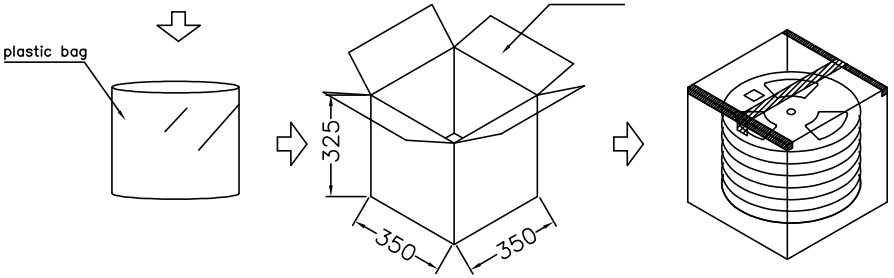

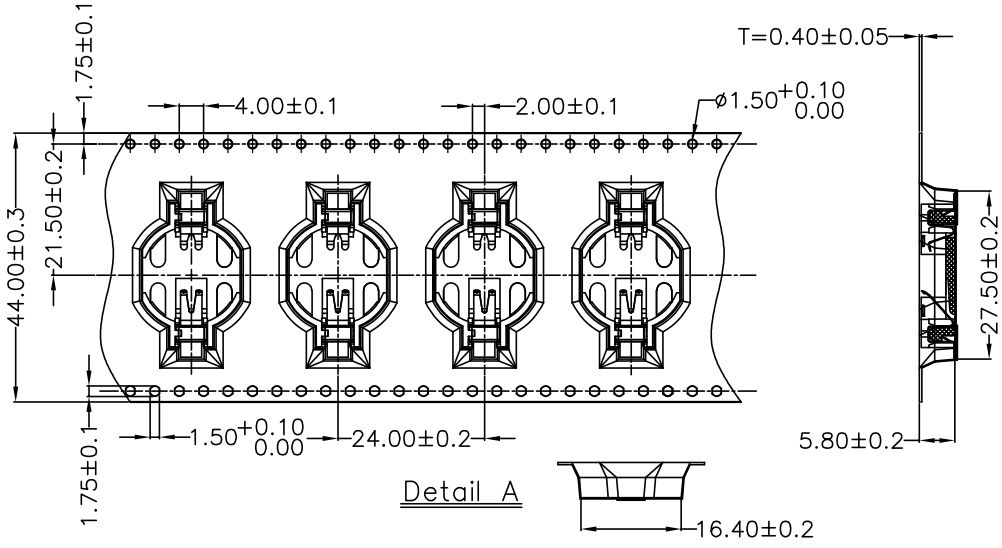

Packaging information:

1. Each roll contains 450 products, with relevant labels attached to the outside of the roll;
2. Put every 6 rolls in a plastic bag;
3. Each outer box contains 6 plates, with a total of 2700 products;
4. Seal the top and bottom of the outer box with adhesive tape to form the character "工";
5. Battery holder packaging material BS-1632-2 SMT roll pack(BS-1632-2-01-R).

工程部
2026-01-05
H. WANG

UNLESS OTHERWISE SPECIFIED TOLERANCES	MYOUNG 美阳 www.meiyangdz.com				
DECIMALS: X :±*** X.X :±*** X.XX :±*** X.XXX :±*** ANGLES: X :±*** X.X :±***	DSND	WangHeng	DATE	2026-01-05	TITLE: BS-1632-2 Sn SMT 卷装
	CHKD	HuangLieqing	DATE	2026-01-05	
	APVD	XueShunyong	DATE	2026-01-05	PART NO.: BS-16-B4AK004-R
A-PD	SCALE:	SIZE: A4	VIEW:		
SHEET 3 OF 3	UNIT: mm	REV.: A/0	OBJECT: MY		DRAW NO.:MY-BD-0054