

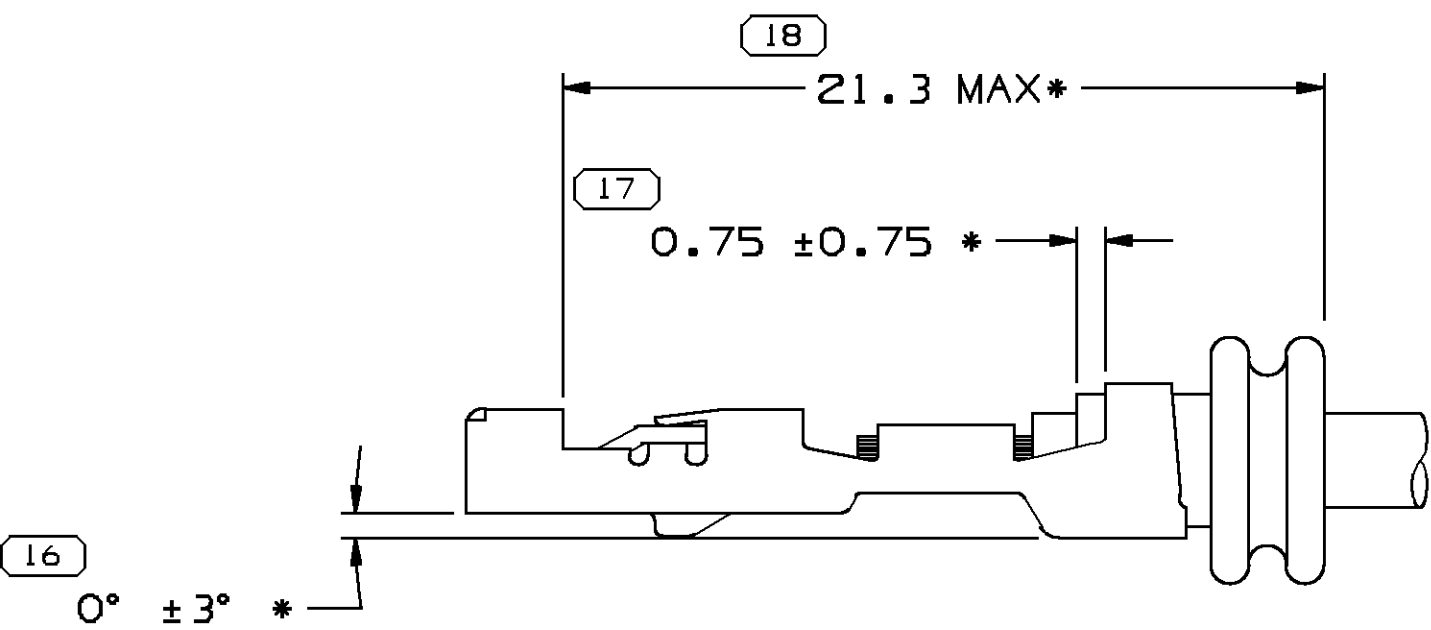
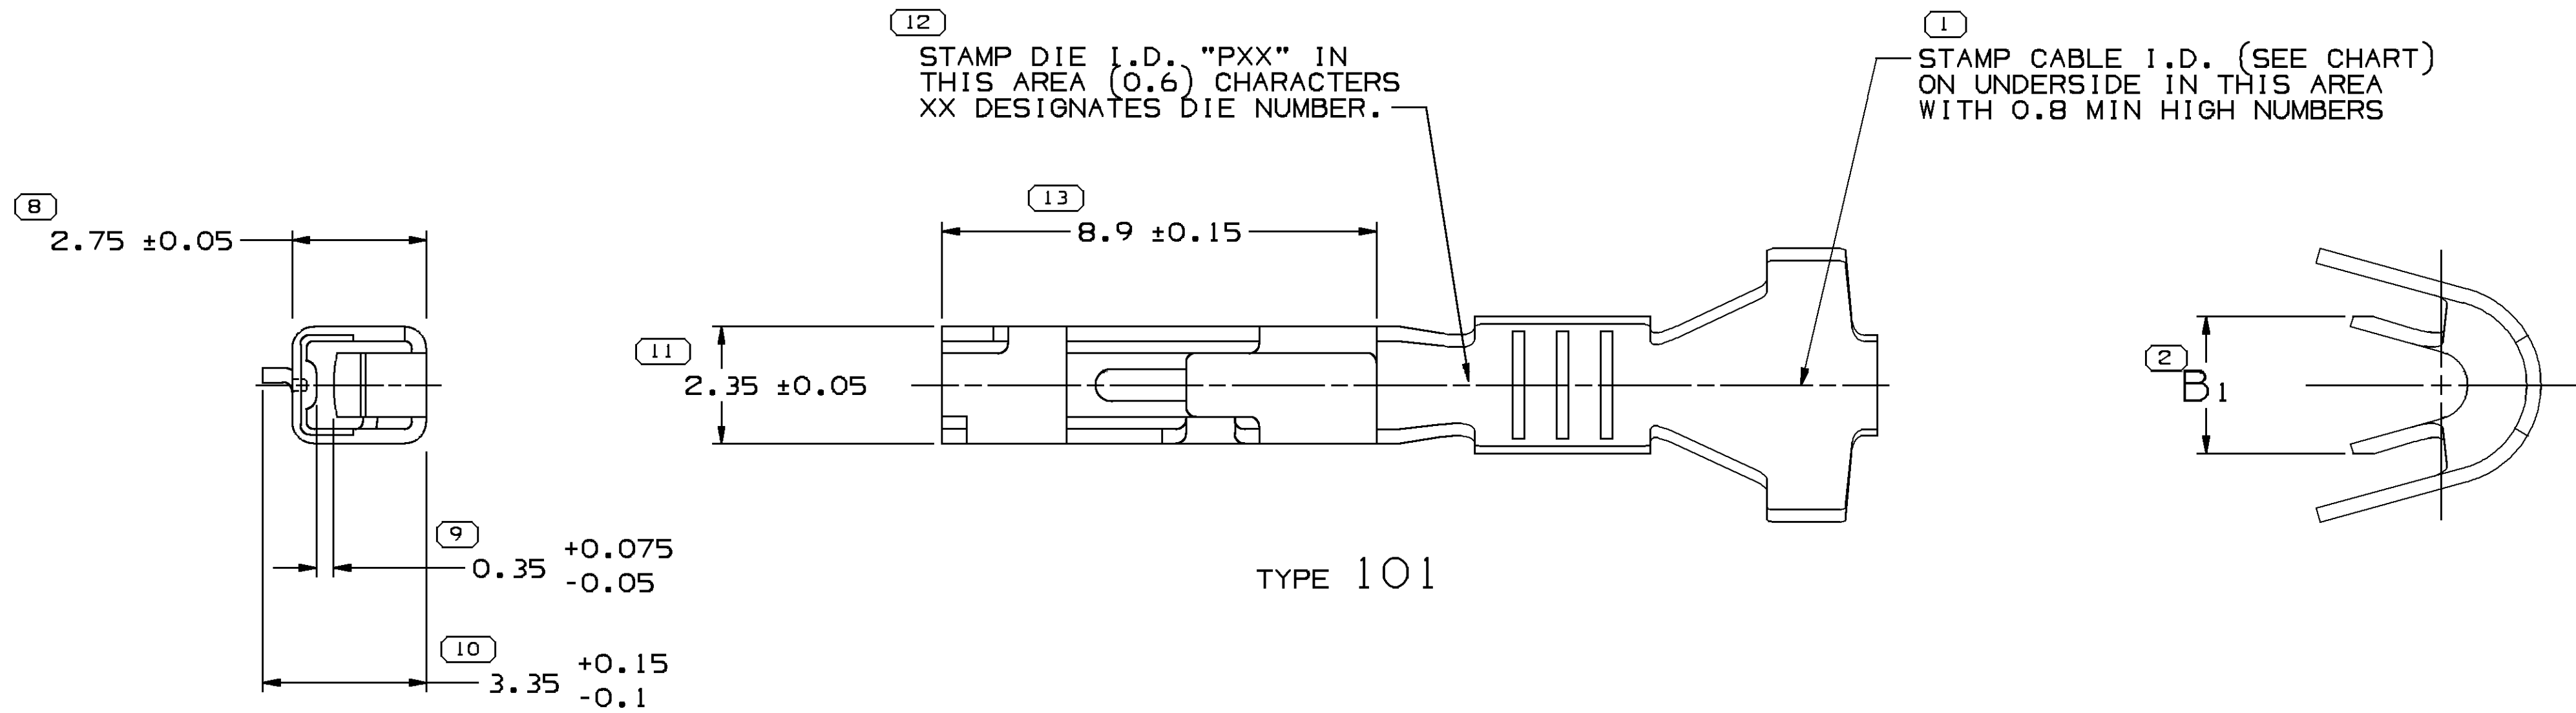


SYMBOL DEFINITION		
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL ○ DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	18
	LAST NO. USED	18

MISSING SYMBOLS		DWG STATUS				ZONE	REVISION HISTORY	AUTH	DR	APV	APV 2
DATE	STG	REV	N/P	CHG							
NO MISSING SYMBOL NUMBER	30JL02	R	01	-			CLEARED REVISION COLUMN: ALL PARTS - REDRAWN TO PD & UPDATED PDM ATTRIBUTES	226419	JVM	JVM	TTP
	12SE03	R	02	-	-		REVISED GRAPHICS	241005	LOA	FKV	CD
	17SE03	R	03	-	-		15326266 - UPDATED PDM ATTRIBUTES	245987	ADK	BB	TM
	24OC03	R	04	-	-		UPDATED REVISION LEVEL IN CHART.	246088	LMB	LMB	RF
	16AU04	R	05	-	-		ADDED TERMINAL I.D. NOTE; REMOVED "PXX" FROM GRAPHICS	258116	TSH	TSH	RF
	16MY05	R	06	-	-		ALL PARTS - ADDED 3 COLUMNS TO CHART	268254	JS	JS	LN
	05NO08	R	07	-	-		ALL PARTS - UPDATED PDM ATTRIBUTES	406683	RHG	JHP	RHG
	16MR10	R	08	-	-		ALL PARTS - UPDATED PDM ATTRIBUTES	410248	FRE	FRE	VMR
	04AU10	R	09	-	-		ALL PARTS - ADDED PLATING NOTE, UPDATED MAT'L CALLOUT AND ADDED CONTACT AREA & CRIMP AREA COLUMNS ON CHART	411497	JRL	JRL	VMR
	30SE10	R	10	-	-		ALL PARTS - UPDATED PLATING NOTE	412114	AJP	JVM	VMR
	23MY11	R	11	-	-		ALL PARTS - ADDED "PREFERRED MAT'L SIZE" COLUMN	414345	JAR	JAR	VMR

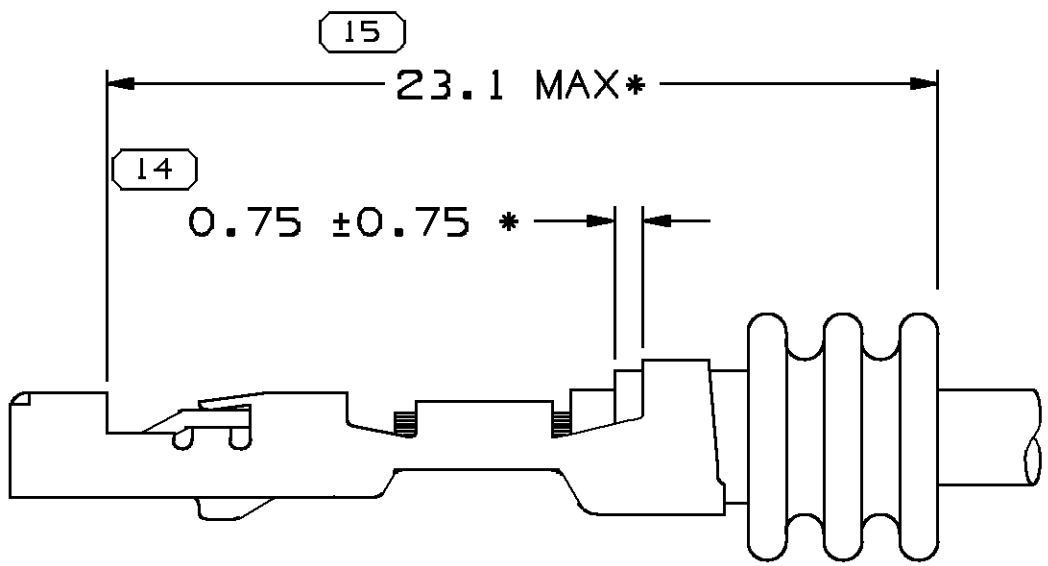

2 RIB SEAL POSITION REF
AND TERMINAL/CABLE ALIGNMENT
SCALE 5:1

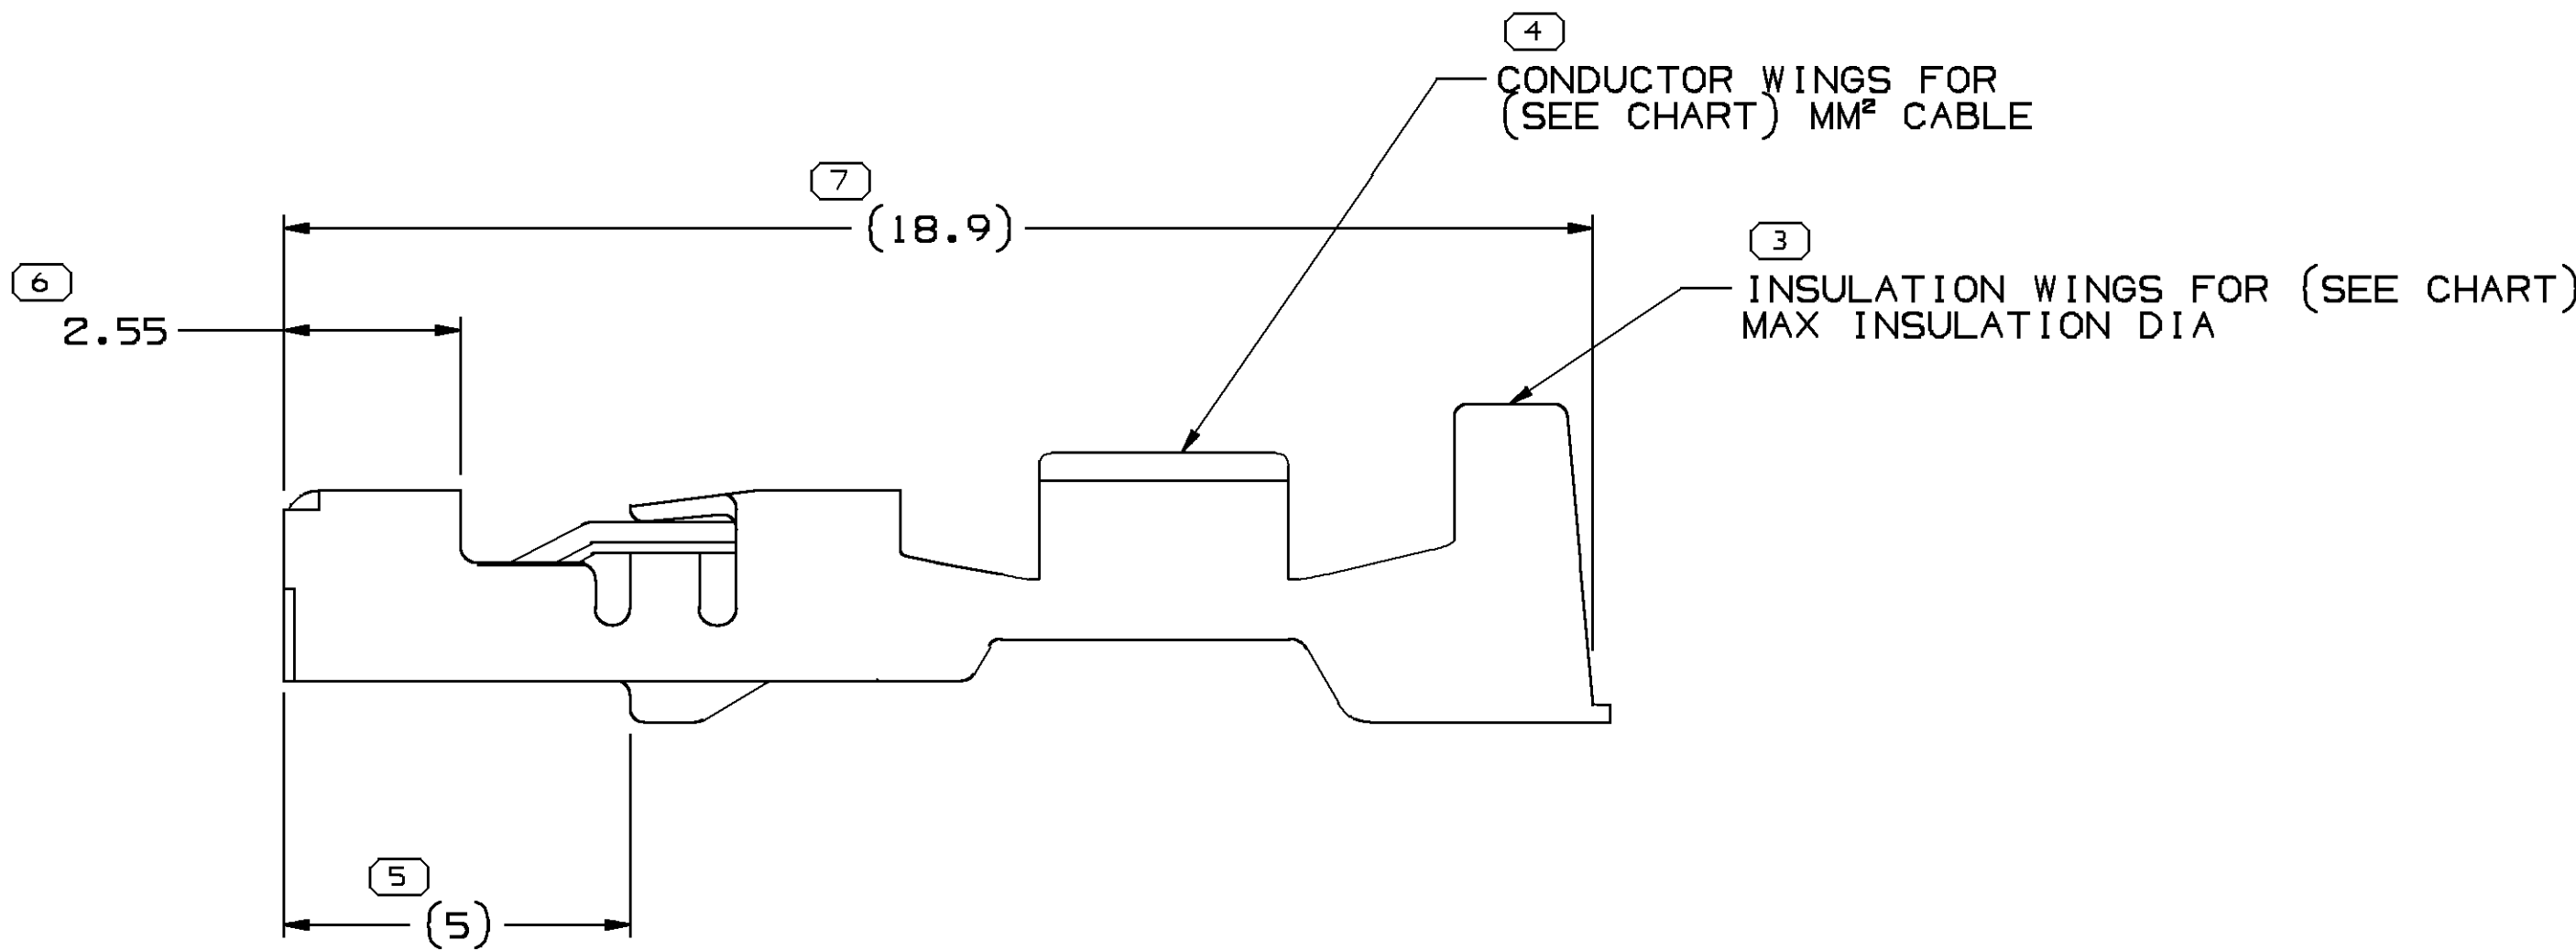

3 RIB SEAL POSITION REF
SCALE 5:1

NOTES

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION. (SEE MATH MODEL FOR PRECISE DIMENSIONS.) FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
- REFERENCE MATING COMPONENTS OR EQUIVALENT:
TERMINAL - 15304706
- * DENOTES DIMENSIONS MADE AT CUT-OFF AND CRIMP DIE.
- DO NOT PROBE, TEST OR OTHERWISE CONTACT THE INTERIOR REGION (THE SPRING OR ANY MOVING PART) OF THIS TERMINAL. SEVERE DAMAGE CAN OCCUR, COMPROMISING THE PERFORMANCE OF THE ELECTRICAL INTERFACE.
- PLATING TYPE:
1. REFLOW TIN 1.9-3.3 MICROMETERS THICK WITH A COPPER UNDERPLATE 0.5 MICROMETER TO 1.0 MICROMETER THICK.

PLATING TYPE INFORMATION SHOWN ABOVE IS REFERENCE ONLY. PLATING REQUIREMENTS ARE CONTAINED IN APPLICABLE MATERIAL SPECIFICATION.

15326267	04	AG	-	0.3 X 26.71	0.3 X 27.38	COPPER ALLOY	0.75 - 0.8	18	2.02 - 1.7	101	2.65	SEALED (MINI)	15305351	3.2 X 4 OVAL	I	I	
15326266	04	AG	-	0.3 X 26.71	0.3 X 27.38	COPPER ALLOY	0.35 - 0.5	21	1.85 - 1.2	101	2.1	SEALED (MINI)	15366022	3.2 X 4 OVAL	I	I	
15326265	04	AG	-	0.3 X 26.71	0.3 X 27.38	COPPER ALLOY	0.75 - 1	17	2.25 - 1.7	101	2.65	SEALED (GT)	15366060	Ø 4 ROUND	I	I	
15326264	04	AG	-	0.3 X 26.71	0.3 X 27.38	COPPER ALLOY	0.35 - 0.5	21	1.85 - 1.2	101	2.1	SEALED (GT)	15366021	Ø 4 ROUND	I	I	
PART	NO	REV	N/P	STATUS	PREFERRED MAT'L SIZE	ALTERNATIVE MAT'L SIZE	MAT'L DESCRIPTION	SIZE (MM²)	ID	DIA	TYPE	B ₁ ±0.2	APPLICATION	TYPICAL CABLE SEAL OR EQUIVALENT	TYPICAL SEALING CAVITY CONFIGURATION	CONTACT AREA PLATING TYPE (SEE NOTE 5)	CRIMP AREA PLATING TYPE (SEE NOTE 5)

PROCESS SENSITIVE DIMENSION	
DIMENSIONS ENCLOSED IN () INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED	
DIMENSIONAL RANGE (MM)	CHART (2)
FROM 0 TO 12	> 12
TOLERANCE UNLESS OTHERWISE SPECIFIED	
±0.1	±0.2
ANGULAR TOLERANCE	±2°

THIRD ANGLE PROJECTION	
USE MATH DATA	USE MATH DATA

DELPHI	
DELPHI PACKARD ELECTRICAL/ELECTRONIC ARCHITECTURE WARREN, OH	
DR	DATE
APV01 H. CASTRILLON	18AP97
APV02 FCO. KOPCA	21AP97
APV03 S.C. HSIEH	30SE98
APV04	
APV05	
SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI (0244990)	
DRAWING NAME	
TAXI TERM F 0T 150	
DRAWING NUMBER	
12191815	
SIZE	SCALE
A0	10:1
FRAME NO	SHEET NO
1 OF 1	2 OF
STG	REV
R	11